

SANITARY SYSTEMS

GENERAL CATALOGUE 2018/2019



OLI

Inspired by water...

CAPTIONS

-  Solid wall-Brick lined, floor standing toilet
-  Solid wall-Brick lined, Wall-hung Toilet (wc pans)
-  Solid wall-Brick lined, Wall-hung Toilet (washbasin)
-  Solid wall-Brick lined, Wall-hung Toilet (urinal)
-  Dry wall, Wall-hung Toilet (wc pans)
-  Dry wall, Wall-hung Toilet (urinal)
-  Dry wall, Wall-hung Toilet (washbasin)
-  Solid wall-Brick lined (rails or urinal dividers)
-  Dry wall
-  Supports up to 400kg
-  Without maintenance
-  Start/Stop Flush
-  Dual Flush
-  Single Flush
-  Saves up to 9L of water per day
-  Mechanic actuation
-  Pneumatic actuation
-  Capacitive sensor
-  Electronic actuation
-  AC power-mains
-  OLIpure System
-  Hydroboost 
-  Certification of product water efficiency
-  120mm thick
-  80mm thick
-  90mm thick
-  150mm thick
-  180mm thick
-  190mm thick
-  Front or top activation
-  Reduce Mobility
-  Hygiene 100%
-  Vandal resistance
-  Economic
-  Side water supply connection
-  Bottom water supply connection
-  Anti-condensation lining
-  Stop Fire
- 2 inlet valve



INDEX

OLI	COMPANY INFORMATION	06
BIM	BIM	20
☆	SPECIAL PRODUCTS	23
plate	IN-WALL INSTALLATION SYSTEMS	42
frame	FRAMES	76
plate	CONTROL PLATES	86
plate	IN-WALL INSTALLATION SYSTEMS ACCESSORIES	114
plate	EXPOSED FLUSH CISTERNS	124
plate	EXPOSED FLUSH CISTERNS ACCESSORIES	132
universal mechanism	UNIVERSAL MECHANISMS	134
universal mechanism	UNIVERSAL MECHANISMS ACCESSORIES	145
floor-easy shower	FLOOR-EASY SHOWER	148
key	SPARE PARTS	162
box	PACKAGING DETAILS	202
key	WARRANTY	225

COMPANY





OLI

BIM



OLI-Sistemas Sanitários S.A., founded in 1954 in Aveiro, is the largest cistern producer in Southern Europe and owns OLI, a global brand of bath solutions, present in 80 countries on five continents.

In the large and modern industrial complex, with a total area of 82 thousand square meters and 389 employees, the entire value chain is controlled - from idea to industrialization, production and commercialization. The factory, recognized for innovation and awarded for efficiency, works 24 hours a day, 7 days a week, and ensures weekly production of 43 700 flushing cisterns and 64 000 mechanisms.

Over the years, OLI has created products that have, on a global scale, changed the daily experience in the bathroom. The WC has become more efficient and environmentally friendly, comfortable and accessible.



Over 20 years ago OLI was responsible for the mass production of the dual flush in flushing cisterns, an innovation now present all over the world and responsible for reducing water consumption by 50%.

Using patented technology and high quality manufacturing standards, OLI is recognized for constantly studying new and better solutions that increase water efficiency and accessibility for people with reduced mobility. From inlet valves, which allow the quick and silent filling of the cistern, to the resistant self-supporting structures that allow the user to adjust the height of the toilet.

Committed to sustainable development, the brand develops versatile solutions for application in new construction, and rehabilitation and renovation projects, with a contemporary design.

OLI believes in a water-efficient bathroom that is comfortable, accessible and safe for all to use. OLI will continue to be defined by innovation.

Since 1993, the company has been part of Silmar Group, headquartered in Italy, which operates in four sectors: heating, aluminium, plumbing and drainage, and fire safety. The group has 2957 employees and in 2017 had an annual turnover of 907 million euros.

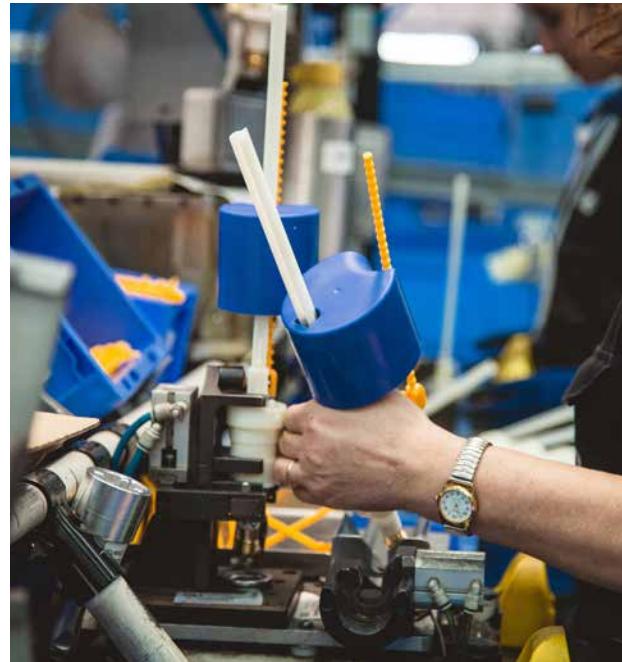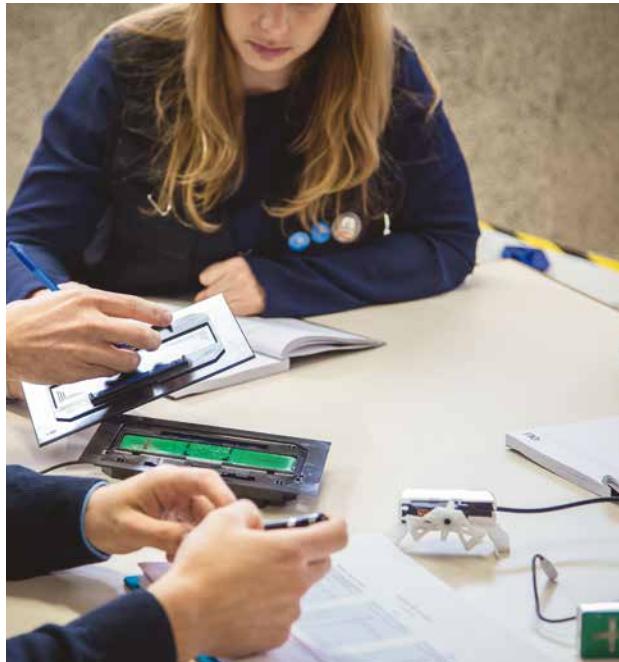

RESEARCH

On a daily basis, and in partnership with universities and research centres, OLI's Research and Development Centre works on the development of new ideas and solutions that increase water efficiency and accessibility for people with reduced mobility in the bathroom.

DEVELOPMENT

In partnership with universities and research centres, customers and other business partners OLI's Research and Development Centre works daily on the development of new ideas and solutions that increase water efficiency and the inclusion of people with reduced mobility in the bathroom.

Quality and Certifications






INNOVATION

Innovation defines OLI's DNA. The signature "Inspired by water" manifests OLI's commitment to placing innovation in the service of water preservation, with the overall goal of making the world a better place to live.

In the last five years, OLI has invested 10 million euros in research and innovation. Currently OLI has 41 active patents, and is one of the Portuguese companies with more patents in Europe.

DESIGN

In addition to being sustainable and accessible, OLI solutions are also characterized by their contemporary design with simple and refined lines.



International
Organization for
Standardization



www.oli-world.com

AWARDS





MILLENNIUM HORIZONTES AWARD – INOVATION 2017

Big company category



THE GREEN PROJECT AWARD 2016

Promoting water saving, received an honorable mention in the "Product or Service" category

GOOD DESIGN AWARD 2016

The award-winning solution, Glassy, is a self-sustainable control plate for in-wall flush cisterns with OLI's Hydroboost technology.

ARCHIPRODUCTS DESIGN AWARDS 2016

With the "Trumpet" control plate by Siza Vieira.

"I am very pleased with the prestigious "Best of Category 2016" award for the Trumpet control plate. The quality achieved is due to the competent and committed contribution of the technicians at OLI. It was a pleasure to evolve the design of the control plate with them. Álvaro Siza "



BATHROOM, ACCESSORIES AND EQUIPMENT

CATEGORY OF THE 2015

Self-sustainable Hydroboost system, a technology that creates its own energy, making use of the movement of water.

BATHROOMS, ACCESSORIES AND EQUIPMENT

CATEGORY OF THE 2015

Whose main goal is to "highlight the importance of innovation in the building sector".

CONSTRUCTION INNOVATION AWARD 2014

Easy Move is a cistern with a frame that allows adjusting the height of the toilet Other versions compliant with: the user's needs.


MARKETS


OLI's commercial activities extend to all continents with a presence in over 70 international markets. This extensive coverage reflects the ability of OLI to adapt the characteristics of its products to different installation practices and uses and above all to meet the different standard requirements, that often differ from one country to another.

These are some of the most important international markets where OLI is well known and appreciated: Portugal, France, Italy, Spain, Germany, Belgium, Holland, Austria, Finland, Denmark, Sweden, Czech Republic, Poland, Romania, Russia, Morocco, Egypt, Tunisia, Algeria, Senegal, Cote d'Ivoire, Saudi Arabia, Jordan, The United States of America, Brazil, Mexico and Australia.





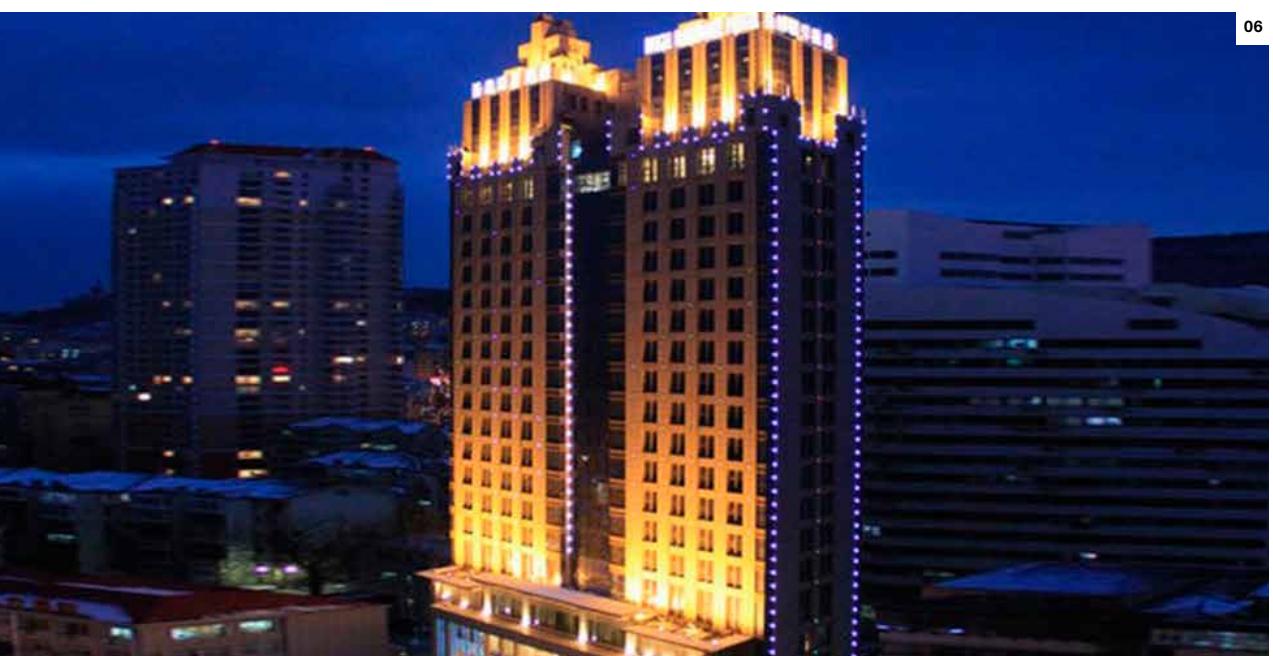

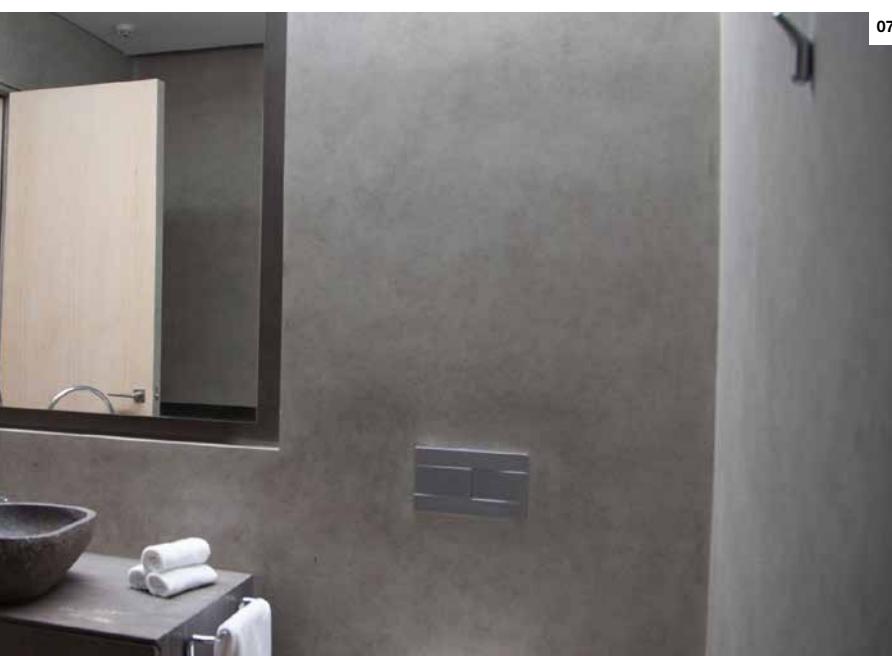

OLI

BIM

**01 HOTEL TOREL AVANTGARDE**

Porto

02 TERMINAL DE CRUZEIROS

Lisboa

03 HOTEL PINE CLIFFS SHERATON

Albufeira

04 HOSPITAL ICHILOV MEDICAL CENTER

Tel Aviv

05 TORRES ETIHAD

Abu Dhabi

06 HOTEL RADIANCE

Sydney

**07 HOTEL VIÑA VIK MILLAHUE PALMILLA
ABAJO**


Chile



08



09

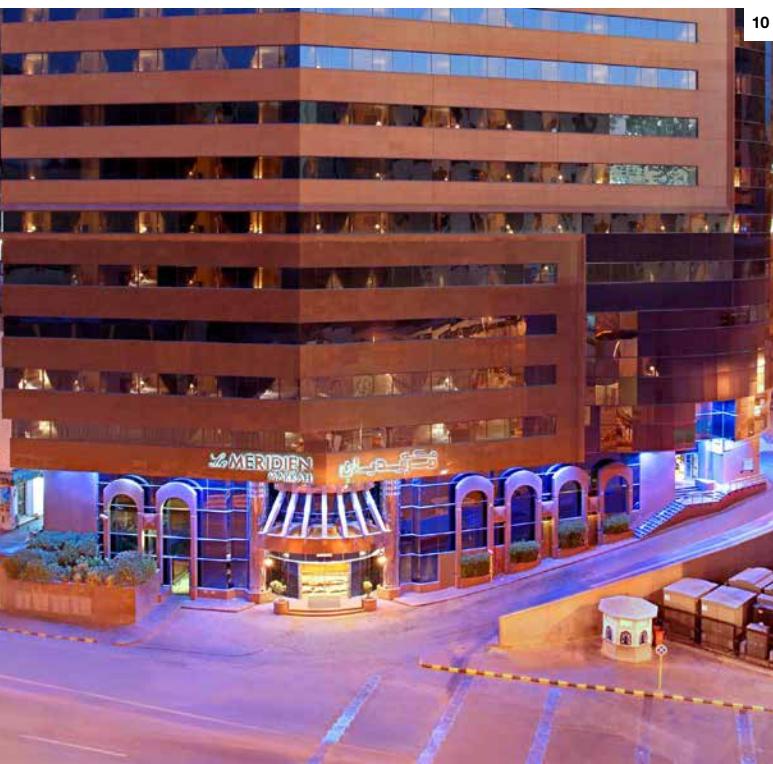

10



11



13



14



**08 HOTEL AMAZON DISCOVERY**

Peru

**09 BAYAT TOWERS JEDDAH**

Saudi Arabia

**10 MERIDIEN TOWERS KUDAI**

Saudi Arabia

**11 TOUR D2 LA DÉFENSE**

Paris

**12 HOTEL PALM COVE**

Australia

**13 HOTEL ERBIL ROTANA**

Iraq

**14 HOTEL CASTRI**


Italy

**15 GRAND HOTEL VILLA MEDICI**

Italy

**16 HOTEL RASA SAYANG SHANGRI-LA**

Malaysia

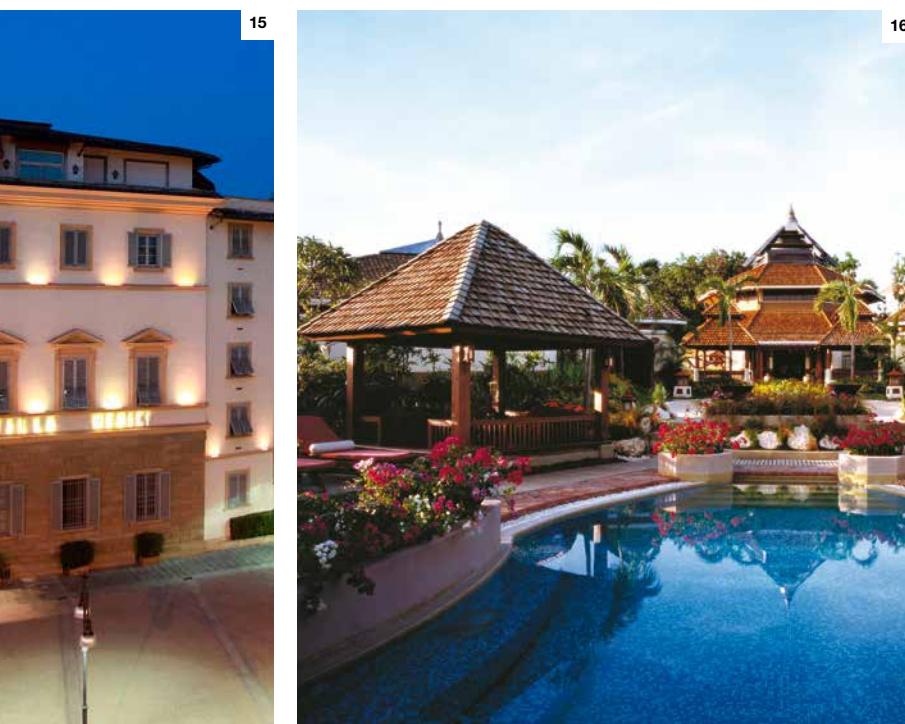

DELAYED INLET VALVE SYSTEM



Saving water in our everyday lives is now, more than ever, crucially important. In order to help people decrease their water consumption, and in turn decrease their water bill, OLI developed the Azor Plus inlet valve, a water-saving solution that equips the latest models of OLI cisterns. In this catalogue you will find several products equipped with the Azor Plus inlet valve.

The Azor Plus inlet valve can save up to 9 litres of water per day, which corresponds to a 12% reduction in your water bill*. The decreased consumption of water is due to the delayed refilling of water in the cistern, therefore avoiding water waste during flushing.

Thus, water begins to fill the cistern only after the flush valve is closed and all water flushed is efficiently used for cleaning the toilet. This inlet valve is not only ecological, but also quiet, and, therefore, certified by the NF standard, acoustic class 1. It is a versatile product with reduced dimensions, counter pressure closing system, quick filling and effective at any network pressure.

*when comparing average use in a single-family dwelling of 4 people.






SAVES UP TO **9L**
OF WATER PER DAY

01


While the cistern is emptied,
the inlet valve remains
closed.

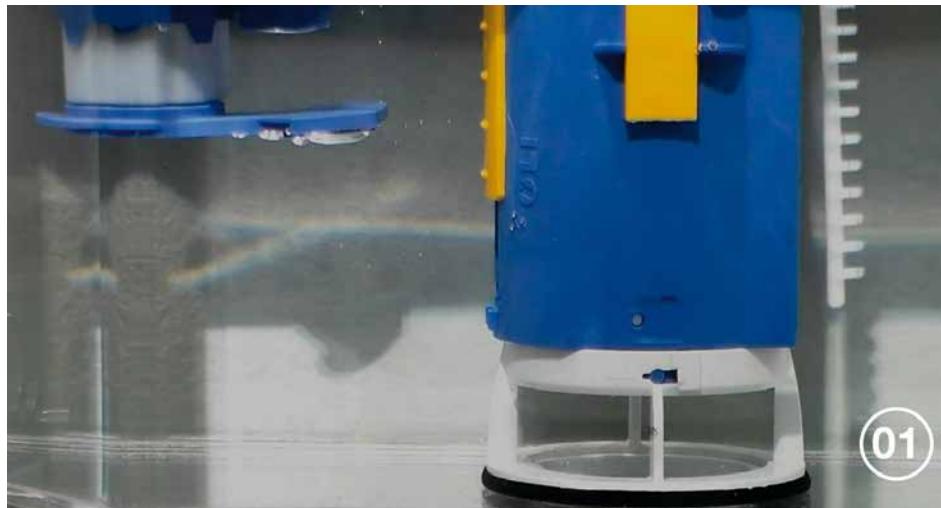

01

02

Once the water is flushed,
the outlet valve closes and
the delaying system makes
the inlet valve open to fill the
tank.

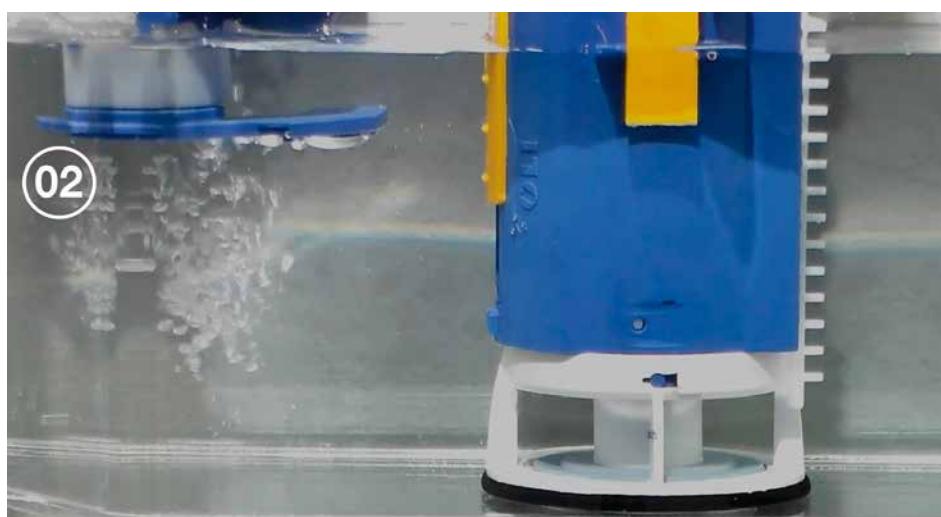

BUILDING INFORMATION MODELING





Building Information Modeling (BIM)

OLI is committed to being at the forefront of development in the construction sector. BIM is the new standard of design and construction. BIM facilitates the transfer of information between stakeholders and enables integrated management throughout the product life cycle.

With this methodology, OLI aims to boost the efficiency and creativity of construction projects through cooperative work with architects, engineers, contractors and owners, as well as reinforce its commitment to continuous innovation and the creation of a bathroom that doesn't waste water, is safe and accessible for all.

OLI will continue to progressively expand their library and offer customers a wide range of Sanitary System solutions. Many of OLI's products are available as BIM objects in Graphisoft Archicad®, Autodesk Revit® and SketchUp®.

For more information or to download OLI BIM files:

www.oli-world.com



NO TOUCH TECHNOLOGY

Hydroboost

- It uses the energy of water in motion;
- It generates and stores power from the water that fills the toilet tank;
- Power is used to activate the flush;
- There is no need to connect to the power grid or to replace batteries;
- Self-sustainable;
- Self-sufficient sensor activation system;
- Multiple colours available;
- Suitable for intensive use.

AC POWER-MAINS



- Innovative concept with capacitive sensors;
- Easy installation;
- Plug and Play.






Control
Plates



Sanitary
Module

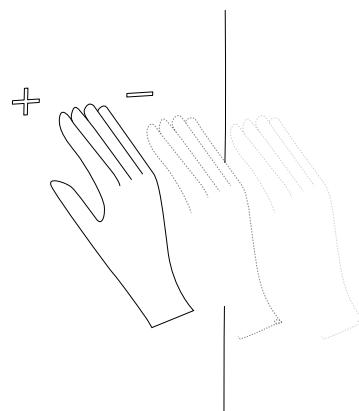

OLIpure®




- **Universal:**

Compatible with existing liquid disinfectants WC on the market.

- **Long lasting:**

Storage capacity of 450ml.

OLI

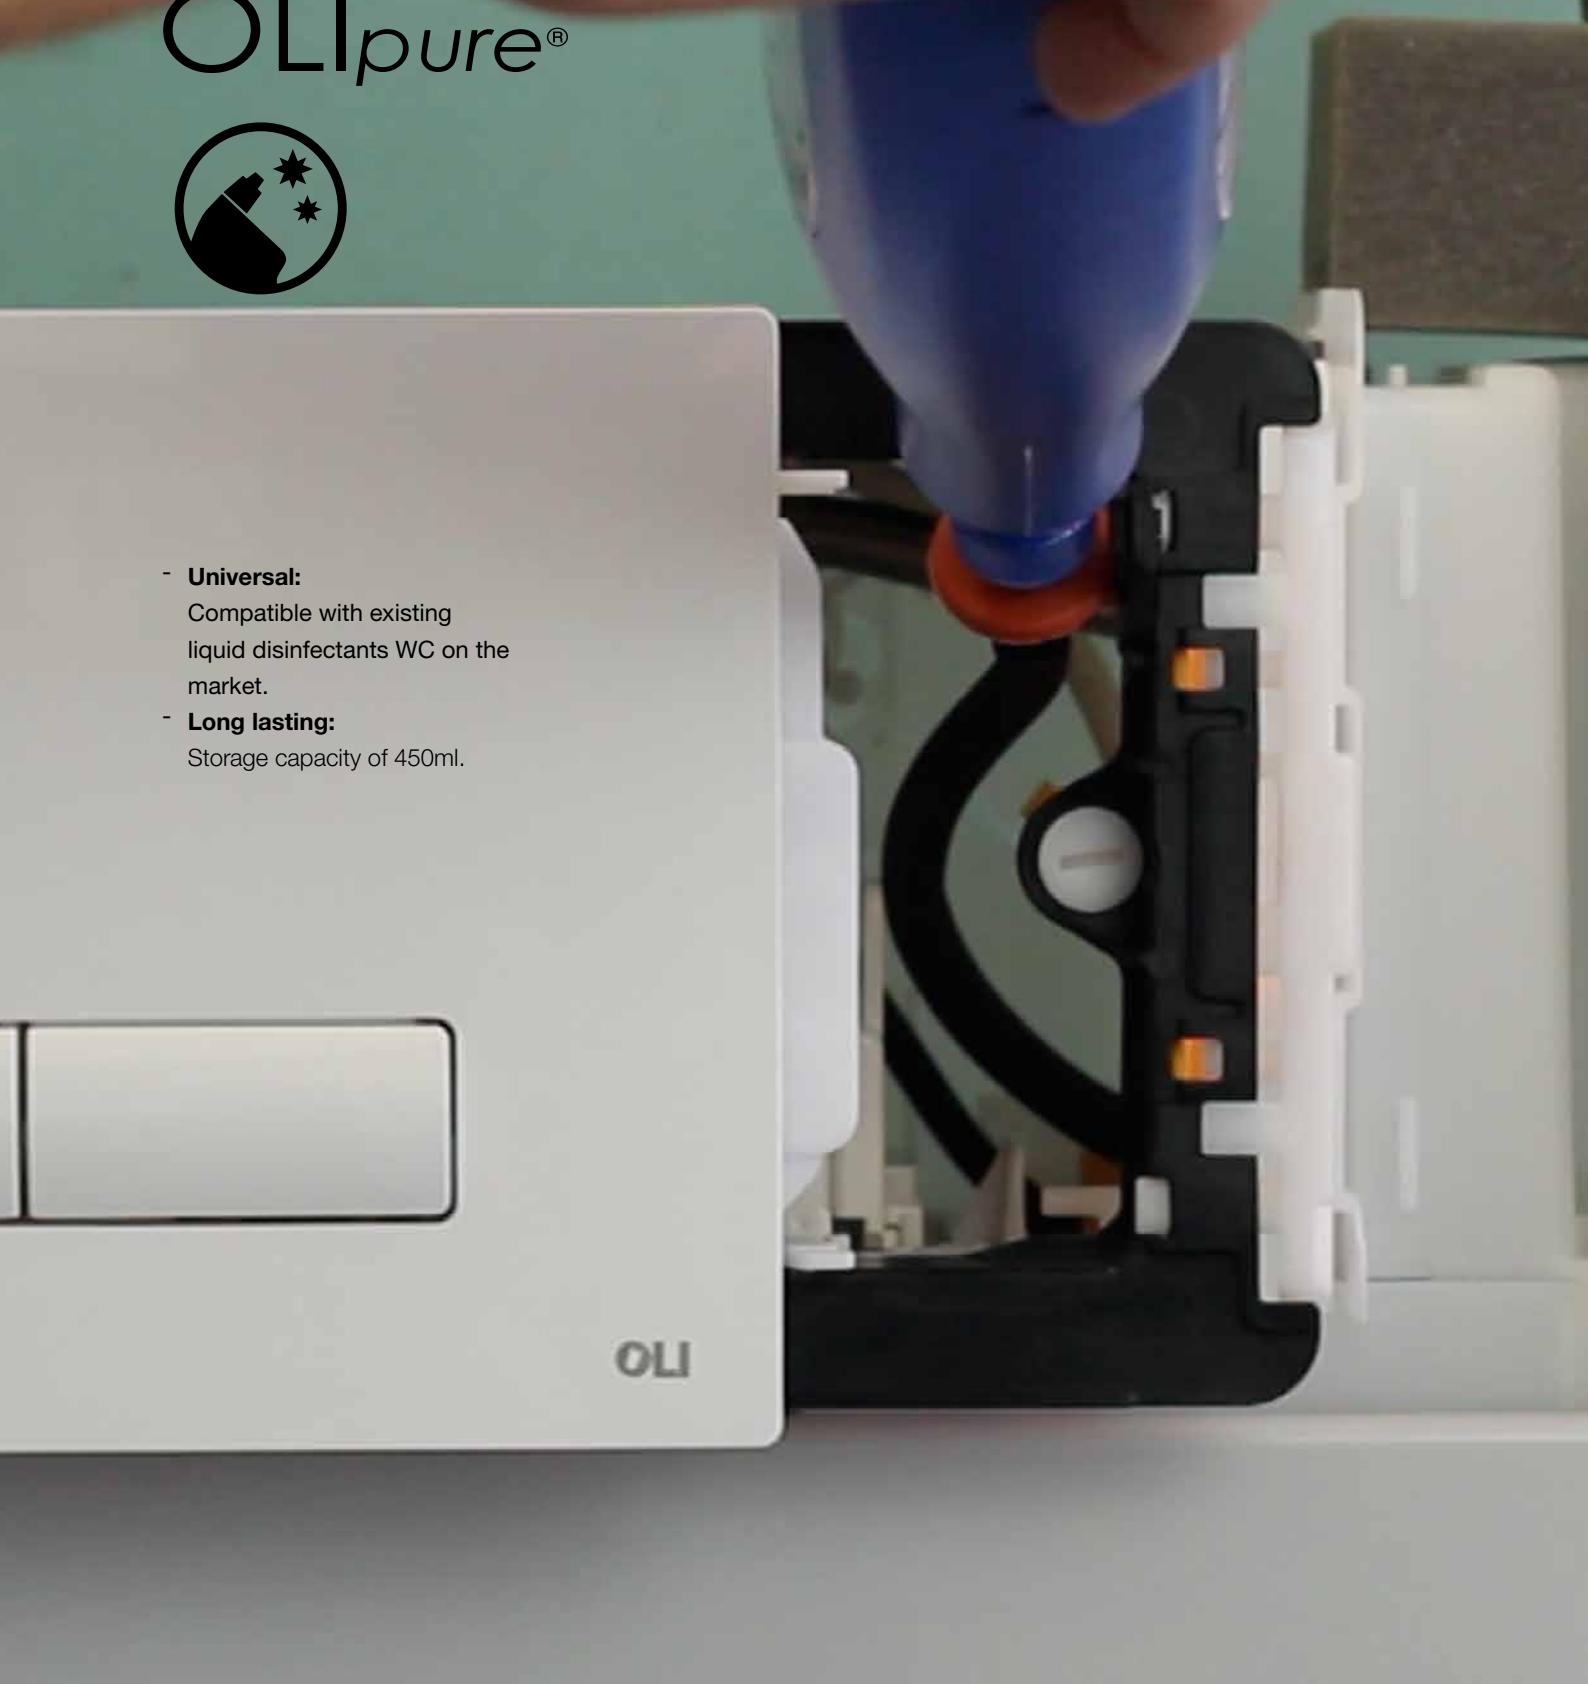

OLIPure is a self-contained system, placed inside the cistern, where the detergent is stored. On each flush the disinfectant is dispensed into the toilet.

OLIPure creates a fresh atmosphere and provides an immediate feeling of comfort and cleanliness, without any effort.

COMPATIBLE WITH



NARROW



GLAM



OLI74 PLUS



OLI120PLUS



EXPERT PLUS



QUARZO

SPECIAL PRODUCTS





SANITARY MODULE

QR is a sanitary module that adapts to many locations, designed for greater space saving in any bathroom. With reduced dimensions and incorporated high end technology, the QR sanitary module is the best option for a quick renovation of bathrooms and also for new sanitary installations.



EASY MOVE

Easy Move is the complete package. It offers a solution that is both aesthetically pleasing and highly functional that allows the user to vary the height of a toilet using a remote control.



HAPPY AIR

A fresh solution for air renewal in rooms without windows. High power extractor allows foul odours to be extracted directly from the WC through the flush pipe and condensation to be extracted through an elegant and discreet plate.




QR-INOX

Sanitary Module

QR-INOX is a Sanitary module that adapts to many locations, designed for a greater space saving in any bathroom. With reduced dimensions and incorporated high technology, the QR-INOX sanitary module is the best option for a quick renovation of bathrooms and new sanitary installations.



A universal and versatile solution for a quick and easy renovation of your bathroom.



NO TOUCH



With the QR-INOX NO TOUCH, there is no need to touch the module to activate the flush. The tempered glass is equipped with capacitive sensors and detects the approach of the human body at approximately 20 mm.

You can choose between the half flush and the complete flush by simply approaching your hand to the corresponding light symbol. With the QR-INOX NO TOUCH, hygiene and convenience are taken to a new level, by adopting a clean and sustainable technology.

Hydroboost



AC POWER-MAINS






BUTTON

The QR-INOX BUTTON comes with a stainless steel tilt selector button in a matt finish for activating the flush. The button's rounded shape provides the QR-INOX BUTTON with nobility and distinctiveness.



QR-INOX

WHITE

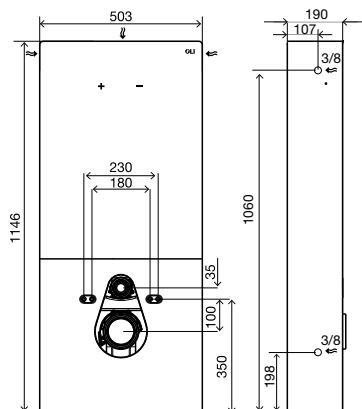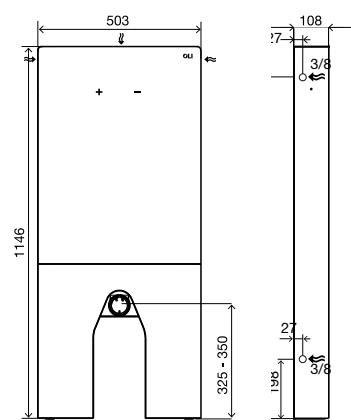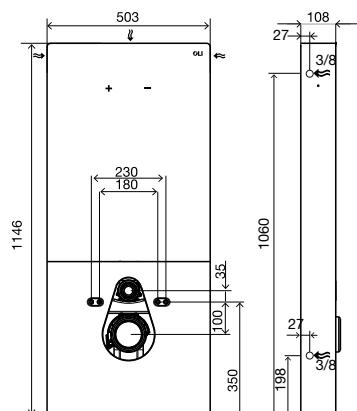

CÓD DESCRIPTION

HUNG WC

- 061565 QR-INOX White button Pneumatic hung wc
- 878815 QR-INOX White no-touch cap Hydroboost hung wc
- 878640 QR-INOX White no-touch cap AC hung wc NEW

FLOOR

- 061562 QR-INOX White button Pneumatic floor
- 878835 QR-INOX White no-touch cap Hydroboost floor
- 878642 QR-INOX White no-touch cap AC floor NEW

FREE-STANDING

- 879059 QR-INOX White Pneumatic Free-standing NEW
- 879061 QR-INOX White no-touch cap Hydroboost Free-standing NEW
- 879151 QR-INOX White no-touch cap AC Free-standing NEW

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- 190mm thick freestanding model;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No Touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 Plus cistern;;
- EN 14055 CL1;
- Global warranty of 10 years and 2 years on the electronic components.




QR-INOX Hung wc

Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

QR-INOX

BLACK

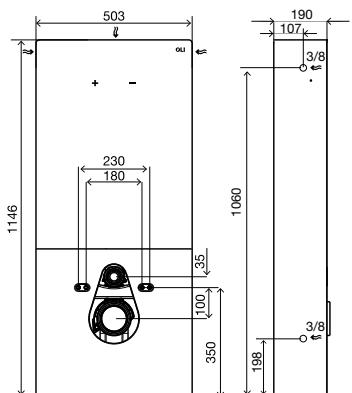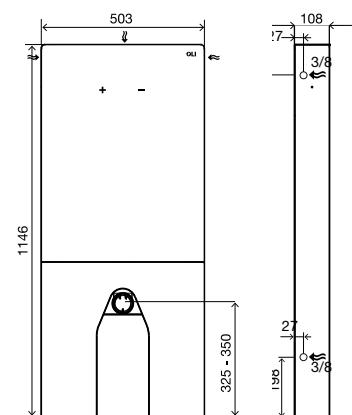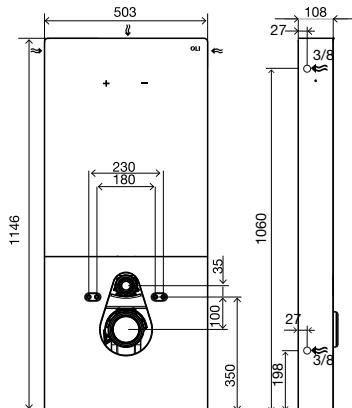

CÓD DESCRIPTION

HUNG WC

- 061568 ● QR-INOX Black button Pneumatic hung wc
- 878834 ● QR-INOX Black no-touch cap Hydroboost hung wc
- 878641 ● QR-INOX Black no-touch cap AC hung wc (NEW)

FLOOR

- 061563 ● QR-INOX Black button Pneumatic floor
- 878836 ● QR-INOX Black no-touch cap Hydroboost floor
- 878643 ● QR-INOX Black no-touch cap AC floor (NEW)

FREE-STANDING

- 879060 ● QR-INOX Black Pneumatic Free-standing (NEW)
- 879062 ● QR-INOX Black no-touch cap Hydroboost Free-standing (NEW)
- 879152 ● QR-INOX Black no-touch cap AC Free-standing (NEW)

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- 190mm thick freestanding model;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No Touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- Global warranty of 10 years and 2 years on the electronic components.


QR-INOX Hung wc

Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

QR-INOX

GOLD

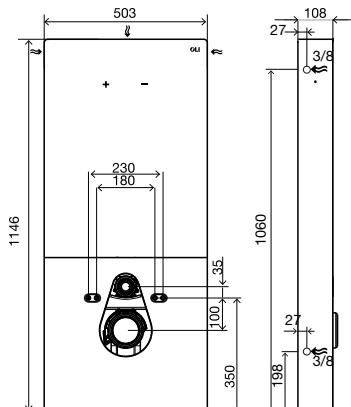


CÓD DESCRIPTION

878137 ● QR-INOX Gold button Pneumatic hung wc

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- 10 years warranty.

QR-INOX TAUPE

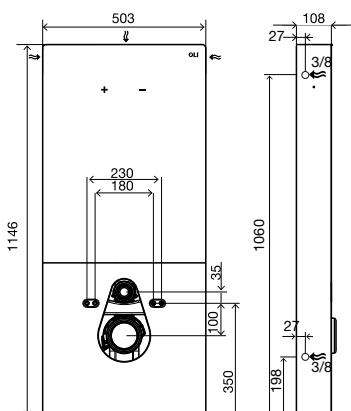

CÓD DESCRIPTION

878164 ● QR-INOX Taupe button Pneumatic hung wc

QR-INOX Hung wc

Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- 10 years warranty.


QR-INOX Hung wc

Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

QR-INOX


ANTHRAZITE

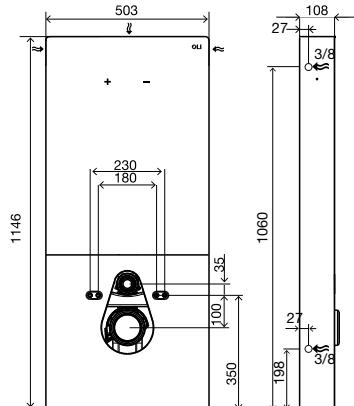

CÓD DESCRIPTION

878168 ● QR-INOX Anthracite button Pneumatic hung wc

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- 10 years warranty.

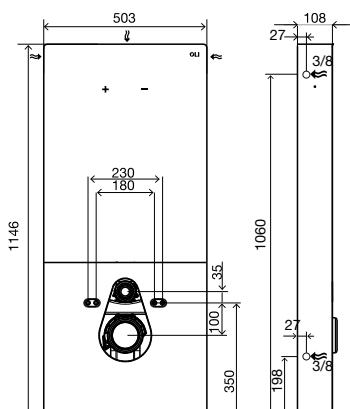QR-INOX
RED

CÓD DESCRIPTION

878172 ● QR-INOX Red button Pneumatic hung wc

QR-INOX Hung wc**Included**



- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

- Dual flush Sanitary Module 6/3 litres;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- 10 years warranty.

QR-INOX Hung wc**Included**

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

QR TOTAL BLACK

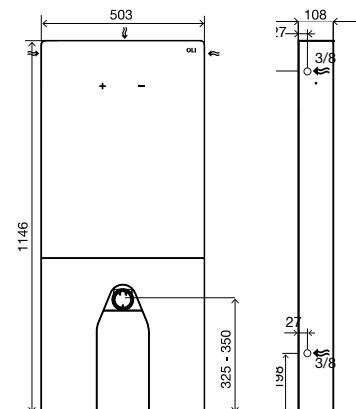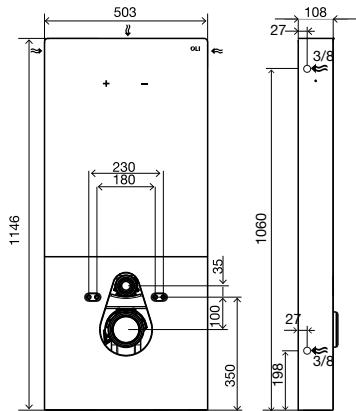

- Dual flush Sanitary Module 6/3 litres;
- One piece black coated, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No Touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- Global warranty of 10 years and 2 years on the electronic components.

QR-INOX Hung wc

Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.



CÓD DESCRIPTION



HUNG WC

- | | | |
|--|---|--|
| | 878141 ● QR TOTAL Black button Pneumatic hung wc | |
| | 878147 ● QR TOTAL Black no-touch cap Hydroboost hung wc | |
| | 878631 ● QR TOTAL Black no-touch cap AC hung wc | |

FLOOR

- | | | |
|--|---|--|
| | 878139 ● QR TOTAL Black button Pneumatic floor | |
| | 878140 ● QR TOTAL Black no-touch cap Hydroboost floor | |
| | 878630 ● QR TOTAL Black no-touch cap AC floor | |

QR TOTAL WHITE

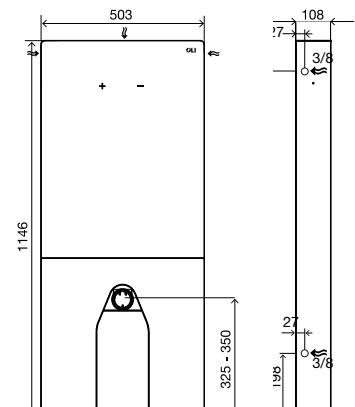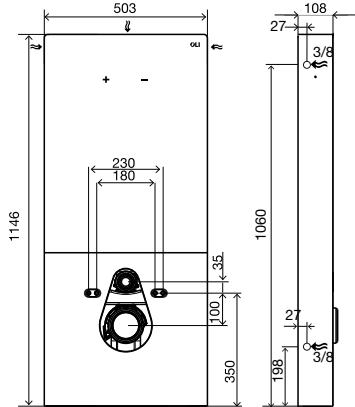

CÓD DESCRIPTION

HUNG WC

878152 ○ QR TOTAL White button Pneumatic hung wc



878153 ○ QR TOTAL White no-touch cap Hydroboost hung wc



878633 ○ QR TOTAL White no-touch cap AC hung wc

**FLOOR**

878150 ○ QR TOTAL White button Pneumatic floor



878151 ○ QR TOTAL White no-touch cap Hydroboost floor



878632 ○ QR TOTAL White no-touch cap AC floor



- Dual flush Sanitary Module 6/3 litres;
- One piece white coated, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Supplied with anti-condensation lining;
- 4 external water entry positions, or internally;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No Touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 Plus cistern;
- EN 14055 CL1;
- Global warranty of 10 years and 2 years on the electronic components.

QR-INOX Hung wc**Included**

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ½", 250mm.

Easy Move is the complete package. It offers a solution that is both aesthetically pleasing and highly functional that allows the user to vary the height of a toilet using a remote control. When simple movements, such as getting up from sitting on the toilet, become a problem, Easy Move intervenes by simplifying the lives of children, the elderly and people with reduced mobility. Easy Move is available with an optional handles kit for people with reduced mobility.

The Easy Move frame is compatible with all WC pan models on the market and guarantees modifications in height of up to 150mm, starting with a minimum height of 400mm and reaching a maximum height of 550mm; the structure has a depth of 200mm including the cistern and the motor.




The engine is extremely powerful with a thrust of more than 600kg, and offers maximum reliability and silence: when operating the noise of the motor is practically inaudible. The Easy Move structure also incorporates a flexible flush pipe and possesses a movement speed of 28mm/s thus allowing rapid alteration of the WC pan height.

Easy Move is available in both black or white tempered glass.



2014 innovation award about
technologies to support building
rehabilitation (Portugal)

EASY MOVE

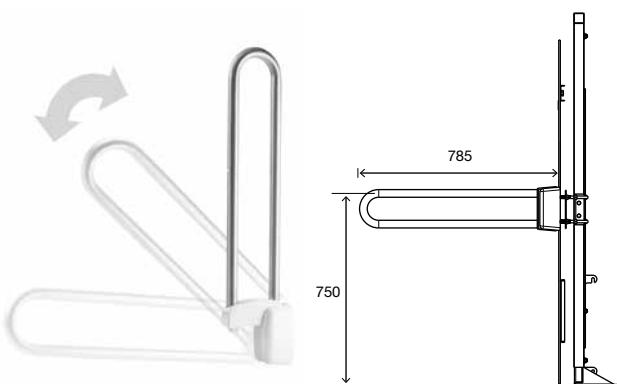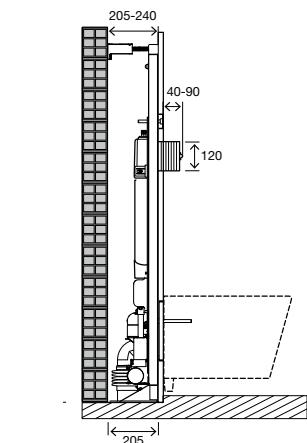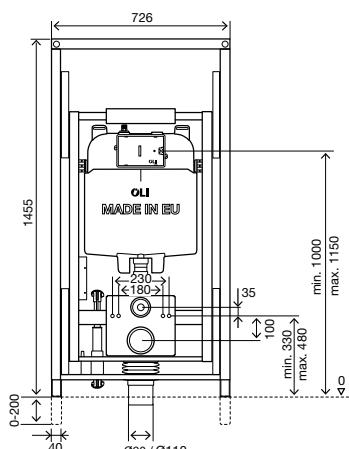

CÓD DESCRIPTION

005308 EASY MOVE

601831 ○ EASY MOVE glass White

601833 ● EASY MOVE glass Black

879143 Lift-up support rail + Toilet roll holder

- Adjustable frame with OLI74 Plus dual flush cistern 6/3 litres (see characteristics on page 56);
- Ergonomic system that is adjustable in height by 150mm;
- Compatible with all wall-hung WC pans;
- Silent electric engine;
- Power supply: 220V (50/60Hz);
- Power source: 350 Watt;
- Insulation: IP66;
- Movement velocity of 28mm/s;
- Sheet of tempered glass 6mm thick;
- Push power: 6000N (ca 600kgf);
- Traction power 3000N (ca 300kgf);
- Limit switch;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass front cover in black or white (6x400x1345mm);
- Global warranty of 10 years and 2 years on the electronic components.


Included

- Flexible outlet pipe;
- Remote activation, wireless;
- Electric engine;
- Wall-fixing material and pan fixing material;
- Inlet and outlet pan connection.


Compatibility

Wide range of control plates


HIDAC*




MECH.



PNEUM.*

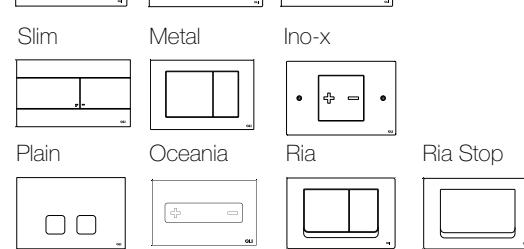


ELECTR.*

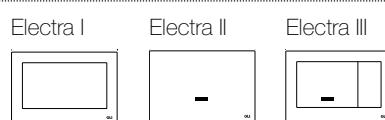

HAPPY AIR


System



- Dual function on a single aspiration fan;
- It can be installed on the wall or on the ceiling;
- Reduced noise <35 dB(A);
- High aspiration capacity 100 m³/h (70% odours, 30% condensation);
- Power Supply: 220V (50Hz); Insulation: IP35;
- The extractor fan operates at 230 V/50 Hz or 110V/50 Hz; Activated by switch or sensor;
- Five minute delayed switch-off;
- Anti-back flow valve;
- Paintable cover panel;
- Compatible with OLI74 Plus Happy Air and all its control plates (see compatible control plates Page 90);
- Global warranty of 10 years and 2 years on the electronic components.

Happy Air system Includes:


- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

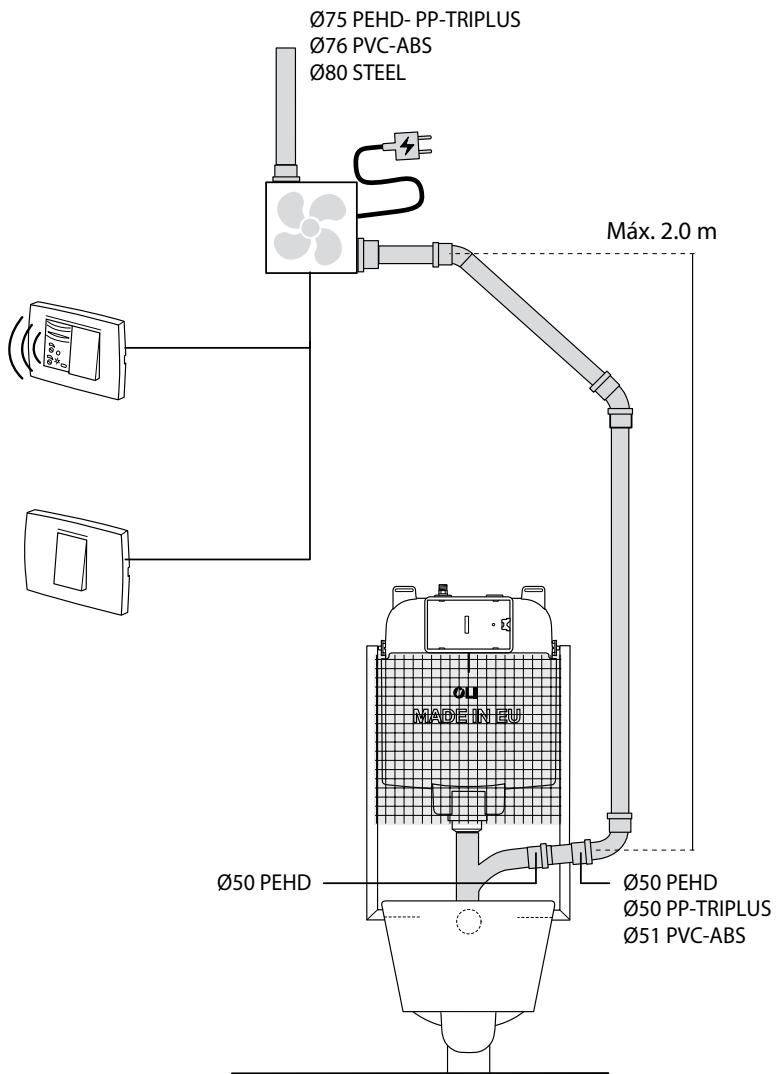


Compatibility

Wide range of control plates


AC



MECH.

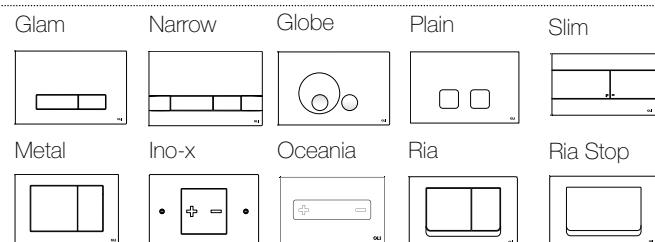

PNEUM.






A fresh solution for air renewal in rooms without windows. High power extractor allows foul odours to be extracted directly from the WC through the flush pipe and condensation to be extracted through an elegant and discreet plate. In combination with the OLI74 Plus flush cistern, the Happy Air system meets the strictest European standards. Installation of Happy Air is extremely simple because it is connected directly to the OLI74 Plus flush cistern and there are no restrictions in its positioning.

OLI74 PLUS HAPPY AIR

Direct

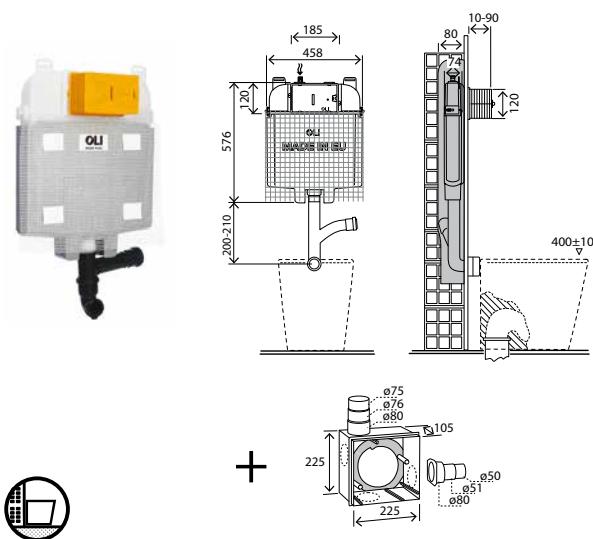

- Compatible with all floor mounted WC pans.


Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

CÓD	DESCRIPTION
101775	OLI74 PLUS Mechanic HAPPY AIR
101772	HAPPY AIR FAN

OLI74 PLUS HAPPY AIR

Simflex

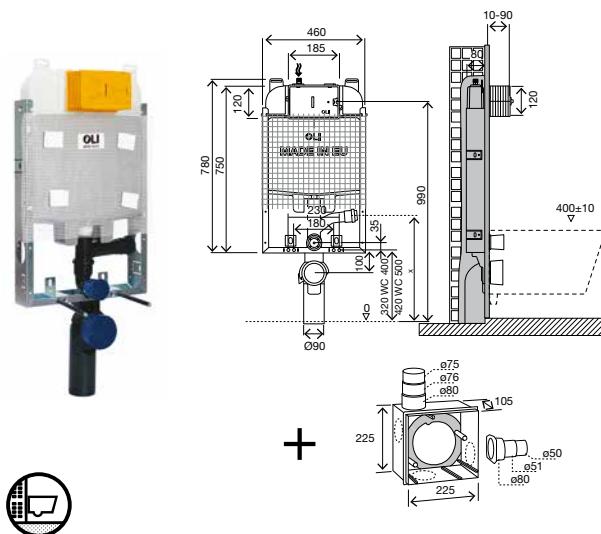

- Compatible with all wall-hung WC pans;
- 80mm thick;
- Built-in wall installation.


Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

CÓD	DESCRIPTION
048591	OLI74 PLUS Mechanic HAPPY AIR Simflex
101772	HAPPY AIR FAN

OLI74 PLUS HAPPY AIR

Sanitarblock

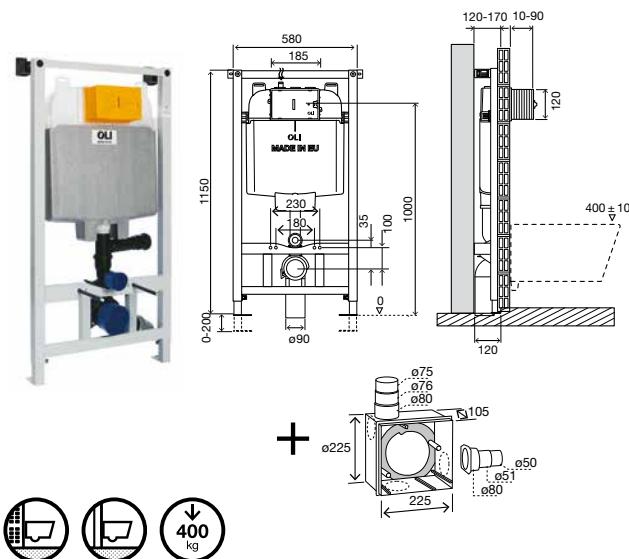

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 90mm minimum thick.


CÓD DESCRIPTION

048590 OLI74 PLUS Mechanic HAPPY AIR Sanitarblock

101772 HAPPY AIR FAN

OLI74 PLUS HAPPY AIR

Free standing

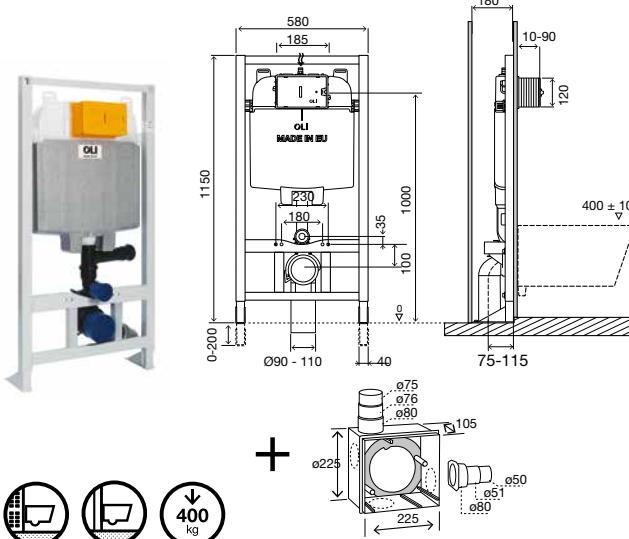

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

CÓD DESCRIPTION

101774 OLI74 PLUS Mechanic HAPPY AIR Free-standing Sanitarblock

101772 HAPPY AIR FAN

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

IN-WALL FLUSH CISTERNS



- Silent

All OLI in-wall cisterns are equipped with silent NF class 1 certified inlet valves. Providing fast filling with minimal noise.

- Space reduction and greater hygiene

The use of in-wall cisterns for wall-hung toilets (tested for a 400kg load) contribute to a faster and more effective cleaning of the bathroom and remove architectural barriers caused by traditional floor standing toilets.

- Versatility

OLI offers a wide range of in-wall cisterns, with mechanical, pneumatic, electronic, or no-touch technology actuation.

- Easy water grid connection

Connecting to the water grid is simple and fast, without the need for tools or connection accessories. The shut off valve is located inside the cistern and opening and closing the valve can be easily done without any tools.

- Easy maintenance

Via the control plate the interior of the in-wall cisterns, can be rapidly accessed and all components can be easily removed for maintenance.

DIRECT

Solid Wall - brick lined



SIMFLEX / BLOCK

Solid Wall - brick lined



SANITARBLOCK



Drywall



SANITARBLOCK

FREE-STANDING

Drywall



IN-WALL INSTALLATION SYSTEMS


DIRECT

This wall installation system should be selected when installing the cistern in a solid wall that will be brick-lined with a **floor-standing toilet**.



SIMFLEX / BLOCK

This wall installation system should be selected when installing the cistern in a solid wall that will be brick lined with a **wall-hung toilet**.



SANITARBLOCK




The Sanitarblock installation system can be used in drywall applications as well as solid wall applications. The main advantage of the system is the ease and speed of safely installing a cistern with a **wall-hung toilet**. The Sanitarblock system is equipped with a Fast Fit system for fixing the frame to the load bearing walls. In compliance with French Standard NF XP-D12 208 (400 kg).


FREE STANDING SANITARBLOCK




The Sanitarblock free-standing installation system is used in drywall applications with a **wall-hung toilet**. The main advantage of the system is the ease and speed of safely installing a concealed cistern with a wallhung toilet without the need of any type of wall. The feet of the Sanitarblock Free-standing system are designed so that the structure offers good resistance when only secured to the floor; load resistance is guaranteed in compliance with the French Standard NF XPD12 208 (400 kg).




- 126mm thick (OLI120 PLUS, OLI120)
- 80mm thick (OLI74 PLUS, OLI80)
- 150mm thick (EXPERT PLUS)
- 187mm thick (QUADRA PLUS)

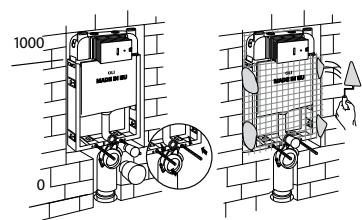

- 128mm thick (OLI120 PLUS, OLI120)
- 80mm thick (OLI74 PLUS, OLI80)
- 144mm thick (OLI120 PLUS Block)
- 150mm thick (EXPERT PLUS)

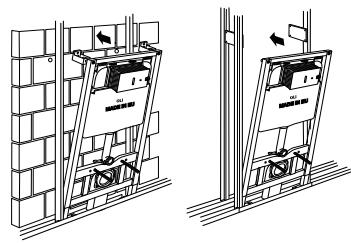

- 126mm thick (OLI120 PLUS, OLI120)
- 120mm thick (OLI74 PLUS, OLI80)
- 90mm thick (OLI74 PLUS S90)
- 150mm thick (EXPERT PLUS)
- 190mm thick (QUADRA PLUS)

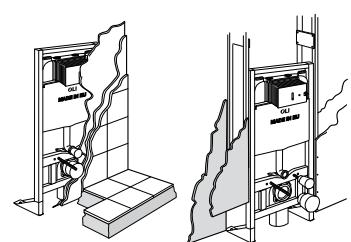


- 180mm thick (OLI74 PLUS, OLI80, OLI120 PLUS, EXPERT PLUS)
- 240mm thick (OLI74 PLUS Free Standing Double)
- 187mm thick (QUADRA PLUS)

OLI120 PLUS

Total Access

- Easier maintenance due to a transparent protection plate with incorporated levers;
- Removable stop valve.

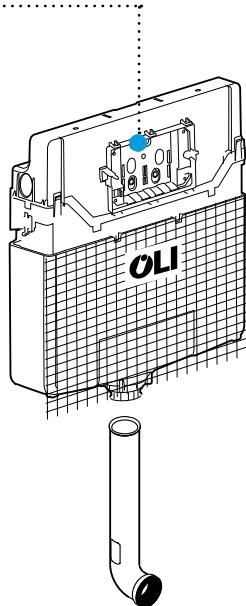

OLI_{pure}[®]

- Universal:

Compatible with existing liquid disinfectants WC on the market.

- Long lasting:












Storage capacity of 450ml.

Hydroboost |

- Self-Sustainable system;
- Uses the energy of water in motion to generate power for capacitive sensor actuation;
- No need to connect to power grid or to replace batteries.
- Capacitive sensors actuation;
- Simple installation;
- Less maintenance required;
- Plug and Play;
- Power grid connection.

Compatibility

Wide range of control plates

Hydroboost 	MOON	Glossy	Tribe	
				
MECH.	Glam	Narrow	Globe	
				
PNEUM.	Plain	Slim	Metal Dual	
				
ELECTR.	Blink	Trumpet	Oceania	Easy Dual
				
SM15	Trend	Karisma		
				
Electra I	Electra II	Electra III		
				

Azor Plus Inlet Valve



SAVES UP TO **9L**
OF WATER PER DAY

- Exclusive Water Saving inlet valve, due to the Delayed Refill System;
- Silent – Class 1 NF certified.

Outlet Valve


- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2, 6/3 or 7/3 litres;
- Silicone seal.

With all the best OLI technology integrated, allows not only an easy and fast installation, as well as a perfect maintenance.



OLI120 PLUS

Direct

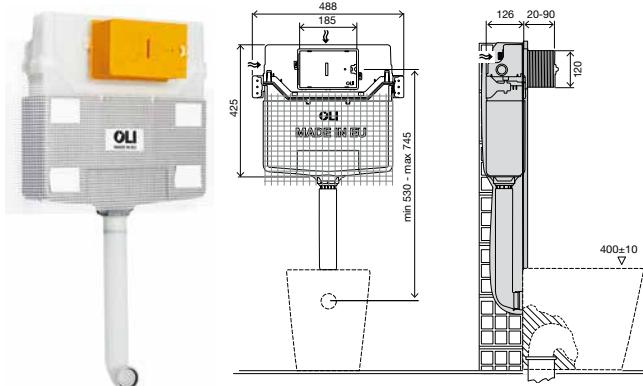


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 or 7/3 litres);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Delayed refilling - Azor plus inlet valve;
- Silent valve class 1 NF certified;
- Mechanical, Pneumatic, Electronic, Hydroboost and AC version available;
- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);
- 126mm thick;
- Supplied with anti-condensation lining;
- Other versions compliant with: WRAS/NF/KIWA/BELGAQUA standards;
- EN 14055 CL1;
- 10 year warranty;
- Compatible with all floor mounted WC pans.



CÓD	DESCRIPTION
099941	OLI120 PLUS Mechanic
152970	OLI120 PLUS Mechanic OLIpure
153964	OLI 120 PLUS Pneumatic
154075	OLI 120 PLUS Electronic
878843	OLI120 PLUS cap Hydroboost
878619	OLI120 PLUS cap AC <small>NEW</small>

OLI120 PLUS

Simflex

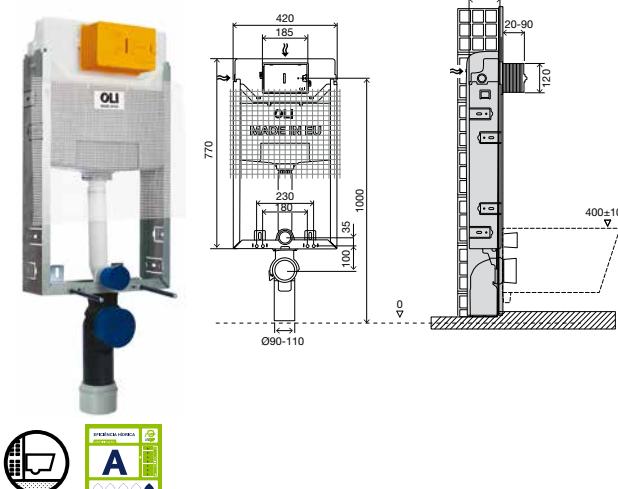

- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);
- Compatible with all wall-hung WC pans;
- 128mm thick;
- Built-in wall installation.


CÓD	DESCRIPTION
099946	OLI120 PLUS Mechanic Simflex
152971	OLI 120 PLUS Mechanic OLIpure Simflex
154078	OLI 120 PLUS Pneumatic Simflex
154079	OLI 120 PLUS Electronic Simflex
878844	OLI120 PLUS cap Hydroboost Simflex
878620	OLI120 PLUS cap AC Simflex <small>NEW</small>

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI120 PLUS

Block

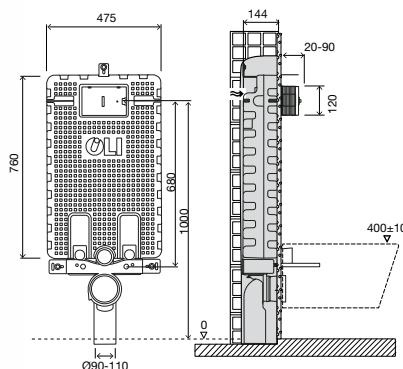


CÓD DESCRIPTION

151339	OLI120 PLUS Mechanic Block
153798	OLI120 PLUS Mechanic OLIpure Block
154076	OLI120 PLUS Pneumatic Block
154077	OLI120 PLUS Electronic Block
878845	OLI120 PLUS cap Hydroboost Block
878623	OLI120 PLUS cap AC Block <small>(NEW)</small>

OLI120 PLUS

Sanitarblock

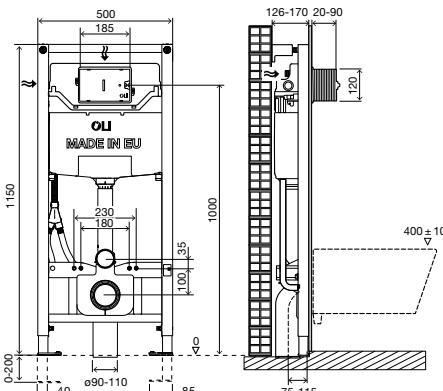

CÓD DESCRIPTION

099949	OLI120 PLUS Mechanic Sanitarblock
152972	OLI120 PLUS Mechanic OLIpure Sanitarblock
135980	OLI120 PLUS Mechanic Sanitarblock SHT *
177306	OLI120 PLUS Pneumatic Sanitarblock
177305	OLI120 PLUS Electronic Sanitarblock
878846	OLI120 PLUS cap Hydroboost Sanitarblock
878621	OLI120 PLUS cap AC Sanitarblock <small>(NEW)</small>

- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);

- Compatible with all wall-hung WC pans;

- 144mm thick;

- Built-in wall installation

Robust EPS block that completely encloses the cistern and allows for faster installation.

Included

- WC pan fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);

- Compatible with all wall-hung WC pans;

- Built-in or plasterboard wall installation;

- Frame tested for a 400kg load;

- Depth adjustable outlet bend;

- Easy and quick installation with fast fit system; Height adjustable from 0 to 200mm.


Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

* Prepared for shower toilet installation. See kit's available pag.116

OLI120 PLUS

Free Standing Sanitarblock

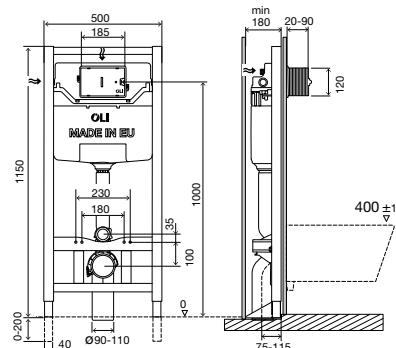


CÓD DESCRIPTION

099952	OLI120 PLUS Mechanic Free-standing
152973	OLI120 PLUS Mechanic OLIpure Free-standing
099951	OLI120 PLUS Pneumatic Free-standing Sanitarblock
099943	OLI120 PLUS Electronic Free-standing Sanitarblock
878847	OLI120 PLUS cap Hydroboost Free-standing
878622	OLI120 PLUS cap AC Free-standing <small>(NEW)</small>

OLI120 PLUS

Height Adjustable Sanitarblock

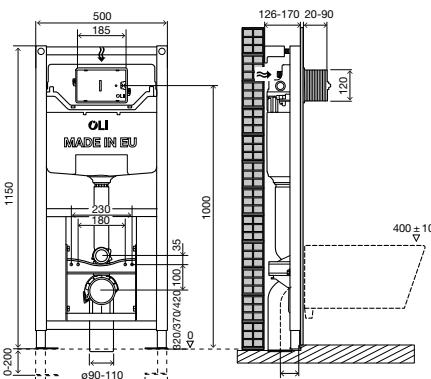

CÓD DESCRIPTION

154083	OLI 120 PLUS Mechanic height adjustable Sanitarblock
--------	--

- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);
- Compatible with all wall-hung WC pans;
- For plasterboard wall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);
- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Allows the height adjustment of the WC pan fixation in three different positions before closed the wall;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm.

Included


- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



OLI120

Total Access

- Easier maintenance due to a transparent protection plate with incorporated levers;
- Removable stop valve.

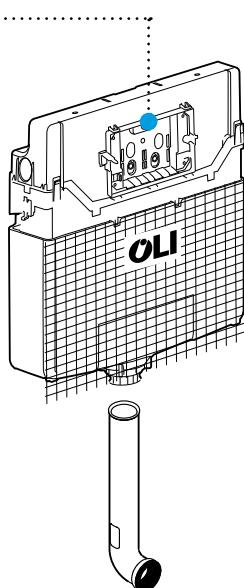

Inlet Valve


- Silent – Class 1 NF certified;
- Piston inlet valve.

Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2, 6/3 or 7/3 litres;
- Silicone seal.

Compatibility

Wide range of control plates

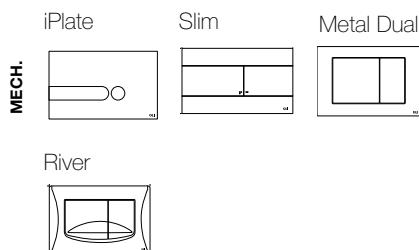




OLI has the solutions
for wall-hung and
floor-standing toilets

For any type of bathroom, OLI120 has the solution. Giving your bathroom a new look couldn't be easier.

OLI120

Direct

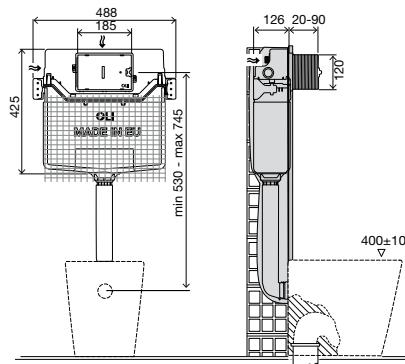

CÓD DESCRIPTION

097945 OLI120 Mechanic


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 - 7/3 litres);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Piston inlet valve;
- Silente inlet valve class 1 NF certified;
- Mechanical actuation;
- 126mm thick;
- Supplied with anti-condensation lining;
- EN 14055 CL1;
- 10 year warranty;
- Compatible with all floor mounted WC pans.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G ½" stop valve;
- WC connection pipe Ø45.

OLI120

Simflex

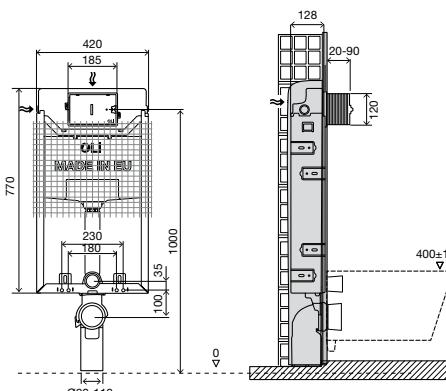

- Compatible with all wall-hung WC pans;
- 128mm thick;
- Built-in wall installation.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

097946 OLI120 Mechanic Simflex

OLI120

Sanitarblock

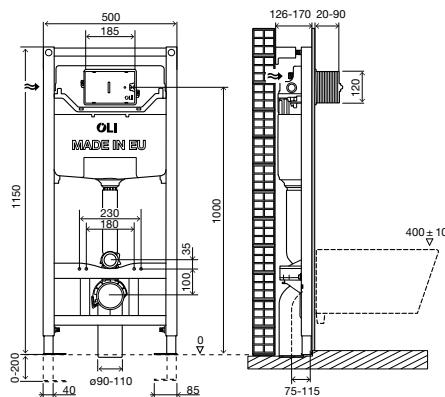

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

097947 OLI120 Mechanic Sanitarblock




OLI74 PLUS

80mm THICKNESS

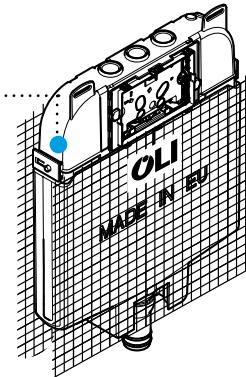

OLI74Plus with 2 inlet valves allows the connection to a second water source, like a rain water tank. It is an additional water efficiency solution which also reduces the water bill.




OLIpure®

- **Universal:**

Compatible with existing liquid disinfectants WC on the market.

- **Long lasting:**

Storage capacity of 450ml.



Hydroboost




- Self-Sustainable system;
- Uses the energy of water in motion to generate power for capacitive sensor actuation;
- No need to connect to power grid or to replace batteries.
- Capacitive sensors actuation;
- Simple installation;
- Least maintenance required;
- Plug and Play;
- Power grid connection.

Compatibility

Wide range of control plates

Hydroboost



MECH.	Glam	Narrow	Globe	Plain	Ria Stop
SLIM	Slim	Metal	Ino-x	Oceania	Ria
PNEUM.	Blink	Trumpet	Oceania	Easy Dual	
ELECTR.	SM15	Trend	Salina		
	Electra I	Electra II	Electra III		



SAVES UP TO **9L**
OF WATER PER DAY

- Exclusive Water Saving inlet valve, due to the Delayed Refill System;
- Silent – Class 1 NF certified.

Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4.5/3 litres;
- Silicone seal.




OLI74 Plus is the versatile solution

OLI74 Plus is suitable for any type of installation and compatible with all OLI control plates.

OLI74 PLUS

Direct

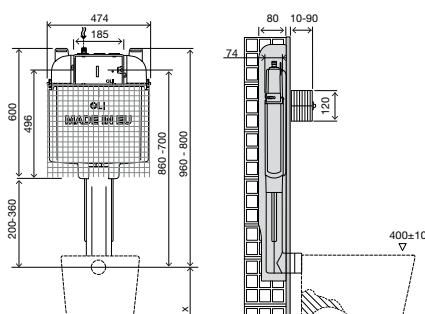

CÓD

DESCRIPTION

601601	OLI74 PLUS Mechanic
877961	OLI74 PLUS Mechanic 2 inlet valve <small>(NEW)</small>
152976	OLI74 PLUS Mechanic OLIpure
601602	OLI74 PLUS Pneumatic
077715	OLI74 PLUS Electronic
878838	OLI74 PLUS cap Hydroboost
878624	OLI74 PLUS cap AC <small>(NEW)</small>


- Dual flush 6/3 litre in-wall cistern (adjustable to 4.5/3 litres);
- 5/3 litres flush version upon request (Class A+);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Delayed refilling - Azor plus inlet valve;
- Silent inlet valve class 1 NF certified;
- Mechanical, Pneumatic, Electronic, Hydroboost and AC version available;
- Pneumatic, electronic, Hydroboost and AC kits available (see Page 114);
- 80mm total thickness;
- Supplied with anti-condensation lining;
- Other versions compliant with: WRAS/NF/SAI-WATERMARK/UPC/KIWA;
- EN 14055 CL1;
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements;
- 10 year warranty.
- Compatible with all floor mounted WC pans.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G ½" stop valve;
- WC connection pipe Ø45 .

OLI74 PLUS

Simflex

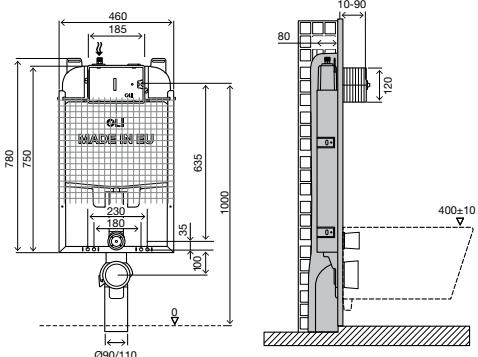

- Compatible with all wall-hung WC pans;
- 80mm thick;
- Built-in wall installation.

Included

- Net for easier mortar adhesion;
- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.


CÓD

DESCRIPTION

601901	OLI74 PLUS Mechanic Simflex
878929	OLI74 PLUS Mechanic Simflex 2 inlet valve <small>(NEW)</small>
152977	OLI74 PLUS Mechanic OLIpure Simflex
002332	OLI74 PLUS Pneumatic Simflex
077736	OLI74 PLUS Electronic Simflex
878839	OLI74 PLUS cap Hydroboost Simflex
878625	OLI74 PLUS cap AC Simflex

OLI74 PLUS

S90 Sanitarblock

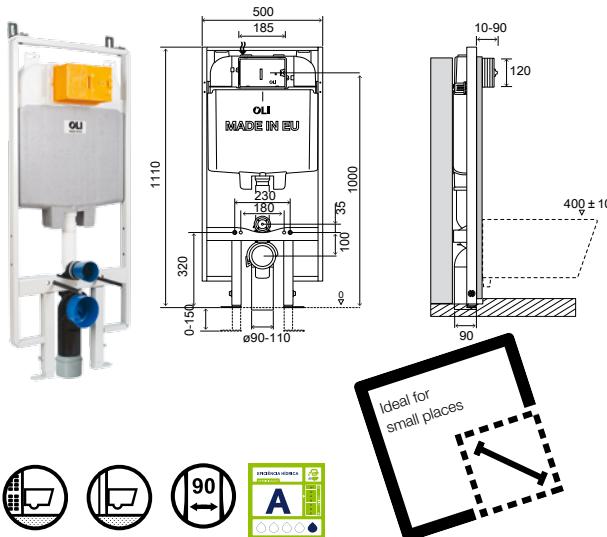

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- 90mm minimum thick.

Included


- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

CÓD DESCRIPTION

601803	OLI74 PLUS Mechanic S90 Sanitarblock
187648	OLI74 PLUS Mechanic OLIpure S90 Sanitarblock
187649	OLI74 PLUS Pneumatic S90 Sanitarblock
187650	OLI74 PLUS Electronic S90 Sanitarblock
878840	OLI74 PLUS cap Hydroboost S90 Sanitarblock
878655	OLI74 PLUS cap AC S90 Sanitarblock <small>(NEW)</small>

OLI74 PLUS

Sanitarblock

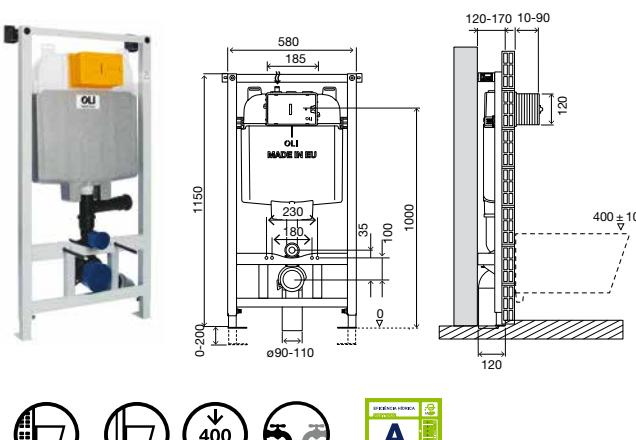

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm.

Included


- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

CÓD DESCRIPTION

601801	OLI74 PLUS Mechanic Sanitarblock
879085	OLI74 PLUS Mechanic Sanitarblock 2 inlet valve <small>(NEW)</small>
152978	OLI74 PLUS Mechanic OLIpure Sanitarblock
002333	OLI74 PLUS Pneumatic Sanitarblock
077746	OLI74 PLUS Electronic Sanitarblock
878841	OLI74 PLUS cap Hydroboost Sanitarblock
878626	OLI74 PLUS cap AC Sanitarblock <small>(NEW)</small>

OLI74 PLUS


Free Standing Sanitarblock

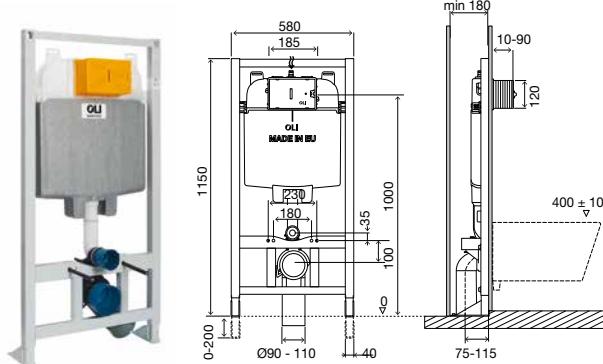

CÓD	DESCRIPTION
601824	OLI74 PLUS Mechanic Free-standing
879089	OLI74 PLUS Mechanic Free-standing 2 inlet valve <small>(NEW)</small>
152979	OLI74 PLUS Mechanic OLIpure Free-standing
002488	OLI74 PLUS Pneumatic Free-standing
077752	OLI74 PLUS Electronic Free-standing
878842	OLI74 PLUS cap Hydroboost Free-standing
878627	OLI74 PLUS cap AC Free-standing <small>(NEW)</small>

OLI74 PLUS

Free Standing Double

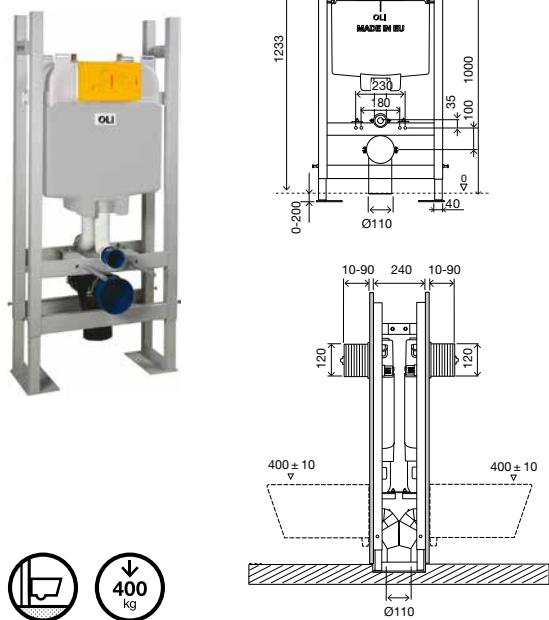

CÓD	DESCRIPTION
600859	OLI74 PLUS Mechanic Free-standing double

- Compatible with all wall-hung WC pans;
- For plasterboard wall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm.


Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



OLI80

80mm THICKNESS

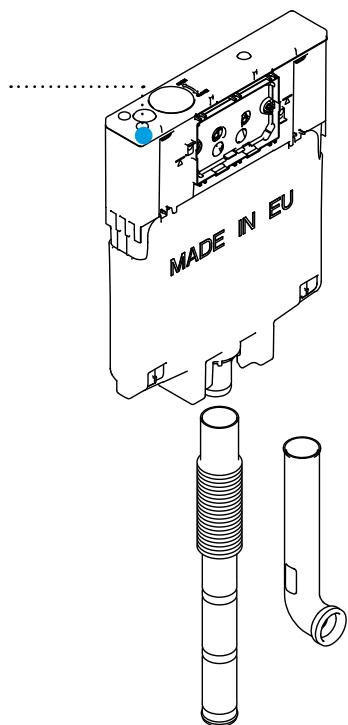

Inlet Valve

- Silent – Class 1 NF certified.





Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4.5/3 litres;
- Silicone seal.

Compatibility

Wide range of control plates

MECH.




Concealed cisterns
allow for easy
cleaning of your
bathroom.



OLI80

Direct

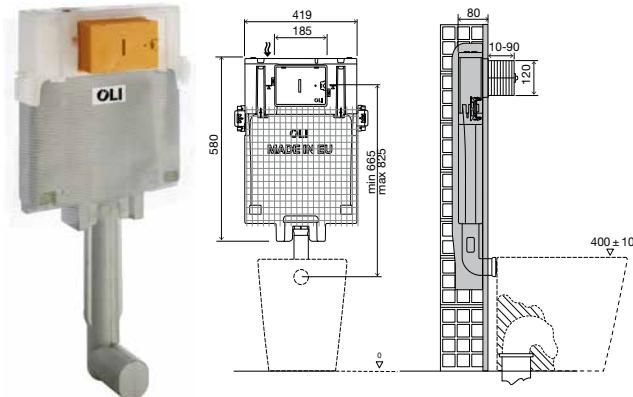

- Dual flush 6/3 litre in-wall cistern (adjustable to 4.5/3 litres);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Silent inlet valve class 2;
- Mechanical actuation;
- 80 mm total thickness;
- Supplied with anti-condensation lining;
- Other versions compliant with: DIN/BELGAQUA standards;
- EN 14055 CL1;
- 10 year warranty;
- Compatible with all floor mounted WC pans.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G ½" stop valve;
- WC connection pipe Ø45 .




CÓD	DESCRIPTION
-----	-------------

600051 OLI80 Mechanic

OLI80

Squat pan

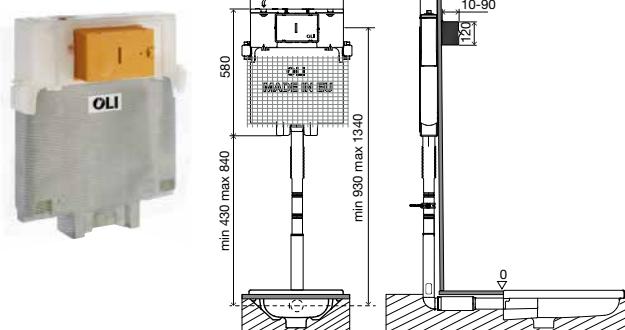

- Compatible with all WC pan at floor level or floor mounted;
- 80mm thick;
- Built-in wall installation.

Included

- Wall fixing kit;
- Articulated pipe 50;
- Articulated pipe clamp;
- WC connection pipe 45;
- Net for easier mortar adhesion;
- G ½" stop valve.




CÓD	DESCRIPTION
-----	-------------

045058 OLI80 Mechanic squat pan

OLI80

Simflex

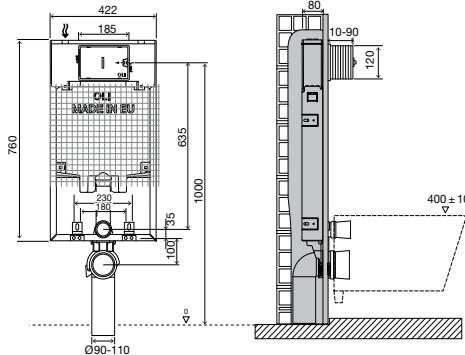

- Compatible with all wall-hung WC pans;
- 80mm thick;
- Built-in wall installation

Included

- Net for easier mortar adhesion;
- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½ " stop valve.




CÓD DESCRIPTION

600251 OLI80 Mechanic Simflex

OLI80

Sanitarblock

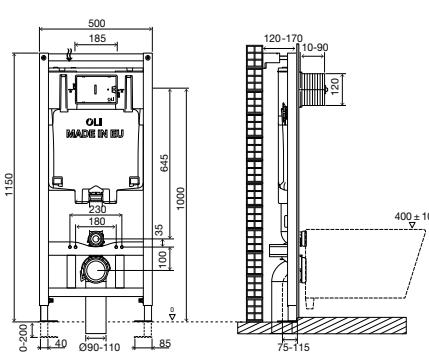

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor
- G ½ " stop valve.




CÓD DESCRIPTION

600151 OLI80 Mechanic Sanitarblock

EXPERT PLUS

150mm THICKNESS

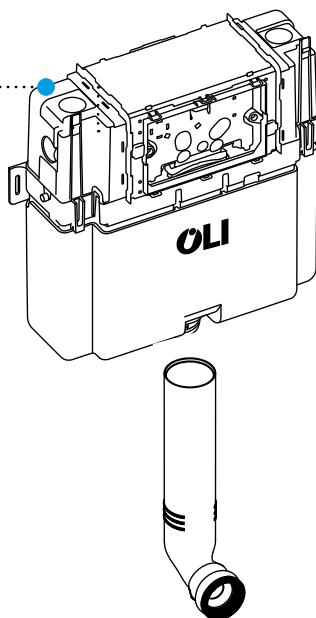

EXPERT PLUS IS THE IDEAL CISTERN FOR LOWER APPLICATIONS



OLI^{pure}®

- **Universal:**

Compatible with existing liquid disinfectants WC on the market.


- **Long lasting:**

Storage capacity of 450ml.

Azor Plus Inlet Valve



SAVES UP TO **9L**
OF WATER PER DAY



- Exclusive Water Saving inlet valve, due to the Delayed Refill System;
- Silent – Class 1 NF certified.

Compatibility


Wide range of control plates

MECH.	Glam*	Narrow*	Globe*
	Plain*	Slim	Metal Dual

PNEUM.	Blink	Trumpet	Oceania	Easy Dual
	SM15	Trend	Karisma	


Expert Plus offers top or frontal window

Expert Plus is the ideal solution for lower installation.

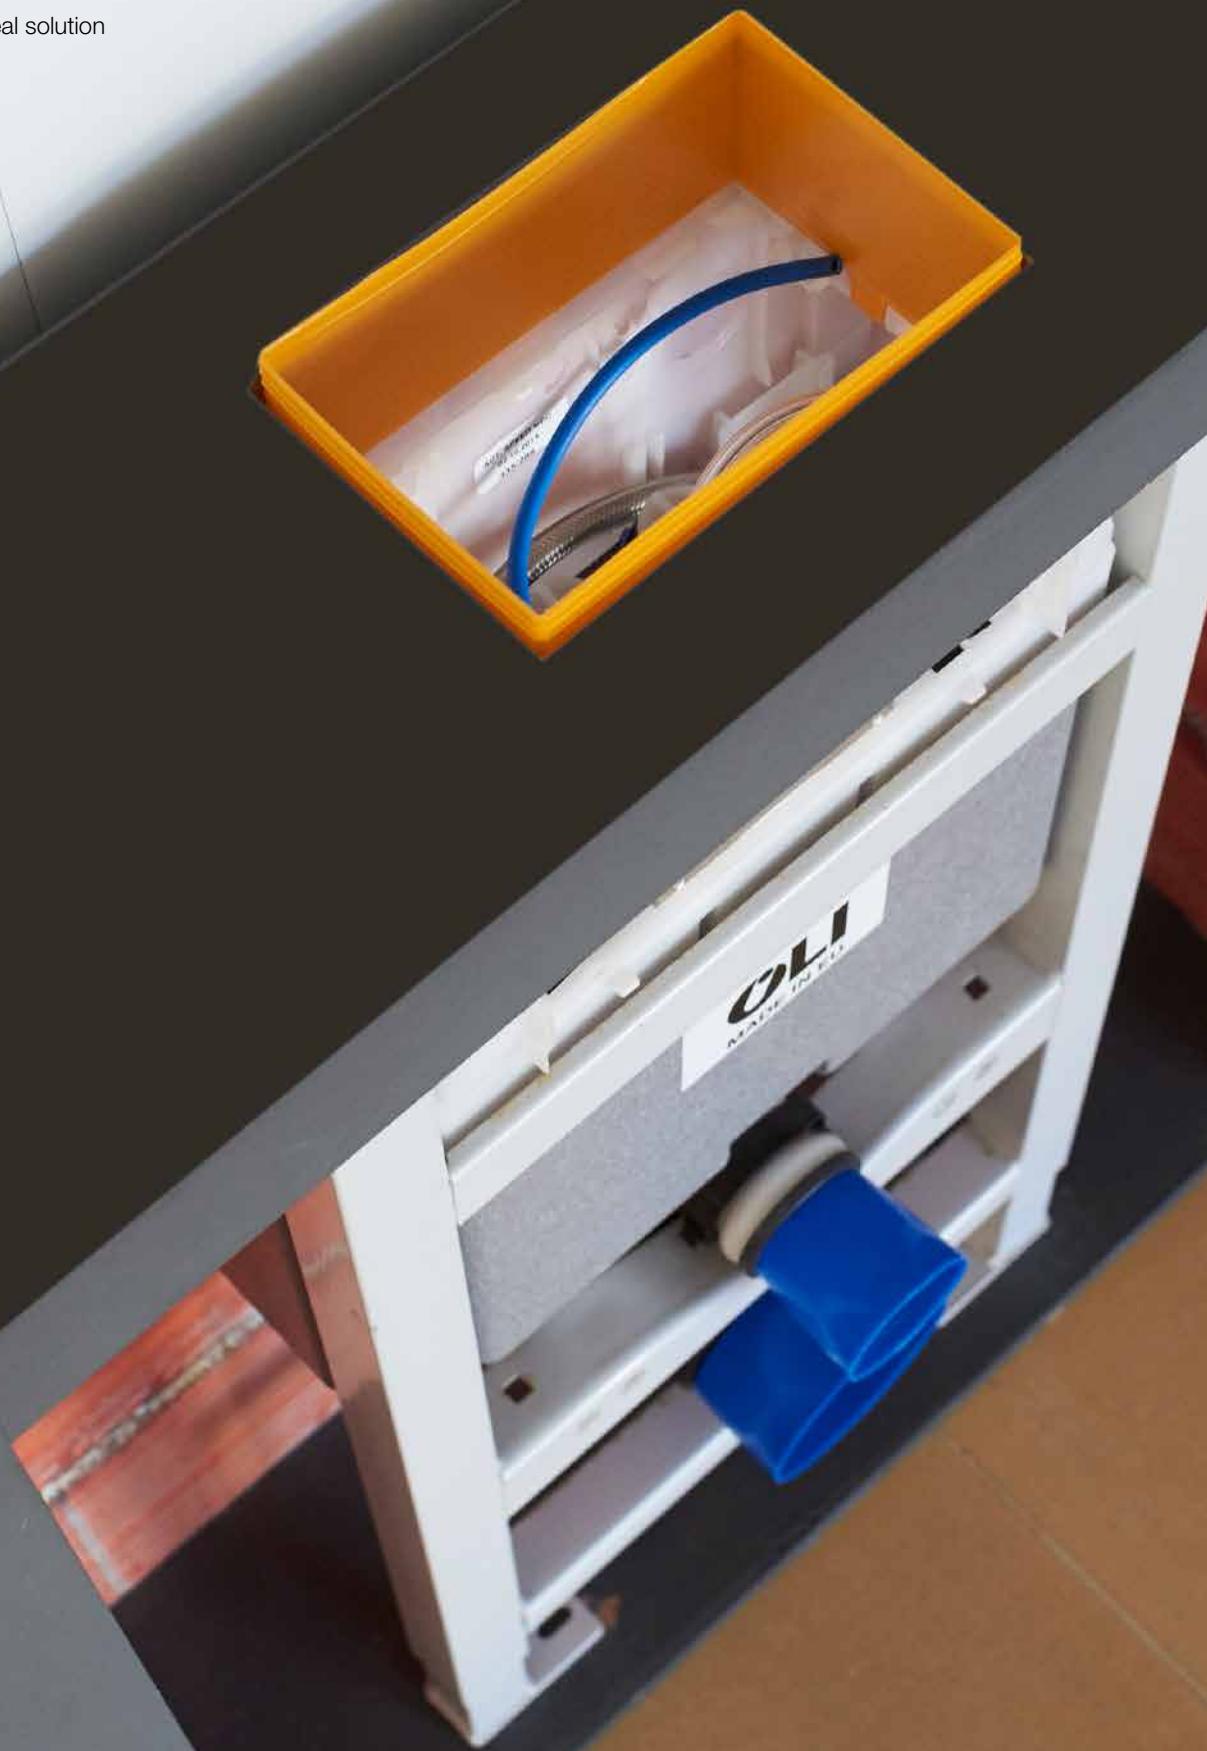

EXPERT PLUS

Direct

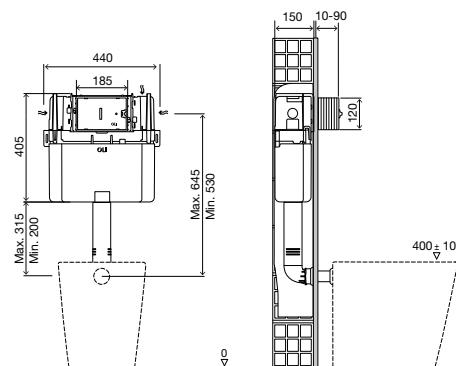

CÓD DESCRIPTION

721003 EXPERT PLUS Mechanic

152966 EXPERT PLUS Mechanic OLIpure

721005 EXPERT PLUS Pneumatic


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 or 7/3 litres);
- Pre-set version 4/2 (CL1) or 4/2,6 (CL2) litres available on request;
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Delayed refilling - Azor plus inlet valve;
- Silent inlet valve class 1 NF certified;
- 150mm thick;
- Top or front activation/access;
- Mechanic and pneumatic actuation;
- Lower/under bench installation possibility;
- Other versions compliant with: WRAS/ SAI-WATERMARK/SINTEF/NF/BELGAQUA standards;
- EN 14055 CL1;
- Class "A" Water Efficiency in compliance with the ANQIP Authority requirements;
- Supplied with anti-condensation lining;
- 10 year warranty;
- Compatible with all floor mounted WC pans.

Included

- 315 mm flush pipe;
- G ½" stop valve;
- WC connection pipe Ø45.

EXPERT PLUS

Simflex 820

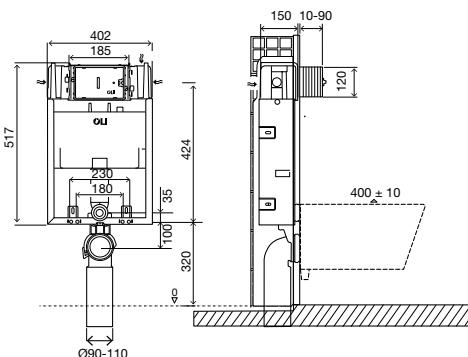

CÓD DESCRIPTION

076456 EXPERT PLUS Mechanic Simflex 820

152967 EXPERT PLUS Mechanic OLIpure Simflex 820

141960 EXPERT PLUS Pneumatic Simflex 820


- Compatible with all wall-hung WC pans;
- Built-in wall installation;
- Lower/under bench installation.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

EXPERT PLUS

Sanitarblock 820

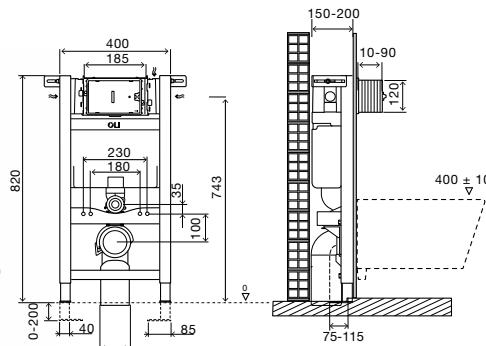

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



CÓD DESCRIPTION


721703 EXPERT PLUS Mechanic Sanitarblock 820

152968 EXPERT PLUS Mechanic OLIpure Sanitarblock 820

141961 EXPERT PLUS Pneumatic Sanitarblock 820

EXPERT PLUS

Free Standing Sanitarblock 820

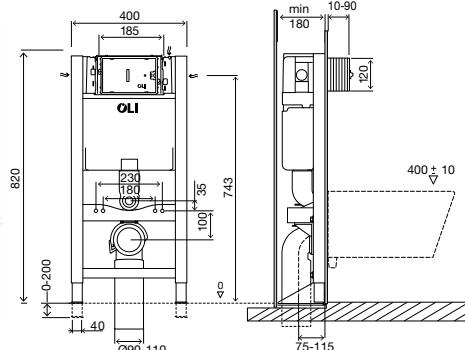

- Compatible with all wall-hung WC pans;
- For plasterboard wall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



CÓD DESCRIPTION

014092 EXPERT PLUS Mechanic Free-standing 820


152969 EXPERT PLUS OLIpure Free-standing 820

048375 EXPERT PLUS Pneumatic Free-standing 820

EXPERT PLUS


1130

Height 1130

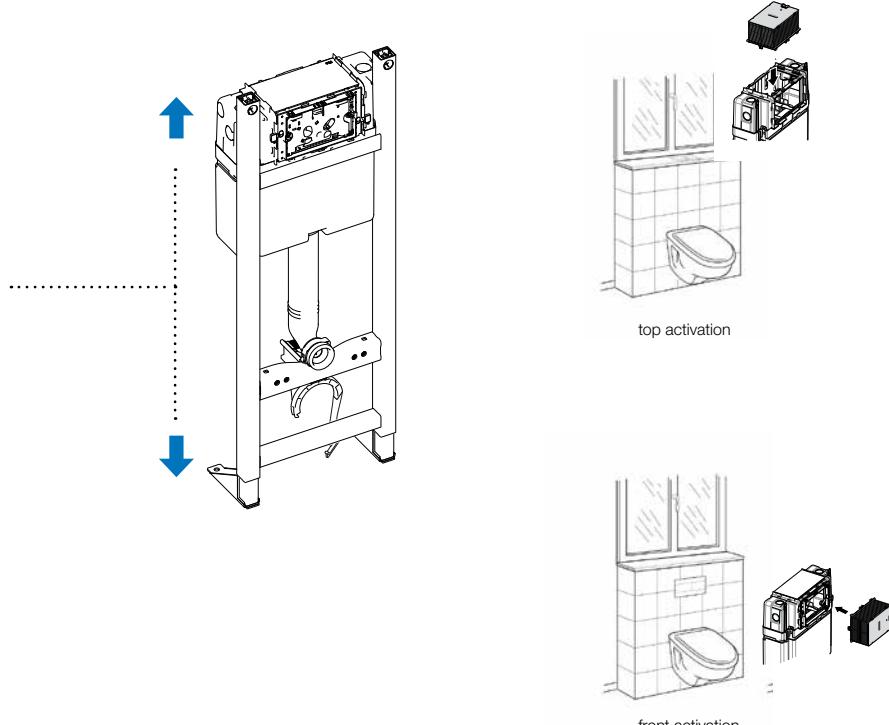

EXPERT PLUS

Simflex 1130

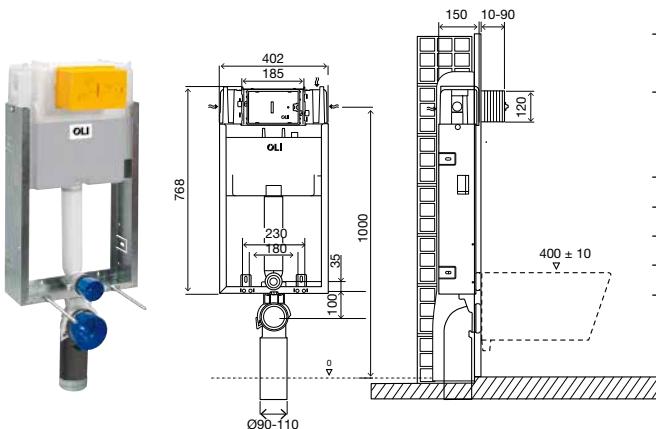

- Compatible with all wall-hung WC pans;
- Built-in wall installation.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

014095 EXPERT PLUS Mechanic Simflex 1130

EXPERT PLUS

Sanitarblock 1130

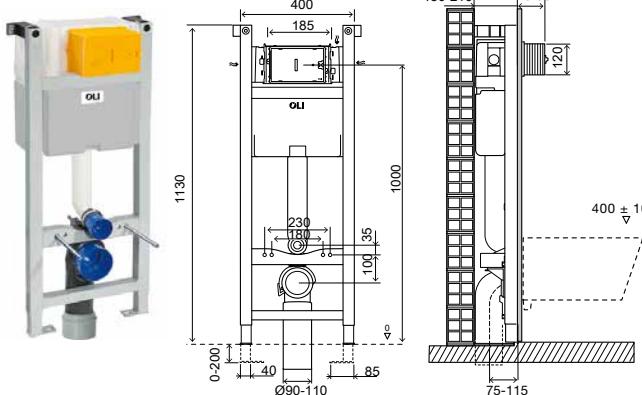

- Compatible with all wall-hung WC pans;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Optional corner kit (see Page 121).

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

721803 EXPERT PLUS Mechanic Sanitarblock 1130

EXPERT PLUS

Free Standing Sanitarblock 1130

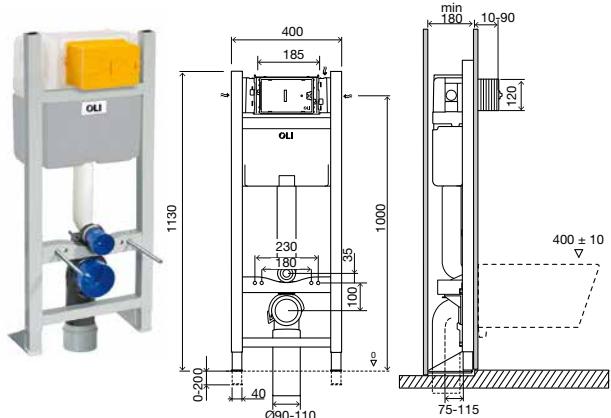

- Compatible with all wall-hung WC pans;
- For plasterboard wall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

014091 EXPERT PLUS Mechanic Free-standing 1130

QUADRA PLUS

187mm THICKNESS

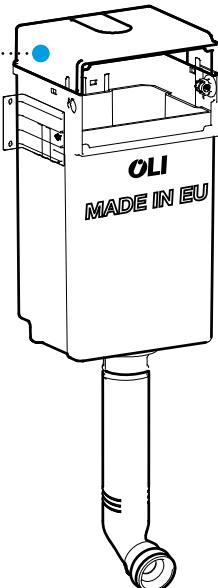

Azor Plus Inlet Valve



SAVES UP TO 9L
OF WATER PER DAY


- Exclusive Water Saving inlet valve, due to the Delayed Refill System;
- Silent – Class 1 NF certified.

Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- EPDM seal.

Compatibility

Wide range of control plates

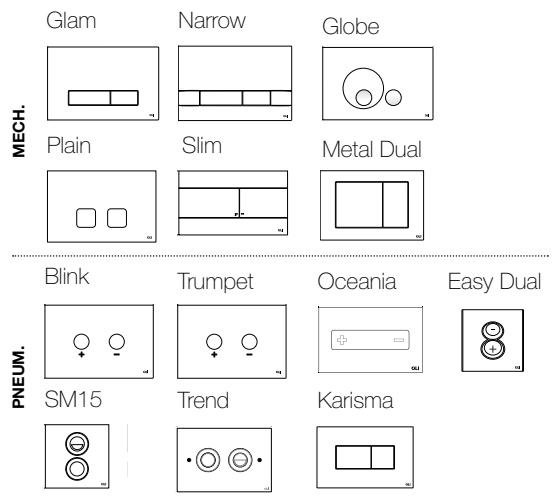


A photograph of a compact white toilet in a small, modern bathroom. The toilet is positioned in a narrow space between two light-colored walls. To the left of the toilet is a silver toilet paper holder mounted on the wall. To the right is a silver toilet brush holder. Above the toilet, on the wall, is a rectangular flush panel with two buttons. The floor is a light-colored, textured material.

Small in size, Quadra
Plus fits practically
anywhere.

QUADRA PLUS

Direct

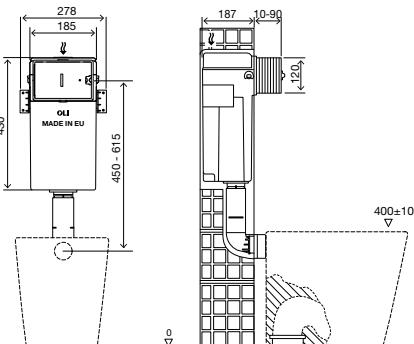

- Dual flush 6/3 litre in-wall cistern;
- Delayed refilling - Azor plus inlet valve;
- Compatible with Pneumatic buttons - available kit (see Page 118);
- 187 mm thick;
- 270 mm reduced width;
- Top access for maintenance;
- EN 14055 CL1;
- Other versions compliant with: NF Standard;
- Supplied with internal anti-condensation lining;
- 10 year warranty.
- Compatible with all floor mounted WC pans.

Included

- 315mm flush pipe;
- G ½" stop valve;
- WC connection pipe Ø45 .


CÓD DESCRIPTION

720002 QUADRA PLUS Mechanic

037172 QUADRA PLUS Pneumatic

QUADRA PLUS

Sanitarblock

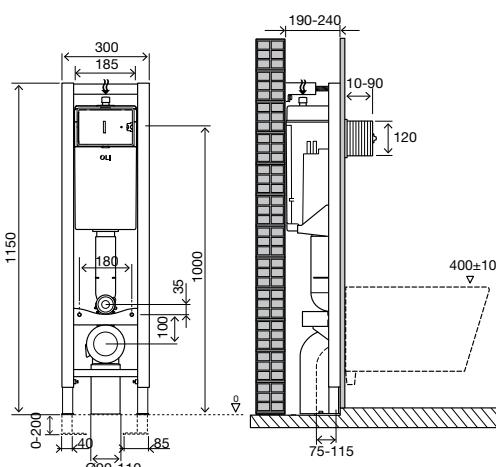

- Compatible with wall-hung WC pans with a 180mm fixation length;
- Built-in or plasterboard wall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with Fast-Fit system;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- Optional corner kit (see Page 121).

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CÓD DESCRIPTION

135974 QUADRA PLUS Mechanic Sanitarblock

141945 QUADRA PLUS Pneumatic Sanitarblock

QUADRA PLUS

Free Standing Sanitarblock

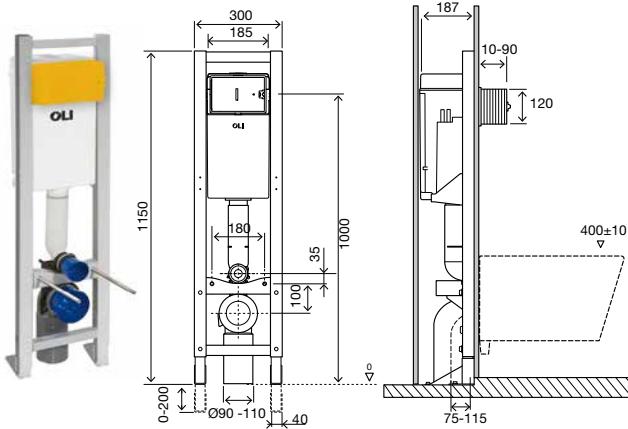

- Compatible with wall-hung WC pans with a 180mm fixation length;
- Plasterboard wall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



CÓD DESCRIPTION

722021 QUADRA PLUS Mechanic Free-standing

187103 QUADRA PLUS Pneumatic Free-standing



FRAMES





URINAL

For wall hung urinals
Easy and quick installation.



WC

For floor-standing or wall-hung toilets, OLI
WC solutions will last a lifetime.



BIDET

With simple lines, the wall-hung bidet
integrates naturally with the bathroom
environment. OLI frame solutions are
universal and contribute to space saving in
the bathroom.




WASHBASIN

In its range of products, OLI provides wall-
hung lavatory frames.



WC

Sanitarblock

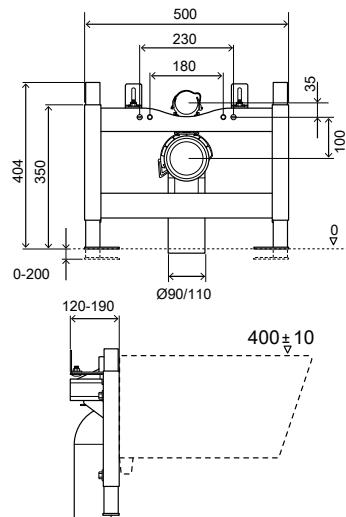

CÓD DESCRIPTION

714001 WC Sanitarblock


- Compatible with all wall-hung WC pans;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC pan fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.

WC

Free Standing

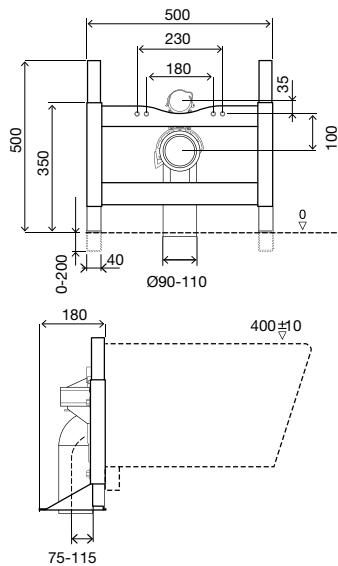

CÓD DESCRIPTION

616042 WC Free-standing


- Compatible with all wall-hung WC pans;
- For plasterboard wall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor.

4 WC FIXATION POINTS

Sanitarblock

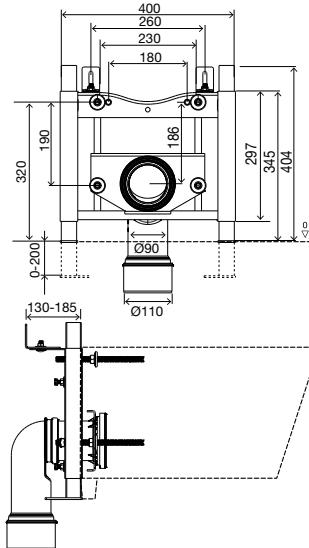

CÓD DESCRIPTION

877930 4 WC Fixation Points Sanitarblock - axial connection



- Compatible with all wall-hung WC pans with 4 fixations;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC pan fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.

4 WC FIXATION POINTS

Free Standing

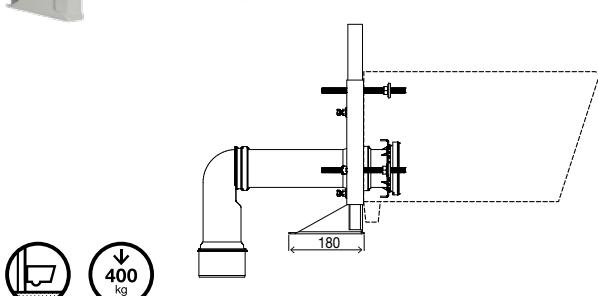

CÓD DESCRIPTION

879027 4 WC Fixation Points Free-standing - axial connection


- Compatible with all wall-hung WC pans with 4 fixations;
- For plasterboard wall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor;
- Horizontal outlet pipe 250mm.

ECO

Simflex

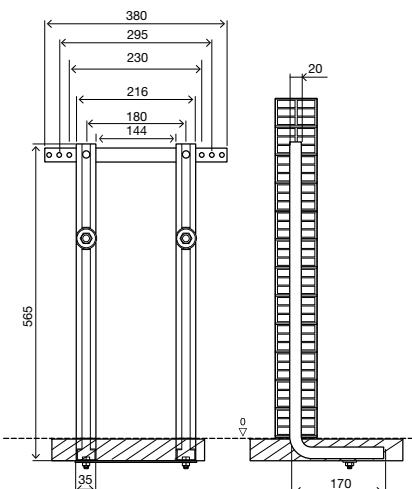

- Frame for wall-hung WC or bidet;
- Built-in wall installation;
- Galvanized frame;
- Adjustable in height;
- 10 year warranty.

Included

- WC pan/Bidet fixing material;
- Frame fixing material.




CÓD DESCRIPTION

618581 ECO Simflex

BIDET

Simflex

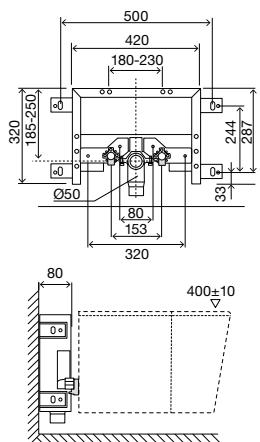

- Frame for wall-hung bidet;
- Built-in wall installation;
- Galvanized frame;
- 80mm thick;
- Adjustable attachment plate;
- 10 year warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40-32/50-40.




CÓD DESCRIPTION

610010 BIDET Simflex

ECO BIDET

Sanitarblock

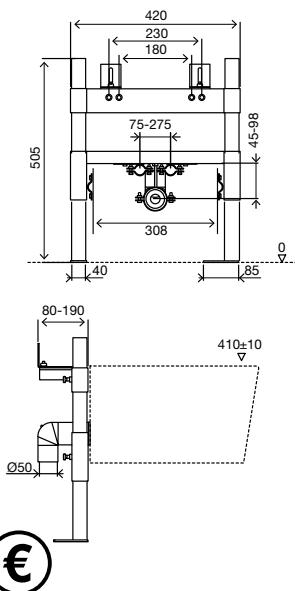

CÓD DESCRIPTION

008908 ECO BIDET Sanitarblock


- Frame for wall-hung bidet;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Adjustable height;
- Adjustable attachment plates;
- 10 year warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40 - 32/50 - 40.

BIDET

Sanitarblock

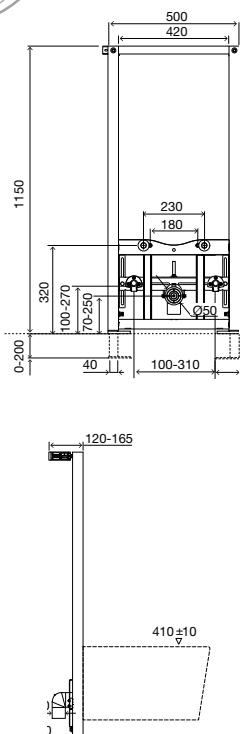

CÓD DESCRIPTION

136078 BIDET Sanitarblock (NEW)


- Frame for wall-hung bidet;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Frame tested for 400kg;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plates;
- 10 years warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø40mm - 32 / 50mm - 40mm;
- Two G ½ fittings for water connection.

WASHBASIN

Simflex

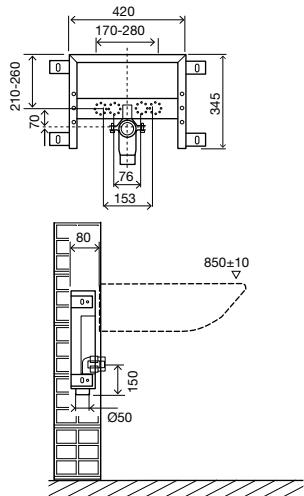

CÓD DESCRIPTION

611011 WASHBASIN Simflex


- Frame for wall-hung washbasin;
- Built-in wall installation;
- Galvanized frame;
- 80 mm thick;
- Adjustable attachment plate;
- 10 year warranty.

Included

- Fixing material;
- Outlet bend Ø 40-32/50-40.

WASHBASIN

Sanitarblock

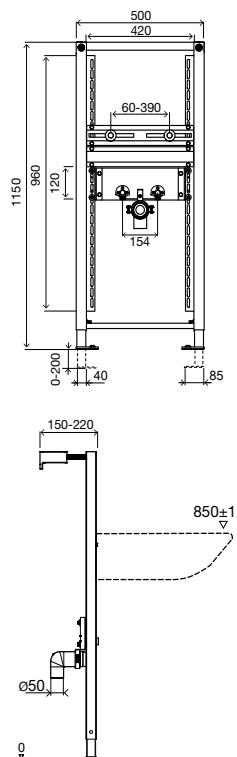

- Frame for wall-hung washbasin;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Frame tested for a 150kg;
- Height adjustable from 0 to 200mm;
- Fully adjustable mounting plates;
- 10 years warranty.

Included



- Washbasin fixing material;
- Frame fixing material;
- Outlet bend Ø40mm - 32 / 50mm - 40mm;
- Two G ½ fittings for water connection.

CÓD DESCRIPTION

136312 WASHBASIN Sanitarblock

EASY STRUCTURE

Sanitarblock

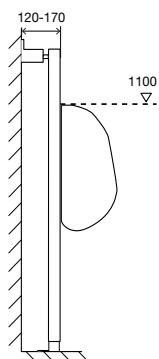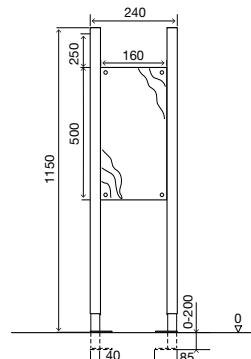

- Frame for wall-hung urinal dividers;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Adjustable height from 0 to 200mm;
- Strengthened wood panel;
- 10 year warranty.

Included

- Frame fixing material.



CÓD DESCRIPTION


031526 EASY Sanitarblock



OLI develops and produces a diverse range of sanitary installation solutions, with the aim of contributing to a bathroom without water waste, which is comfortable and accessible for all.

ECO URINAL FRAME

NEW

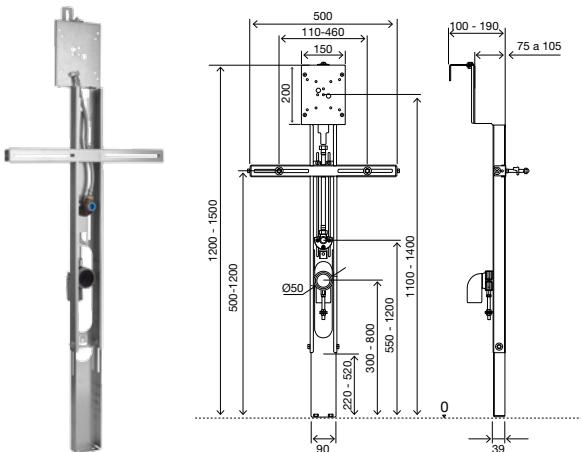

CÓD DESCRIPTION

879116 ECO URINAL frame

- Frame for wall-hung urinals;
- Easy installation, compact and light;
- Compatible with wall-hung urinal models and fluxometer;
- For wall-hung urinals in wall fixing, built-in or plasterboard wall installation;
- The fluxometer has to be installed before closing the wall;
- Height adjustable from 0 to 300mm;
- 10 year warranty.

Included

- Frame fixing material;
- Outlet bend 50/50 (adjustable);
- G 1/2 fitting for tap connection (adjustable);
- 1/2 flexible hose.


Compatibility

eAQUA urinal Trend urinal SM15 urinal Globe urinal



URINAL

Sanitarblock

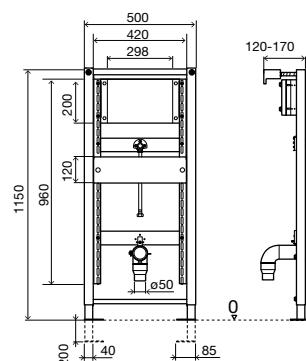

CÓD DESCRIPTION

136179 URINAL Sanitarblock

- Frame for wall-hung urinals;
- For built-in or plasterboard wall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Frame tested for a 130kg load;
- Height adjustable from 0 to 200mm;
- Adjustable attachment plates;
- The fluxometer has to be installed before closing the wall;
- 10 year warranty.

Included

- Frame fixing material;
- Outlet bend Ø 50/50 ;
- G 1/2" fitting for tap connection (adjustable);
- 1/2" flexible hose.

Compatibility

eAQUA urinal Trend urinal SM15 urinal Globe urinal




CONTROL PLATES



The wide range of OLI control plates are characterized by their versatility and durability. Designed with cutting edge technology they are suitable for all bathrooms, whether they be public bathrooms or private bathrooms.

OLI has the perfect control plate for any situation. From infrared sensors that allow flushing without having to touch the control plate to models that are highly resistant and vandal proof for public bathrooms.

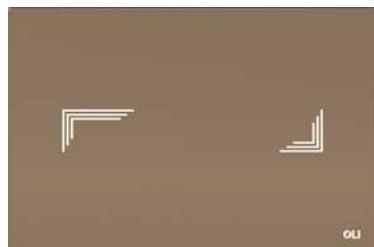


NO-TOUCH

- Innovative concept with capacitive sensors;
- Compatible with Hydroboost or AC system.



MECHANICAL

- Dual flush system;
- High range of control plates;
- Mechanical activation by pull or push.

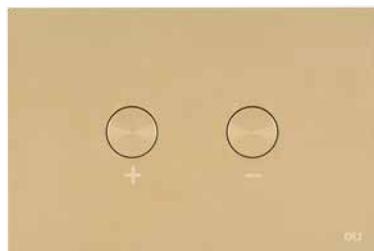

PNEUMATIC

- Dual flush system;
- Soft Activation;
- Pneumatic kit available.










FOOT CONTROL

- Ideal solution for users with reduced mobility;
- Floor and wall foot control plate.



CONTROL PLATES

TRIBE	MOON	GLAM	NARROW	INO-X 01	GLOBE	SLIM	PLAIN
 879065 White	 059887 White	 139178 White OLPure	 148300 White OLPure	 660001 Polished chrome	 152949 White	 659041 White	 070826 White
 879063 Black	 878981 Black	 139179 Polished chrome OLPure	 148301 Polished chrome OLPure	 661001 Brushed	 152950 Polished chrome	 659044 Polished chrome	 070827 Polished chrome
 879066 Red	 068130 White	 139180 Matt chrome OLPure	 148302 Matt chrome OLPure		 152951 Matt chrome	 659046 Matt chrome	 070828 Matt chrome
 879068 Anthracite	 069857 Black	 139181 Black soft-touch OLPure	 148303 Black soft-touch OLPure	 660002 Polished chrome	 152952 Black soft-touch	 659055 Black soft-touch	 070829 Black soft-touch
 879067 Gold plated	 878700 Gold Plated	 139184 White	 152939 White	 661002 Brushed	 152953 Grey soft-touch	 010216 Grey soft-touch	 670001 White
 879071 Taupe	 878703 Red	 139185 Polished chrome	 152940 Polished chrome		 152954 Gold plated	 154962 Gold plated	 670004 Polished chrome
 878702 Anthracite	 878701 Taupe	 139186 Matt chrome	 152941 Matt chrome		 878910 Bronze	 057141 Inox	 670005 Black soft-touch
		 139187 Black soft-touch	 152942 Black soft-touch		 638501 White	 670006 Matt chrome	 670008 White soft-touch
				 660006 Polished chrome	 638504 Polished chrome		
				 661006 Brushed	 638506 Matt chrome		
					 638508 Gold plated		

OCEANIA	RIA	KARISMA	SALINA	SM15	BLINK	ELECTRA III	eAQUA URINAL
<p>054564 Mech stainless steel - Brushed 054561 Pneu stainless steel - Brushed</p> <p>054554 Mech glass White 054989 Pneu glass White</p> <p>054557 Mech glass Black 054992 Pneu glass Black</p> <p>054562 Mech stainless steel button - glass Black 054996 Pneu stainless steel button - glass Black</p> <p>054558 Mech stainless steel button - glass White 054558 Pneu stainless steel button - glass White</p> <p>054563 MIA mech (customizable) 054997 MIA pneu (customizable)</p>	<p>640581 White</p> <p>640584 Polished chrome</p> <p>640586 Matt chrome</p> <p>640591 White bactel proof</p> <p>010244 Polished chrome</p> <p>010234 White</p>	<p>641001 White</p> <p>641004 Polished chrome</p> <p>641006 Matt chrome</p> <p>641015 Black soft-touch</p>	<p>640081 White</p> <p>640084 Polished chrome</p> <p>640086 Matt chrome</p> <p>640097 Black soft-touch - Polished chrome button</p>	<p>022238 White tempered glass</p> <p>046199 Polished chrome</p> <p>878783 Gold plated</p> <p>878784 Bronze</p>	<p>154963 Polished chrome</p> <p>093399 Brushed</p> <p>216621 White</p> <p>878489 Black</p>	<p>656006 Polished chrome zamac</p> <p>079205 Polished chrome zamac</p> <p>079207 Polished chrome zamac</p>	<p>879120 Brushed Stainless steel AC</p> <p>031752 Polished chrome zamac</p>
				<p>046198 Brushed</p> <p>878781 Gold plated</p> <p>878782 Bronze</p>			<p>878466 White</p> <p>878818 Polished chrome</p> <p>878819 Matt chrome</p> <p>878820 Black soft-touch</p> <p>878821 Grey soft-touch</p> <p>878822 Gold plated</p> <p>878823 Bronze</p>

COMPATIBILITY TABLE

TRIBE													
OLI120 PLUS													
OLI120													
OLI74 PLUS													
OLI80													
EXPERT PLUS Possible lower position													
QUADRA PLUS													

											IN COMPLIANCE WITH
iPLATE	RIA STOP	RIA	RIVER	TREND	SALINA	KARISMA	EASY DUAL	METAL	ELECTRA III	ELECTRA II	ELECTRA I
Minimum 15mm	Minimum 10mm	Minimum 10mm	Minimum 10mm	Minimum 20mm	Minimum 20mm	Minimum 20mm					
Minimum 15mm	Minimum 10mm	Minimum 10mm									
Minimum 25mm	Minimum 25mm										
Minimum front application 0mm	Minimum front application 0mm			Minimum Top application 30mm	Minimum Top application 30mm						
10mm	5mm	5mm	5mm	30mm	30mm						
Minimum 10mm	Minimum 5mm	Minimum 5mm	Minimum 5mm	15mm	15mm	15mm					



PNEUMATIC VERSION



VERSION NO-TOUCH



ELECTRONIC VERSION




MECHANICAL VERSION

measurements are in mm

Green is a Trend Sustainability is a Mindset

Features a new and improved capacitive sensor with enhanced capabilities. OLI's brand new control plate presents itself with two distinct power options.

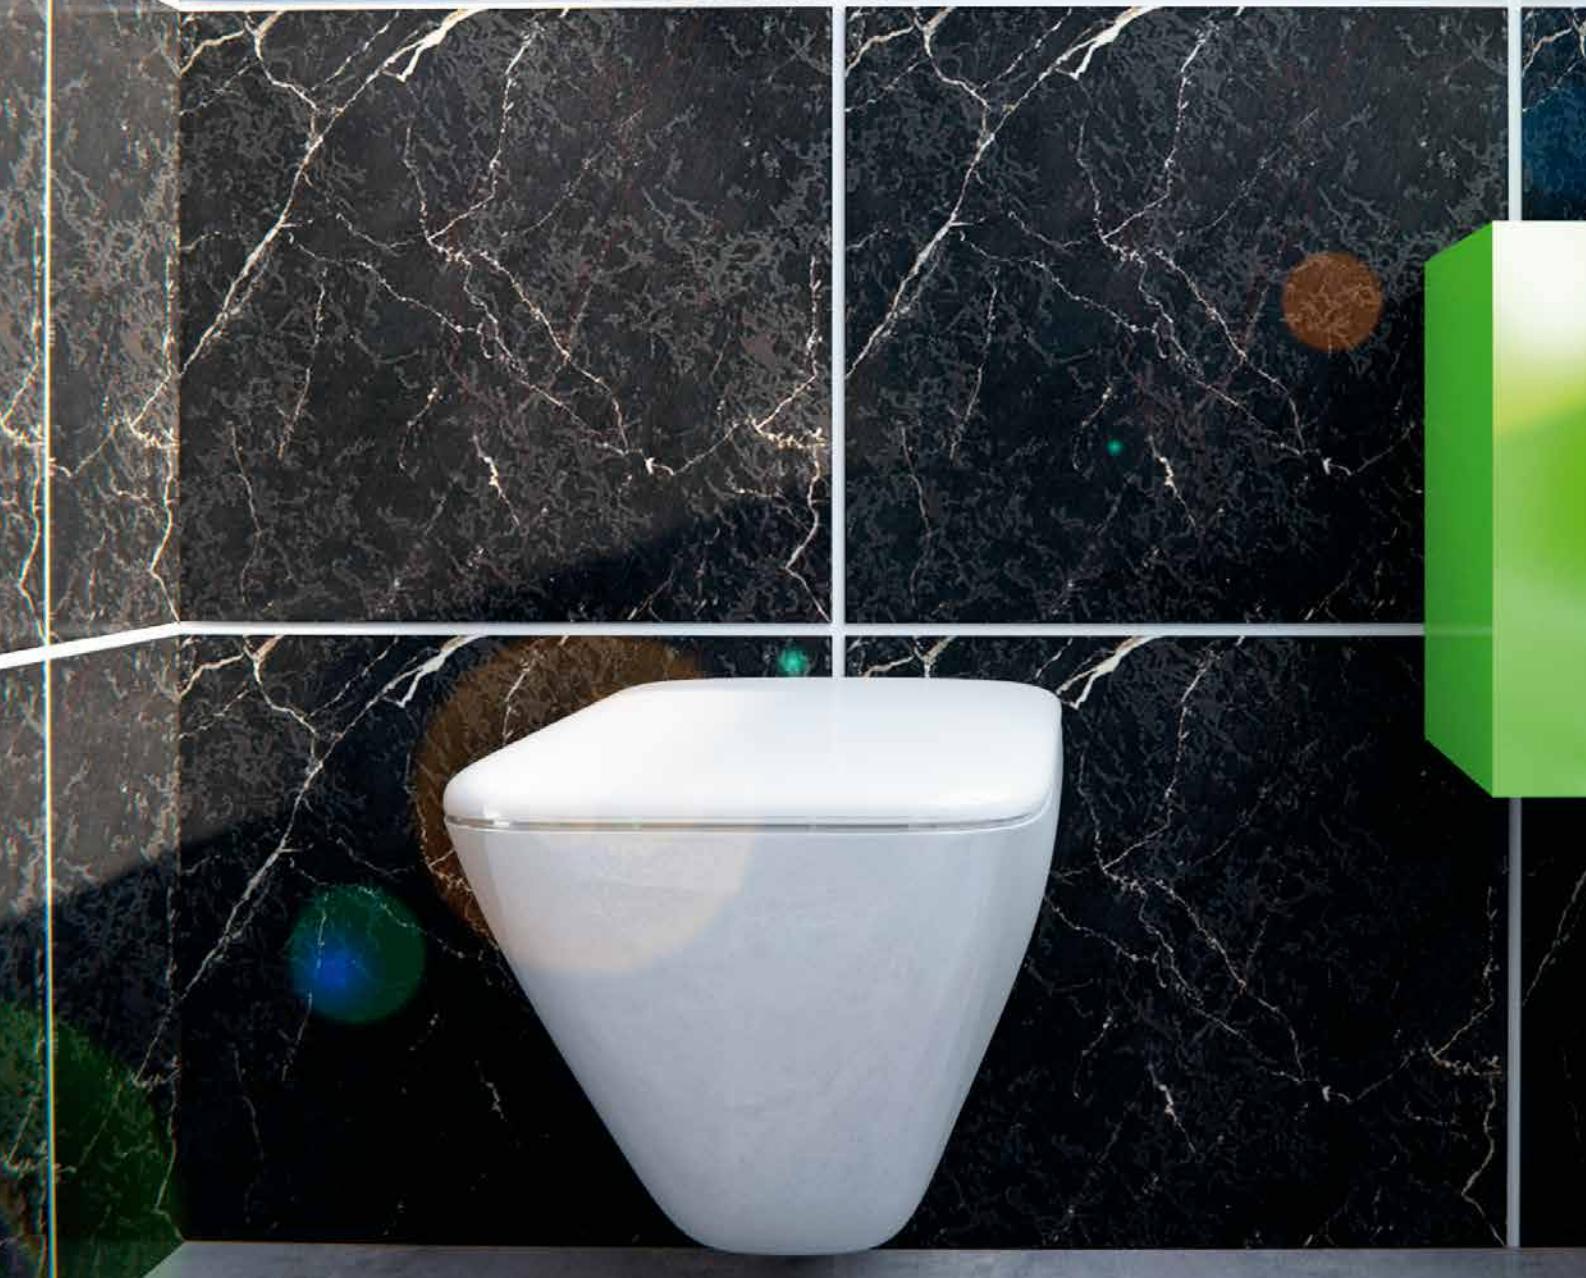

TRIBE



AC POWER-MAINS



Innovative concept with capacitive sensors.
Plug and play.

- No-touch activation through capacitive sensors with led signs, multiple colours available;
- Dual flush;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- 4mm thick;
- Anti-error electronic connections;
- Waterproof connectors;
- One-piece tempered glass;
- 2 year warranty.




Hydroboost

- Go Green with OLI's self sustainable power option.




CÓD DESCRIPTION

879065	<input type="radio"/>	TRIBE White	
879063	<input checked="" type="radio"/>	TRIBE Black	
879066	<input checked="" type="radio"/>	TRIBE Red	
879068	<input checked="" type="radio"/>	TRIBE Anthracite	
879067	<input checked="" type="radio"/>	TRIBE Gold plated	
879071	<input checked="" type="radio"/>	TRIBE Taupe	

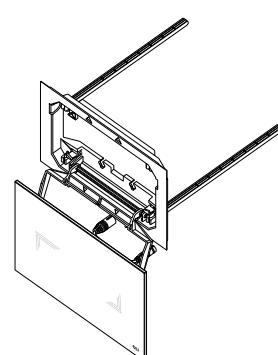



MOON



- One-piece in white or black ceramic material;
- Dual flush;
- No-touch activation through capacitive sensors;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- Anti-error electronic connections;
- Waterproof connectors;
- 2 year warranty.



VISTA ALEGRE
1824

CÓD DESCRIPTION

878848	○ MOON White
878981	● MOON Black <small>(NEW)</small>




No-touch activation

The use of capacitive sensors enabled OLI to develop the concept around a one-piece ceramic plate with innovative formal and tactile features that ensure superior hygiene levels and ergonomics.

Simple and intuitive

The simple and elegant design of the Moon plate combines high technology with tradition, resulting in a smooth and comfortable interface for the user, whose elegance of shapes highlights the dual flush and favours the half flush.

GLASSY




- No-touch activation through capacitive sensors with led signs, multiple colours available;
- Dual flush;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- 4mm thick;
- Anti-error electronic connections;
- Waterproof connectors;
- One-piece tempered glass;
- 2 year warranty.




CÓD DESCRIPTION

878849	○ GLASSY White
878850	● GLASSY Black
878700	○ GLASSY Gold plated <small>(NEW)</small>
878703	○ GLASSY Red <small>(NEW)</small>
878702	● GLASSY Anthracite <small>(NEW)</small>
878701	○ GLASSY Taupe <small>(NEW)</small>

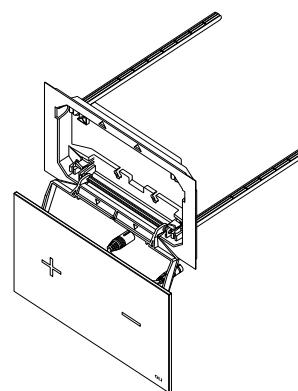

Buttons

Elegant in design with two buttons for the dual flush system which perfectly characterize the pistons of a trumpet (the button with the “+” symbol for the full flush and the button with the “-” symbol for the half flush).

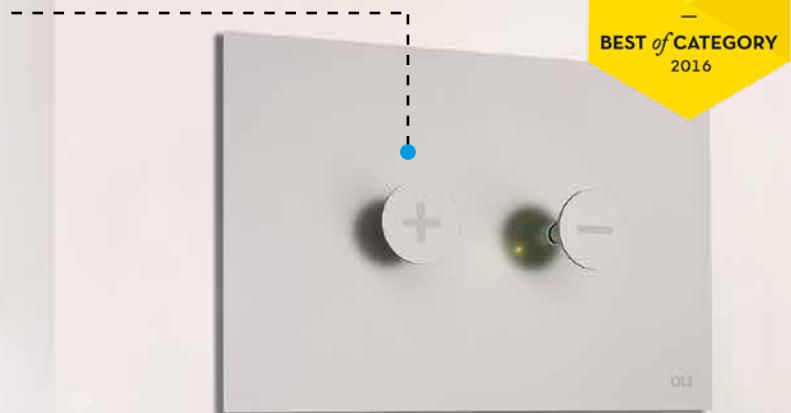


"I am very pleased with the prestigious "Best of Category 2016" award for the Trumpet control plate. The quality achieved is due to the competent and committed contribution of the technicians at OLI. It was a pleasure to evolve the design of the control plate with them.



Álvaro Siza "



TRUMPET

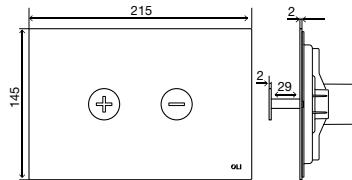

- Designed by Architect Siza Vieira;
- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick;
- Stainless steel material;
- 2 year warranty.



CÓD DESCRIPTION

046199 ⚪ TRUMPET Polished chrome

046198 ⚫ TRUMPET Brushed

878783 ⚪ TRUMPET Gold plated (NEW)

878784 ⚫ TRUMPET Bronze (NEW)



SIZA VIEIRA

Siza Vieira - one of the most prestigious and awarded Portuguese architects, with a Pritzker Prize and the Golden Lion for Lifetime Achievement, to name a few - designed a true masterpiece, inspired in an instrument played by great maestros: the trumpet. OLI is proud to present the "Trumpet", the perfect balance between a truly unique design and exceptional music.




Álvaro Siza Vieira is a world-renowned architect who has collected several international awards, Pritzker Prize in 1992; The Wolf Prize of Arts in 2001; the Golden Lion for Lifetime Achievement in 2012; the Fritz Hoger award in 2014, just to name a few.

The Trumpet control plate was designed by Álvaro Siza Vieira and is the perfect combination of elegance and harmony, both characteristics of a trumpet.

In 2016, the "Trumpet" was selected "Best of Category" for the "Archiproducts Design Awards" one of the most prestigious awards of Architecture and Design worldwide.

SM15

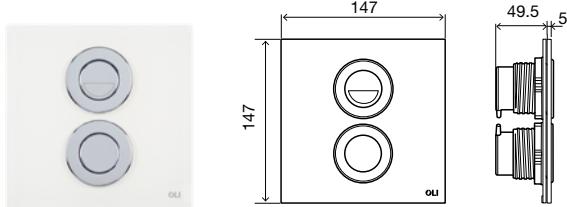


- Designed by Architect Souto de Moura;
- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- Installation on the surface wall with 150mm x150mm tiles;
- White tempered glass material;
- 2 year warranty.




CÓD DESCRIPTION

022238 SM15 White tempered glass

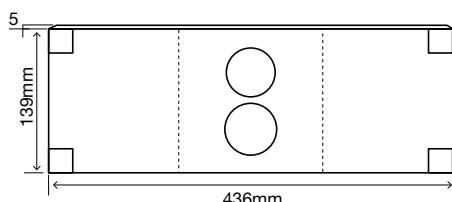

The support and inspection plate has the necessary dimensions to apply the control plate and two Portuguese tiles in the extremities, in order to ensure access to the in-wall cistern for maintenance.

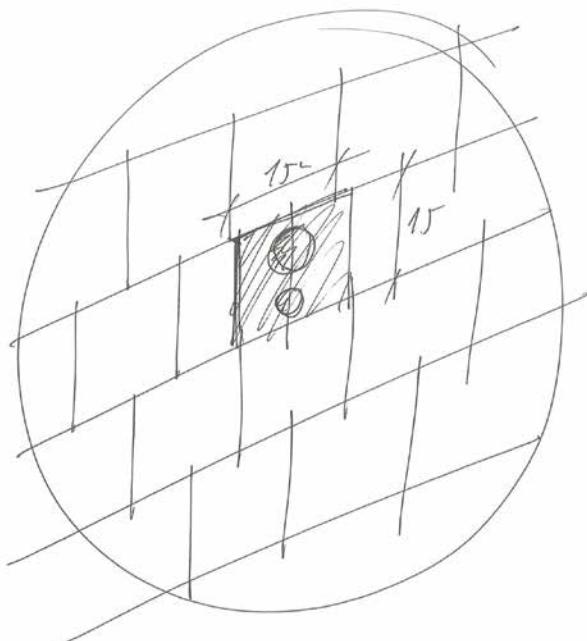


Souto de Moura

Compatibility

Matching urinal control plate also available.
(see page 113 for more information)



EDUARDO SOUTO DE MOURA

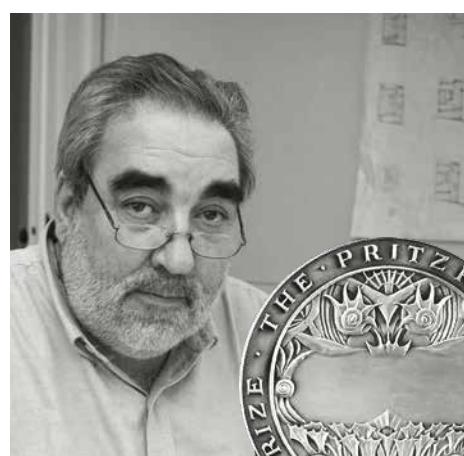


Souto de Moura is a renowned Portuguese architect who has been presented with various international awards, such as, the Gold Medal of Heinrich Tessenow Foundation in 2001; the Pritzker Award in 2011; the Wolf Prize of Arts in 2013; just to name a few. In 2001, in collaboration with OLI, Souto de Moura developed the SM15 for the new Pousada of Portugal in Covilhã.


INO-X





INO-X 01

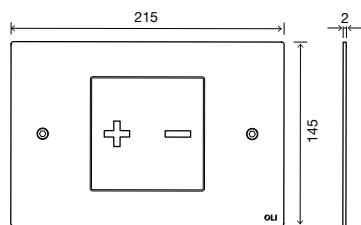


- Designed by Architect Romano Aldolini;
- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 2 mm thick;
- Tiltable button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.




INO-X 02

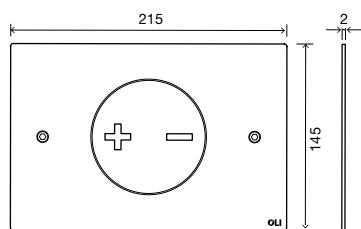

INO-X 03




INO-X 06



CÓD DESCRIPTION

660001	INO - X 01 Polished chrome
661001	INO - X 01 Brushed
660002	INO - X 02 Polished chrome
661002	INO - X 02 Brushed
660003	INO - X 03 Polished chrome
661003	INO - X 03 Brushed
660006	INO - X 06 Polished chrome
661006	INO - X 06 Brushed

ROMANO ADOLINI

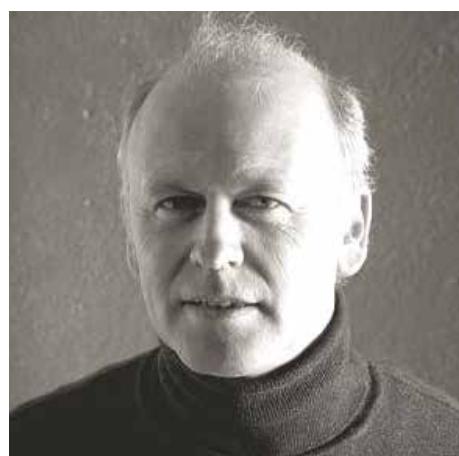

The Ino-x control plate collection was designed by Romano Aldolini, an Italian architect and designer who is an influential figure in bathroom design.

The Ino-x collection is simple, elegant and with a strong visual impact: "A simple sheet of steel that is only 2mm thick cut with a precise laser".





Creating your own masterpiece

The stainless steel frame elegantly outlines the Oceania MIA button. Choose the material of your choice (wood, marble, ceramic, etc.) and using the supplied tools, personalize your own control plate.



OCEANIA

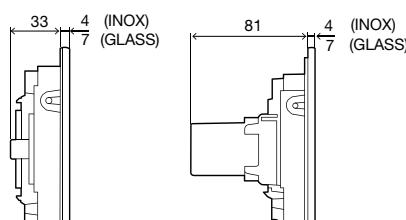

Pneumatic *

- Dual Flush;
- Mechanical or pneumatic actuation*;
- Actuation force < 20 N;
- Reduced thickness;
- Tilttable button;
- Gull-Wing opening system, which prevents damages;
- Vandal resistant;
- Different finishing possibilities and combinations: Tempered glass, Stainless steel or Tempered glass plate with matt chrome Stainless steel button;
- 2 year warranty.





CÓD DESCRIPTION

054564	OCEANIA mech stainless steel - Brushed
054561	OCEANIA mech stainless steel - Polished chrome
054554	OCEANIA mech glass White
054557	OCEANIA mech glass Black
054562	OCEANIA mech stainless steel button - glass Black
054558	OCEANIA mech stainless steel button - glass White


CÓD DESCRIPTION

054988	OCEANIA pneu stainless steel - Brushed
054998	OCEANIA pneu Stainless steel - Polished chrome
054989	OCEANIA pneu glass White
054992	OCEANIA pneu glass Black
054996	OCEANIA pneu stainless steel - glass Black
054993	OCEANIA pneu stainless steel - glass White

OCEANIA MIA



Mechanical



Pneumatic *

An infinite world of custom-made finishings

Customize your Oceania with your preferred finishing with any 10-mm-thick material. The Oceania Mia control plate is provided with a high-resistance dual-adhesive glue for easy application of any front finishing of your choice. For the finishing of your control plate to be perfect, this version is provided with a stainless steel frame and matt chrome push button. Choose the finishing of your preference and treat yourself to a unique control plate.



CÓD DESCRIPTION


054563	OCEANIA MIA mech (customizable)
054997	OCEANIA MIA pneu (customizable)

* Installation - minimum front wall thickness (pneumatic version):
OLI120 plus: 35mm; OLI74 Plus: 25mm; Expert PLUS- Front Application: 0mm ;Expert PLUS- Top Application: 30mm and QUADRA: 15mm

NOTE. See compatible flush cisterns on Page 90.

measurements are in mm

GLOBE

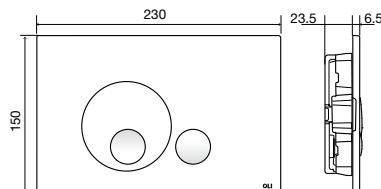

- Dual flush Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with “click” system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing;
- 2 years warranty.



CÓD DESCRIPTION

152949 ○ GLOBE White

152950 ● GLOBE Polished chrome

152951 ○ GLOBE Matt chrome

152952 ● GLOBE Black soft-touch

152953 ● GLOBE Grey soft-touch


152954 ○ GLOBE Gold plated (NEW)

878910 ○ GLOBE Bronze (NEW)

Matching urinal control plate also available.
(see page 113 for more information)



SLIM

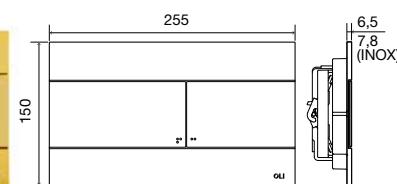

- Dual flush with braille descriptions;
- Mechanical actuation;
- Actuation force < 20 N;
- 6,5 mm thick;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.



CÓD DESCRIPTION

659041 ○ SLIM White

659044 ○ SLIM Polished chrome

659046 ○ SLIM Matt chrome

659055 ● SLIM Black soft-touch

010216 ● SLIM Grey soft-touch



154962 ○ SLIM Gold plated (NEW)

057141 ○ SLIM Inox

SLIM INOX

- ABS control plate with brushed Stainless steel cover;
- Higher resistance;
- 7,8 mm thick.

GLAM

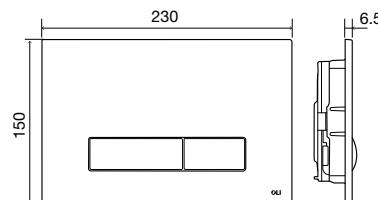


CÓD DESCRIPTION



	139178 ○ GLAM White OLIpure
	139179 ⚪ GLAM Polished chrome OLIpure
	139180 ⚫ GLAM Matt chrome OLIpure
	139181 ● GLAM Black soft-touch OLIpure
139184 ○	GLAM White
139185 ⚪	GLAM Polished chrome
139186 ⚫	GLAM Matt chrome
139187 ●	GLAM Black soft-touch

- Dual flush;
- OLIpure compatible version;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- 2 years warranty.

OLI[®]

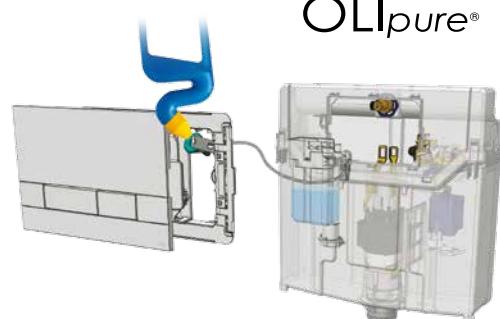

NARROW


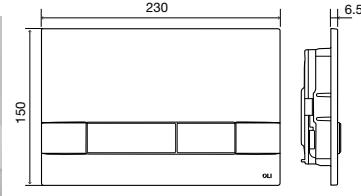


CÓD DESCRIPTION

	148300 ○ NARROW White OLIpure
	148301 ⚪ NARROW Polished chrome OLIpure
	148302 ⚫ NARROW Matt chrome OLIpure
	148303 ● NARROW Black soft-touch OLIpure
152939 ○	NARROW White
152940 ⚪	NARROW Polished chrome
152941 ⚫	NARROW Matt chrome
152942 ●	NARROW Black Soft-Touch

- Dual flush
- OLIpure version available
- Mechanical actuation
- Actuation force < 20 N
- 6.5mm thick
- Opening and closing with "click" system.
- ABS control plate: high resistance to scratches
- 2 years warranty.

PLAIN

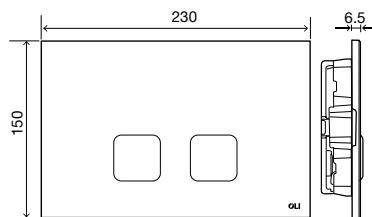

CÓD DESCRIPTION

070826 PLAIN White



070827 PLAIN Polished chrome

070828 PLAIN Matt chrome

070829 PLAIN Black soft-touch

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.

iPLATE

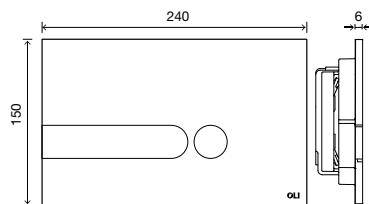

Kit Elegance



Kit Fantasy



CÓD DESCRIPTION

670001 iPLATE White

670004 iPLATE Polished chrome

670005 iPLATE Black soft-touch

670006 iPLATE Matt chrome


670008 iPLATE White soft-touch

670051 KIT FANTASY iPLATE


670052 KIT ELEGANCE iPLATE

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 6 mm thick;
- Wide range of colours and combinations;
- Possibility of replacing the control buttons with kit elegance and kit fantasy;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.


RIA / RIA STOP



Ria



Ria stop

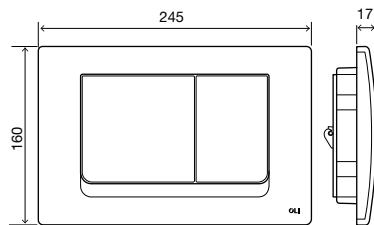

CÓD DESCRIPTION

640581 RIA White

640584 RIA Polished chrome

640586 RIA Matt chrome


640591 RIA White bacterial proof

010234 RIA stop White

010244 RIA stop Polished chrome

- Dual flush or single flush;
- Mechanical actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Anti-bacterial finishing available;
- 2 year warranty.

RIVER

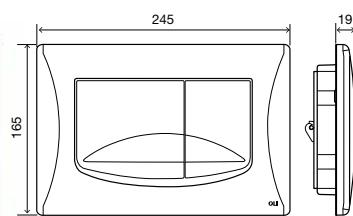

CÓD DESCRIPTION

638501 RIVER White


638504 RIVER Polished chrome

638506 RIVER Matt chrome

638508 RIVER Gold plated

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- 2 year warranty.

SALINA

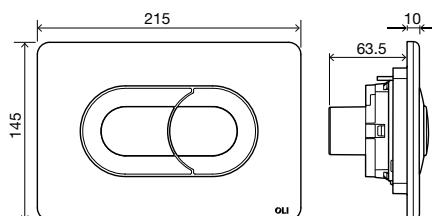

CÓD DESCRIPTION

640081 SALINA White

640084 SALINA Polished chrome

640086 SALINA Matt chrome

640097 SALINA Black soft-touch - Polished chrome button



- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available and possible finishing combinations;
- 2 year warranty.

NOTE. See compatible flush cisterns on Page 90.

measurements are in mm

105

BLINK

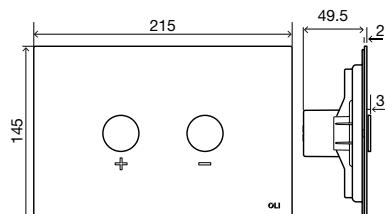

BLINK

- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick;
- Stainless steel material;
- 2 years warranty.



CÓD DESCRIPTION

154963 ⚪ BLINK Polished chrome

093399 ⚪ BLINK Brushed

216621 ⚪ BLINK White

878489 ⚪ BLINK Black




878781 ⚪ BLINK Gold plated



878782 ⚪ BLINK Bronze



TREND

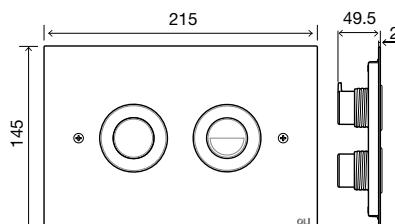

- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- 2mm thick;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.



CÓD DESCRIPTION

656504 ⚪ TREND Polished chrome


656506 ⚪ TREND Matt chrome

Matching urinal control plate also available.
(see page 112 for more information)



EASY DUAL

COMPLIANT WITH SAFETY REGULATIONS AGAINST FIRE AND PANIC HAZARDS IN PUBLIC BUILDINGS (ERP) - ARTICLE CO 31




CÓD DESCRIPTION



011640	<input type="radio"/> EASY DUAL white	<small>(NEW)</small>
011642	<input checked="" type="radio"/> EASY DUAL Chrome	

- Dual flush;
- Pneumatic actuation;
- Compatible with all pneumatic in-wall cisterns;
- ABS control plate;
- Vandal resistant;
- Adjustable buttons: 0mm, 18mm or 32mm
- 2 year warranty.

Not meant to be used in the opening of the in-wall cistern. An inspection plate (code 207892) should be applied to ensure access to the cistern. Pre-installation necessary.

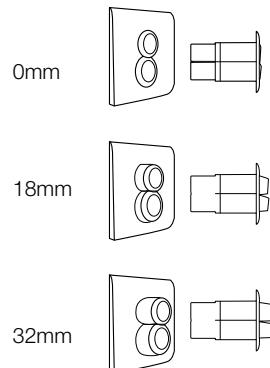

KARISMA

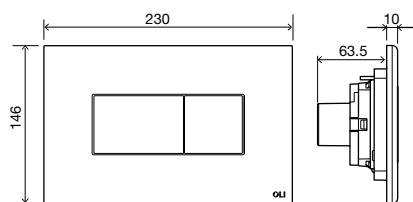

- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available and possible finishing combinations;
- 2 year warranty.




CÓD DESCRIPTION

641001	<input type="radio"/> KARISMA White
641004	<input checked="" type="radio"/> KARISMA Polished chrome
641006	<input type="radio"/> KARISMA Matt chrome
641015	<input type="radio"/> KARISMA Black soft-touch

Installation - minimum front wall thickness:
OLI120 plus: 20mm; OLI74 Plus: 25mm; Expert PLUS- Front Application: 0mm ;Expert PLUS- Top Application: 30mm; Quadra: 15mm

COMMERCIAL



The wide range of OLI control plates are characterized by their versatility and durability. Designed with cutting edge technology they are suitable for all bathrooms, whether they be public bathrooms or private bathrooms.

OLI has the perfect control plate for any situation. From infrared sensors that allow flushing without having to touch the control plate to models that are highly resistant for public bathrooms.



Vandal resistant

OLI control plates are ideal for commercial applications.




Hygiene 100%

Equipped with an infrared sensor, Electra II and Electra III control plates flush without touching the control plate. 100% Hygienic.



METAL



- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- Vandal resistant;
- Zamac material;
- 2 year warranty.




CÓD DESCRIPTION

656004 METAL Polished chrome

656006 METAL Matt chrome

SLIM INOX

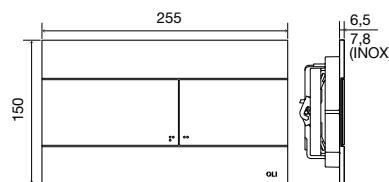



- ABS control plate with brushed Stainless steel cover;
- Higher resistance;
- 7.8 mm thick;
- 2 year warranty.



CÓD DESCRIPTION

057141 SLIM Inox

RIA

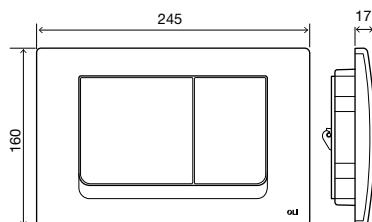

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Antibacterial plastic;
- 2 year warranty.




CÓD DESCRIPTION

640591 RIA White antibacterial



ELECTRA III

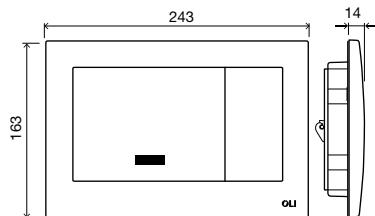

CÓD DESCRIPTION

079206 ELECTRA III Polished chrome zamac

- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor or mechanical actuation;
- Actuation force < 20 N;
- Compatible with OLI120 Plus and OLI74 Plus electronic version;
- Electric power connection with pre-installation needed (adapter 230v/120v not included);
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

Matching urinal control plate also available.
(see page 112 for more information)



ELECTRA II



CÓD DESCRIPTION


079205 ELECTRA II Polished chrome zamac

- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor actuation;
- Compatible with OLI120 Plus and OLI74 Plus electronic version;
- Electric power connection with pre-installation needed (adapter 230v/120v not included);
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

Matching urinal control plate also available.
(see page 112 for more information)




ELECTRA I

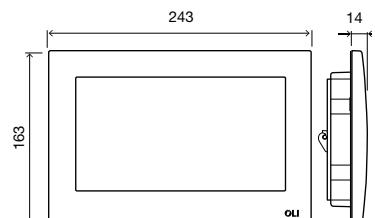

CÓD DESCRIPTION

079207 ELECTRA I Polished chrome zamac



- Single flush;
- Activation by switch (not included) or mechanical;
- Actuation force < 20 N;
- Compatible with OLI120 Plus and OLI74 Plus electronic version;
- Electric power connection with pre-installation needed (adapter 230v/120v not included);
- Connecting cable to the switch (4m) included;
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

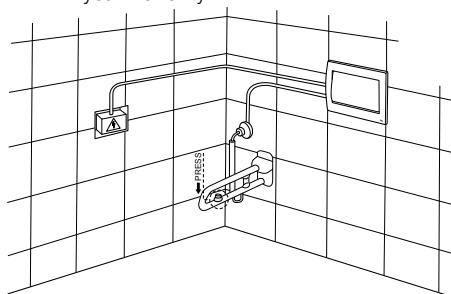

NOTE. See compatible flush cisterns on Page 90.

measurements are in mm

eAQUA URINAL

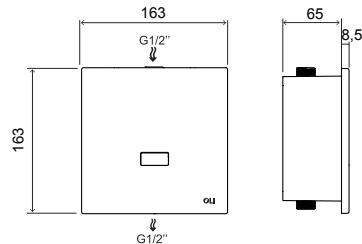

Urinal concealed pre-installation

CÓD DESCRIPTION


879120	eAQUA URINAL Polished chrome AC	
879119	eAQUA URINAL Polished chrome BATT	
879123	Urinal concealed pre-installation	

- Brushed stainless-steel front plate;
- Double infrared sensors (with automatic setting feature);
- Dynamic sensor: constantly adjusts the optimum range;
- Temporary-off (cleaning) and short-on (manual flush) activate with touch;
- Flush time and sensor sensitivity adjustable with touch;
- 24- or 48-hour hygienic flush and pre-flush activate with touch;
- Compatible with ECO and URINAL Sanitarblock the fluxometer has to be installed before closing the wall;
- Vandal resistant;
- 2 year warranty.


Urinal concealed pre installation

- Operating pressure: 0,3 - 10 bar;
- Flow rate: ca. 20 l/min. (3 bar);
- 6V Lithium CRP 2 (standard: life time up to 4 years) / mains power supply 230V/6V;
- Standards: DIN EN 200; CE.

Matching ELECTRA control plate also available.
(see page 111 for more information)



TREND URINAL

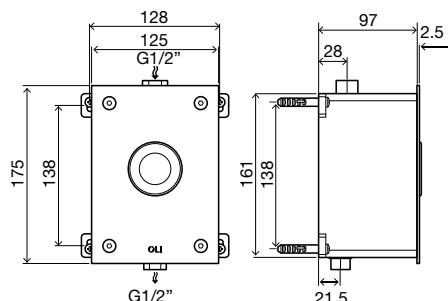

CÓD DESCRIPTION


031752	TREND URINAL Polished chrome zamac
--------	------------------------------------

- Single flush;
- Mechanically actuated fluxometer;
- Adjustable flush time;
- Adjustable flow;
- Operating pressure ≥3bar;
- G ½ water connections;
- 2,5mm thick;
- Vandal resistant;
- Polished chrome Zamac material;
- Compatible with ECO and URINAL Sanitarblock the fluxometer has to be installed before closing the wall;
- 2 year warranty.

Matching TREND control plate also available.
(see page 106 for more information)



SM15 URINAL

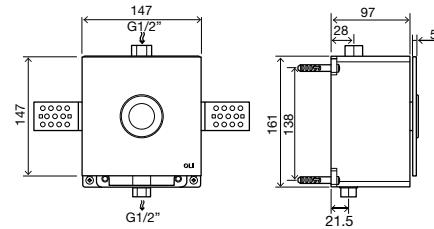

- Single flush;
- Mechanically actuated fluxometer;
- Adjustable flush time;
- Adjustable flow;
- Operating pressure ≥ 3 bar;
- G 1/2 water connections;
- 5mm thick;
- White tempered glass material;
- Compatible with ECO and URINAL Sanitarblock the fluxometer has to be installed before closing the wall;
- 2 year warranty.






CÓD DESCRIPTION

034265 ○ SM15 URINAL White tempered glass

Matching SM15 control plate also available.
(see page 98 for more information)



GLOBE URINAL

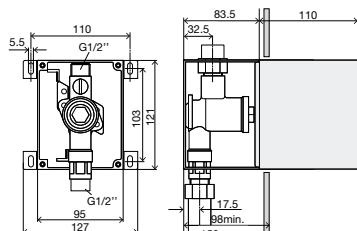

Urinal concealed pre-installation

CÓD DESCRIPTION

- 878466 ○ GLOBE URINAL White (NEW)
- 878818 ● GLOBE URINAL Polished chrome (NEW)
- 878819 ● GLOBE URINAL Matt chrome (NEW)
- 878820 ● GLOBE URINAL Black soft-touch (NEW)
- 878821 ● GLOBE URINAL Grey soft-touch (NEW)
- 878822 ● GLOBE URINAL Gold plated (NEW)
- 878823 ● GLOBE URINAL Bronze (NEW)
- 879017 Urinal concealed pre-installation (NEW)

- Single flush;
- Mechanically actuated;
- Multiple colours available;
- ABS control plate: high resistance to scratches;
- Vandal resistance;
- Compatible with ECO and URINAL Sanitarblock the fluxometer has to be installed before closing the wall;
- 2 years warranty.

Urinal concealed pre installation


- Protection cover;
- Pre-assembled water path with isolating valve;
- Sealing plug;
- Adjustable flow;
- Flow pressure: 0,8 - 5 bar;
- Flush volume: 0,3 l/s;
- G 1/2 water connection.

Matching GLOBE control plate also available.
(see page 102 for more information)



ACCESSORIES


PNEUMATIC CONVERSION KIT OLI120 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.


CÓD	DESCRIPTION
154084	Pneumatic Conversion Kit OLI120 PLUS

HYDROBOOST CONVERSION KIT OLI120 PLUS

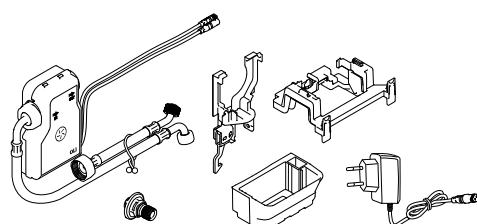

CÓD	DESCRIPTION
878294	Hydroboost Conversion Kit OLI120 PLUS

ELECTRONIC CONVERSION KIT FOR OLI120 PLUS




- Transformer is not supplied;
- Pre-installation of the electric connection is needed.




CÓD	DESCRIPTION
154085	KIT eletrónico OLI120 PLUS

AC CONVERSION KIT OLI 120 PLUS

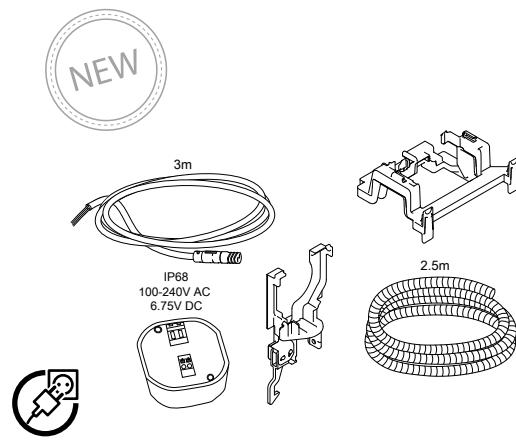


CÓD	DESCRIPTION
878293	AC conversion kit OLI 120 PLUS

AC CONVERSION KIT OLI74 PLUS

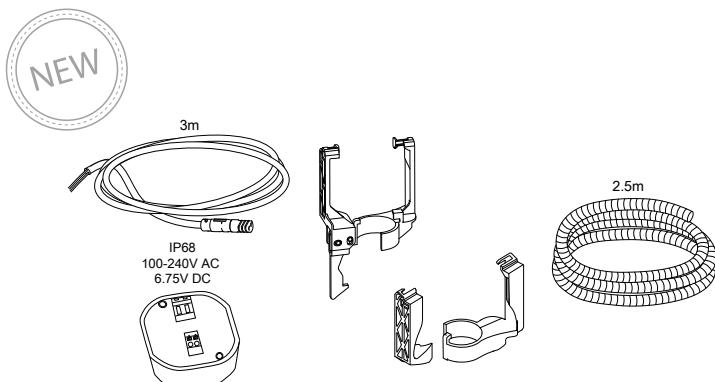

CÓD	DESCRIPTION
878292	AC conversion kit OLI74 PLUS


PNEUMATIC CONVERSION KIT FOR OLI74 PLUS

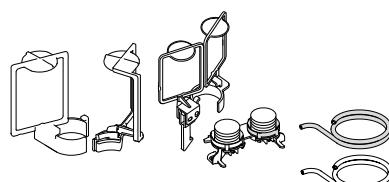

- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CÓD	DESCRIPTION
601527	Pneumatic Conversion Kit for OLI74 PLUS

ELECTRONIC CONVERSION KIT FOR OLI74 PLUS




- Flush valve included;
- Transformer is not supplied;
- Pre-installation of the electric connection is needed.



CÓD	DESCRIPTION
077754	Electronic conversion KIT for OLI74 PLUS


PNEUMATIC CONVERSION KIT FOR EXPERT PLUS

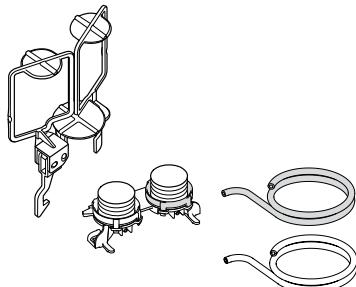

- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CÓD	DESCRIPTION
556807	Pneumatic Conversion Kit for EXPERT PLUS


MECHANIC CONVERSION KIT FOR EXPERT PLUS - TOP ACTUATION



- Compatible with top actuation control plates: Glam; Narrow; Globe and Plain.


CÓD	DESCRIPTION
211743	Mechanic Conversion Kit for EXPERT PLUS - top actuation

HYDROBOOST CONVERSION KIT FOR OLI74 PLUS

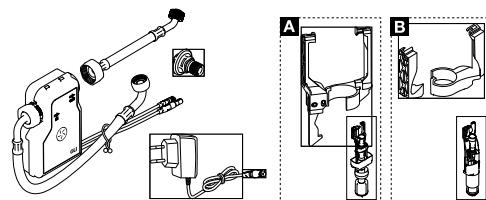

CÓD	DESCRIPTION
878285	Hydroboost Conversion KIT for OLI74 PLUS


MECHANIC CONVERSION KIT FOR EXPERT PLUS



- Outlet valve mechanical anchors;
- Levers.

CÓD	DESCRIPTION
601038	Mechanic Conversion Kit for EXPERT PLUS

FIXATION KIT FOR OLI74 PLUS





- Fixation Kit OLI74 PLUS direct, for plasterboard installation.

CÓD	DESCRIPTION
216640	Fixation kit for OLI74 PLUS

measurements are in mm


KIT DUPLEX

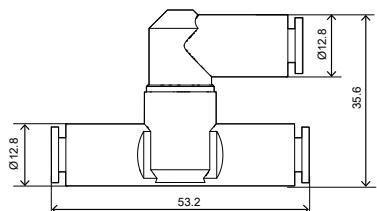

CÓD DESCRIPTION

216252 Kit duplex


SHOWER TOILET CONNECTIONS KIT

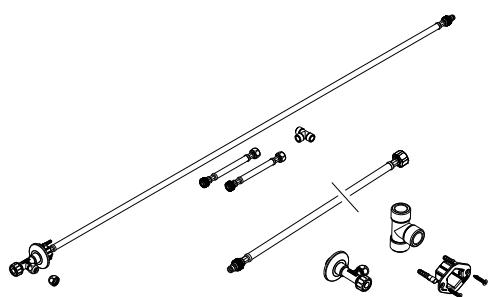

CÓD DESCRIPTION

191887 Shower toilet connections kit


SHOWER TOILET CONNECTIONS KIT (SHOWER INCLUDED)

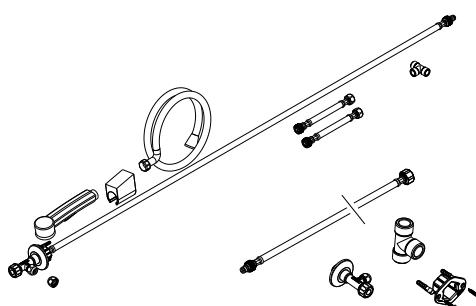

CÓD DESCRIPTION

878808 Shower toilet connections kit (shower included)


HAPPY AIR FAN

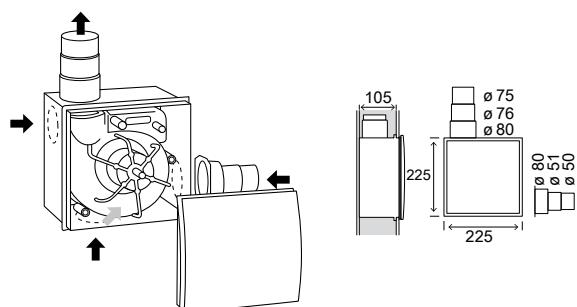

CÓD DESCRIPTION

101772 HAPPY AIR FAN for OLI74 Plus Happy Air

OLIPURE KIT

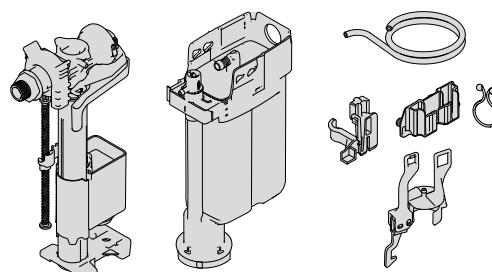

- Compatible with: OLI120 Plus, OLI74 Plus and Expert Plus-models.

CÓD DESCRIPTION

152974 OLIPure KIT


PP OUTLET BEND ADAPTOR Ø90/110



CÓD DESCRIPTION

086360 PP ADAPTOR Ø90/110

POWER SUPPLY




Input: 100 - 240 V AC;
Output: 12 V DC.

CÓD DESCRIPTION

079260 230/12V Power supply

INSPECTION PLATE




- Inspection plate for pneumatic versions: OLI74 PLUS, EXPERT PLUS, QUADRA PLUS and OLI120 PLUS;
- Vandal resistant;
- Stainless steel material.

CÓD DESCRIPTION

207892 Inspection plate Chrome
207893 Inspection plate Brushed

FLOOR SUPPORT SYSTEM WITH LATERAL FIXATION FOR SIMFLEX FRAMES

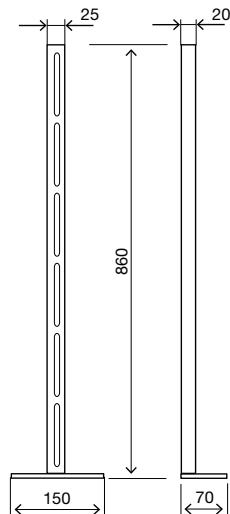


- Compatible with OLI Simflex frames;
- Fixing material included.

CÓD DESCRIPTION

620001 Floor support system with lateral fixation for Simflex frames

PNEUMATIC CONVERSION KIT FOR QUADRA

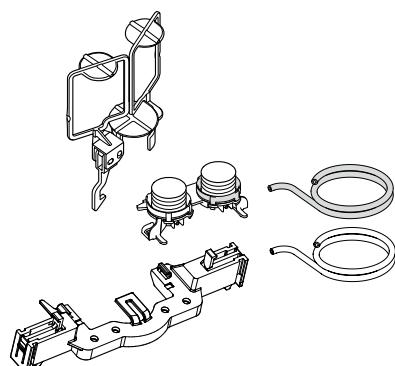


- 2 pneumatic pipes with 2,5m;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CÓD DESCRIPTION


101773 Pneumatic Conversion Kit for QUADRA

MINI TREND *



- Dual flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall cisterns;
- For light wall installations only;
- In-wall box for brickwall installation available upon request;
- Vandal resistant;
- Polished chrome Stainless steel material;
- 2 year warranty.

MONO TREND *

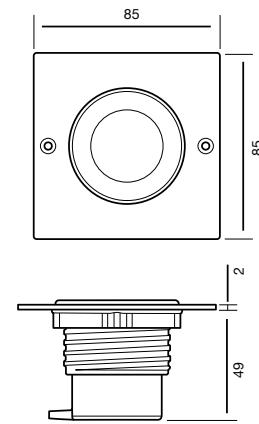


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- For light wall installations only;
- In-wall box for brickwall installation available upon request;
- Vandal resistant;
- Polished chrome Stainless steel material;
- 2 year warranty.

Included


- Pneumatic flexible hose L.2500 mm;
- Corrugated pipe L.2500 mm.

CÓD	DESCRIPTION
605294	MINI TREND

SPHERA *



Complete flush - Sphera +



Half flush - Sphera -



- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- For light wall installations only;
- Polished chrome ABS material;
- 2 year warranty.

Included

- Pneumatic flexible hose L.2500 mm;
- Corrugated pipe L.2500 mm.

CÓD	DESCRIPTION
605254	MONO TREND

PNEUMATIC ACTUATOR *



- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- White ABS material;
- 2 year warranty.

Included

- Fixing material
- Pneumatic flexible hose L. 2500 mm
- Protection pipe L. 2500 mm
- In-wall box

CÓD DESCRIPTION

605264 Pneumatic Actuators SPHERA +


605274 Pneumatic Actuators SPHERA -

CÓD DESCRIPTION

718063 In-wall Pneumatic actuator hand operated White

* Not meant to be used in the opening of the in-wall cistern. An inspection plate (code 207892) should be applied to ensure access to the cistern. Pre-installation necessary.

PNEUMATIC ACTUATOR *

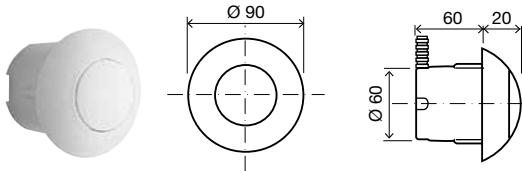

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- ABS material;
- 2 year warranty.


Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm;
- In-wall box.

CÓD DESCRIPTION

605001	<input checked="" type="radio"/> In-wall Pneumatic actuator hand operated White
605004	<input checked="" type="radio"/> In-wall Pneumatic actuator hand operated Polished chrome

PNEUMATIC ACTUATOR *

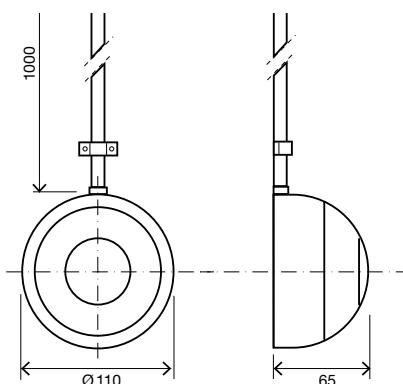

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- ABS material;
- 2 year warranty.


Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Aesthetic covering pipe L. 1000 mm.

CÓD DESCRIPTION

605101	<input checked="" type="radio"/> Pneumatic actuator hand operated White
605104	<input checked="" type="radio"/> Pneumatic Actuators hand operated Polished chrome

FOOT CONTROL FLOOR *

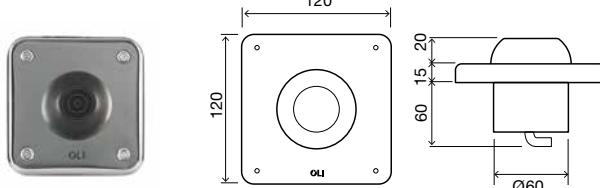

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- Floor installation;
- Anti-sliding push button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.

Included


- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm.



CÓD DESCRIPTION

605201	<input checked="" type="radio"/> Pneumatic actuator foot operated floor mounted
--------	---

FOOT CONTROL WALL *

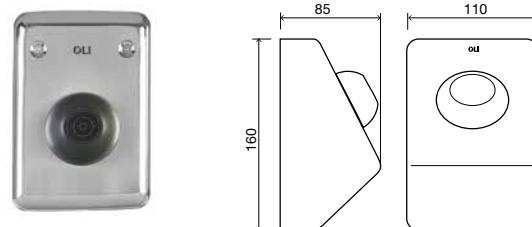

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- Wall installation;
- Anti-sliding push button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm.




CÓD DESCRIPTION

605301	<input checked="" type="radio"/> Pneumatic actuator foot operated wall mounted
--------	--

* Not meant to be used in the opening of the in-wall cistern. An inspection plate (code 207892) should be applied to ensure access to the cistern. Pre-installation necessary.

measurements are in mm

DOUBLE OUTLET BEND

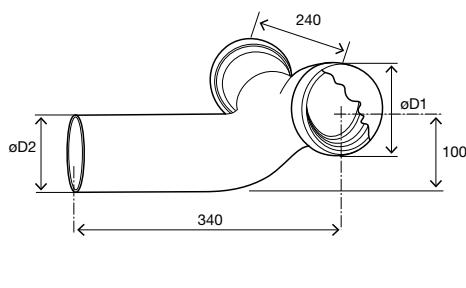


- Double outlet bend for wall-hung WC pans horizontal installation.

CÓD DESCRIPTION

622022 Double HPDE WC outlet bend D1 - Ø90, D2 - Ø110

WC OUTLET BEND



- WC outlet bend for wall-hung WC pans.

CÓD DESCRIPTION

036888 PP WC outlet bend L - 340, D1 - Ø90, D2 - Ø90


622002 HPDE WC outlet bend L - 300, D1 - Ø90, D2 - Ø110

622003 HPDE WC outlet bend L - 300, D1 - Ø110, D2 - Ø110

622004 HPDE WC outlet bend L - 230, D1 - Ø90, D2 - Ø100



622005 HPDE WC outlet bend L - 230, D1 - Ø110, D2 - Ø100

DOUBLE OUTLET BEND

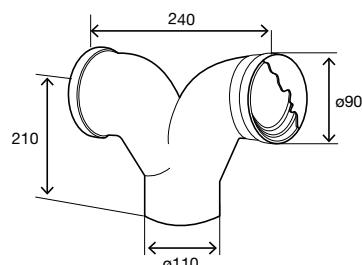

- Double outlet bend for wall-hung WC pans.

FLEXIBLE OUTLET WC





CÓD DESCRIPTION

622017 Double HPDE WC outlet bend

CÓD DESCRIPTION

079929 Flexible outlet WC bend


SANITARBLOCK CORNER KIT




- Compatible with 1150/1130mm sanitarblock frames.

CÓD	DESCRIPTION
719183	Sanitarblock Corner Kit

PNEUMATIC PIPE

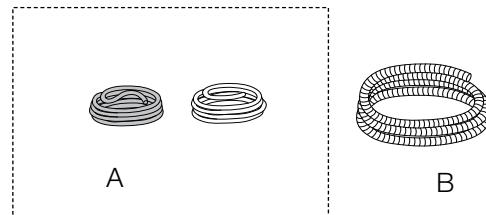


FLOW RATE REDUCER FOR OLI IN-WALL CISTERNS




- Compatible with OLI74 PLUS, EXPERT PLUS and OLI80.

CÓD	DESCRIPTION
014874	Flow rate reducer for OLI In-Wall cisterns

HORIZONTAL OUTLET WC




TELESCOPIC CONNECTING PIPE

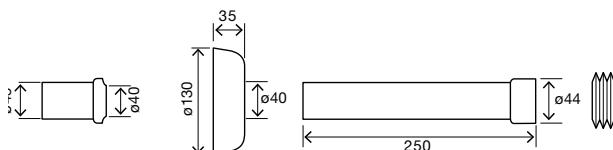

CÓD	DESCRIPTION
602501	Telescopic connecting pipe Ø45/40 x 130 White



PROTECTIVE CAPS



- Fixation nuts and washers with protective caps.

CÓD	DESCRIPTION
622301	Protective caps White
622303	Protective caps Polished chrome

FLEXIBLE FLUSH PIPE EXTENSION

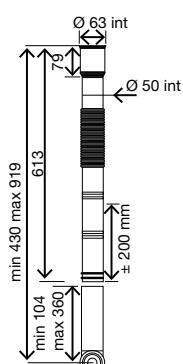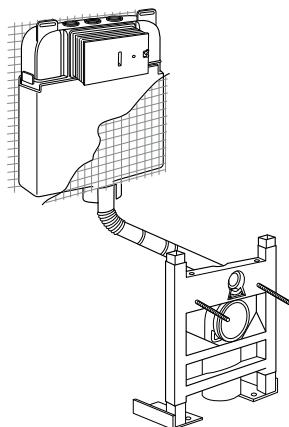


- Compatible with all OLI in-wall cisterns.

NOTE. For Expert PLUS and Quadra Plus cisterns an additional flush pipe (code 021266) is necessary.

CÓD DESCRIPTION

622401 Flexible flush pipe extension

SLEEVES FOR WALL-HUNG WC PAN

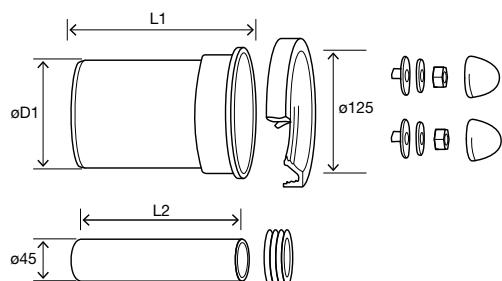

- Outlet pipe $\text{Ø}D1 \times \text{Ø}125 \times L1$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection WC pan pipe $\text{Ø}45 \times L2$;
- Rubber seal for WC pan $\text{Ø}45$;
- Fixing WC pan accessories (white).


CÓD DESCRIPTION

622501 Sleeves for wall-hung pan L1 – 250 L2 – 180, D1 – Ø90

622503 Sleeves for wall-hung pan L1 – 250, L2 – 180, D1 – Ø110

622523 Sleeves for wall-hung pan L1 – 300, L2 – 300, D1 – Ø110

LONGER SLEEVES FOR WALL-HUNG WC PAN

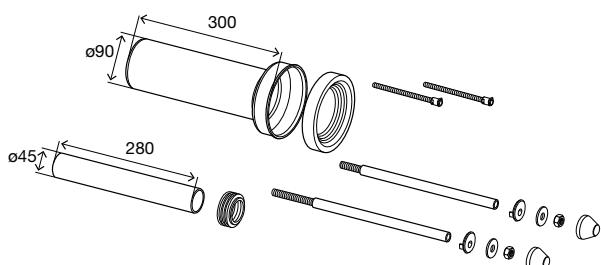

- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 300$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection WC pan pipe $\text{Ø}45 \times 280$;
- Rubber seal for WC pan $\text{Ø}45$;
- M12x300 rods for wall-hung fixation (x2);
- Fixing WC pan accessories (white).

LIFT-UP SUPPORT RAIL + TOILET ROLL HOLDER




CÓD DESCRIPTION

011229 Longer sleeves for wall-hung WC pan

CÓD DESCRIPTION

879143 Lift-up support rail + Toilet roll holder


S-BEND OUTLET

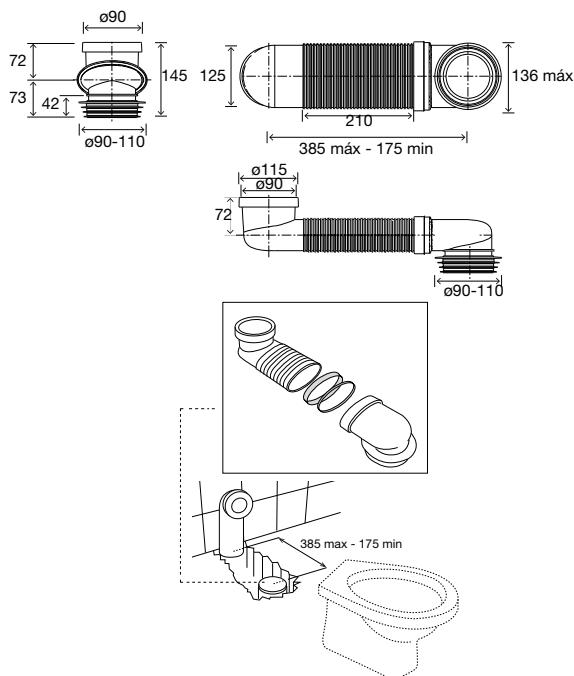

CÓD DESCRIPTION

108185 S-bend outlet


CONNECTING PIPES

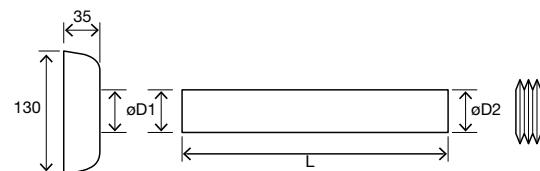

CÓD DESCRIPTION

602101 Connecting pipe L - 280, D1 - Ø130, D2 - Ø40, D3 - Ø40 White
 602001 Connecting pipe L - 280, D1 - Ø90, D2 - Ø30, D3 - Ø32 White
 602201 Connecting pipe L - 280, D1 - Ø90, D2 - Ø45, D3 - Ø45 White
 602301 Connecting pipe L - 500, D1 - Ø90, D2 - Ø40, D3 - Ø40 White

ACOUSTIC INSULATION FOR WALL-HUNG PAN AND BIDET

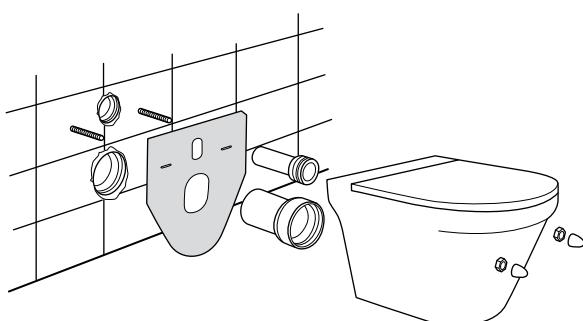


- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the sanitaryware and the tile.

CÓD DESCRIPTION

620071 Acoustic insulation for wall-hung pan and bidet

ACOUSTIC INSULATION FOR WALL-HUNG WASHBASIN

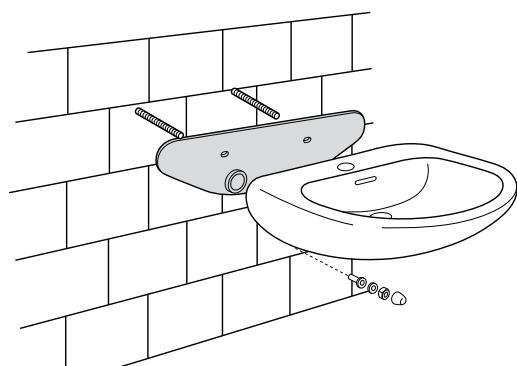

- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the sanitaryware and the tile.

CÓD DESCRIPTION


620072 Acoustic insulation for wall-hung washbasin

EXPOSED FLUSH CISTERNS


These flush cisterns are made with bright thermoplastic material with an elevated resistance to knocks and scratches. Some models are accessible in a wide range of colours, as well as the traditional

bright white. They are available in three different versions: close-coupled; medium to low position and high position.


OLI exposed cisterns are equipped with a fast and silent float valve with different water connection possibilities. Close-coupled version (fitted directly onto the ceramic pan) is ideal for the replacement of ceramic cisterns.




Close-coupled
Directly on the pan



Medium-low position
Directly on the wall




High position
Directly on the wall complemented
by a lever/puller

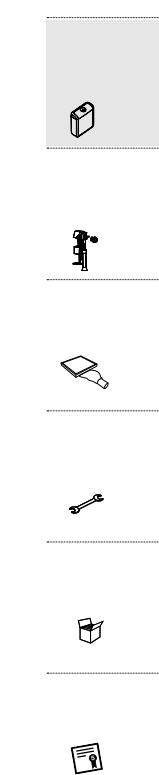

QUARZO

Medium-low Position

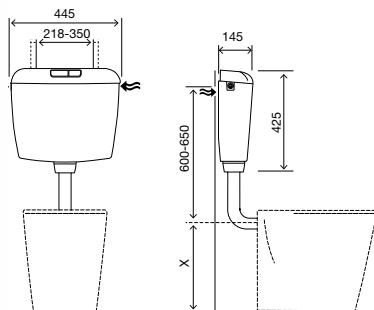

- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve (NF Class I);
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions*;
- Other versions compliant with: EN 14055 CL1 class "A" for the Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.



CÓD DESCRIPTION

124427 QUARZO

154961 QUARZO OLipure


OLipure the right
solution for a perfect
hygiene in the bathroom.

Internal system that pumps cleaning liquid in each flush. This way the cleaning liquid is always in a closed circuit, unlike traditional cleaning tablets that are always in contact with water, causing possible damages in the cisterns components.



- Easy, fast and simple refilling of the cleaning liquid, through a small opening on the side of the cistern.


- Universal - Compatible with every WC liquid cleaning product;
- Long lasting, 450ml maximum capacity.

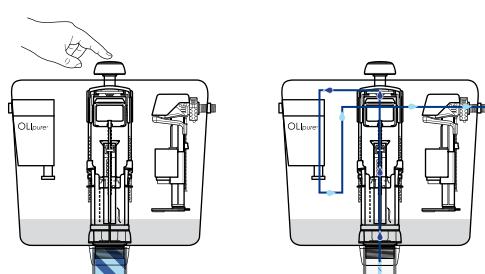

* For the water connection to the back position, a bended connection pipe or flexible hose it's needed

TOPAZIO DD

Medium-low Position

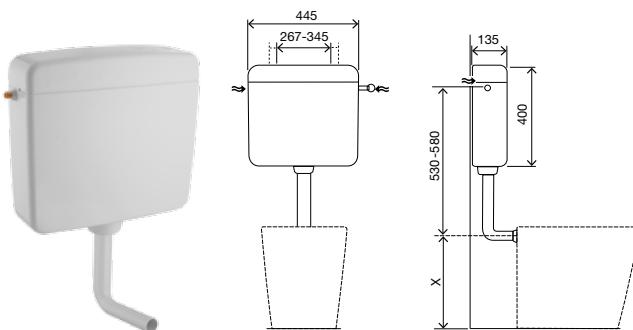

NOTE. Different colors available upon request.



CÓD DESCRIPTION

416201 TOPAZIO DD with 1/2" stop valve

416501 TOPAZIO DD


- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve (NF Class I);
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- Other versions compliant with: KIWA:
- EN 14055 CL1;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included

- Flush pipe Ø50/40;
- Wall fixation accessories;
- WC pan connection rubber seal.

ONIX PLUS

Medium-low application or close couple application

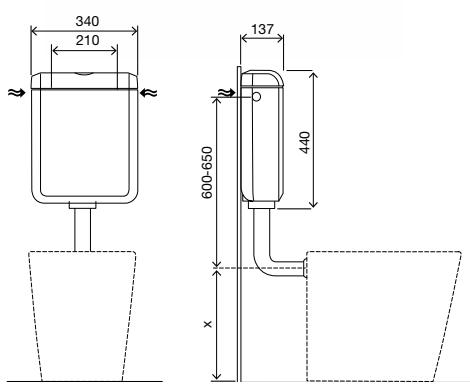


Medium-low application

- Dual flush 6/3 litres (adjustable to 4/2 litres in the outlet valve);
- Medium/low level installation or close couple;
- Acoustic and anti-condensation internal lining;
- Delayed refilling - Azor plus inlet valve;
- Silent inlet valve (NF Class I);
- 137mm thick;
- Water supply connections - Three positions;*
- Other versions compliant with: KIWA;
- EN 14055 CL1;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included

- Close-couple fixation kit for close couple installation;
- Flush pipe Ø50/40 for medium-low level installation;
- Wall fixation accessories;
- WC pan connection rubber seal.

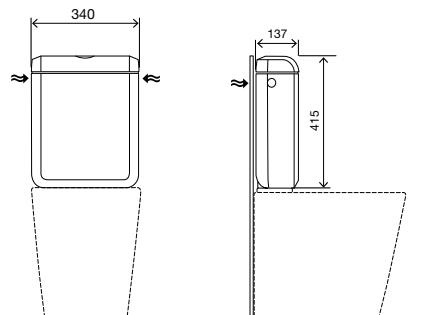


Close couple application



SAVES UP TO 9L
OF WATER PER DAY

CÓD DESCRIPTION

340221 ONIX PLUS 2 in 1



The cistern application allows an easy adjustment. Other versions compliant with: the WC pan fixation holes


measurements are in mm

127

* For the water connection to the back position, a bended connection pipe or flexible hose it's needed

ZAFFIRO DD

Close-coupled

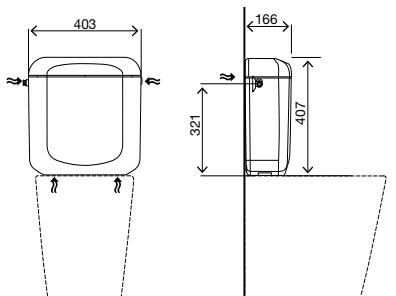

- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Close couple installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve (NF Class I);
- 166mm thick;
- Water supply connections - Three positions;*
- Other versions compliant with: KIWA;
- EN 14055 CL1;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included

- Close-couple fixation kit.



NOTE. Different colors available upon request.




CÓD DESCRIPTION

425201 ○ ZAFFIRO DD with 1/2" stop valve

425501 ○ ZAFFIRO DD


002426 ○ ZAFFIRO DD bottom connection



The cistern application allows an easy adjustment Other versions compliant with: the WC pan fixation holes

TURCHESE

high position

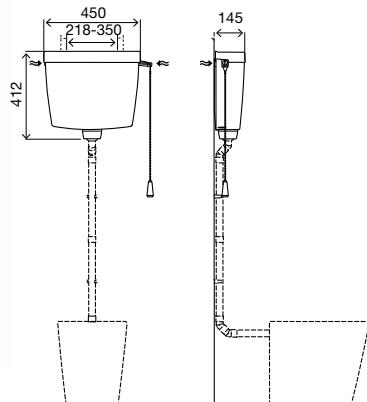

- High level exposed tank with single flush 6 litres (adjustable to 9 litres in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve (NF Class I);
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- Compatible with Ø32 flush pipes;
- Pneumatic version available (push buttons Page 119);
- EN 14055 CL1;
- White PS material;
- 5 year warranty.

Included

- Chain for high level installation;
- Wall fixation accessories;
- WC pan connection rubber seal Ø32.



CÓD DESCRIPTION


440201 ○ TURCHESE with 1/2" stop valve

440051 ○ TURCHESE

440881 ○ TURCHESE Pneumatic version

SMERALDO

high position

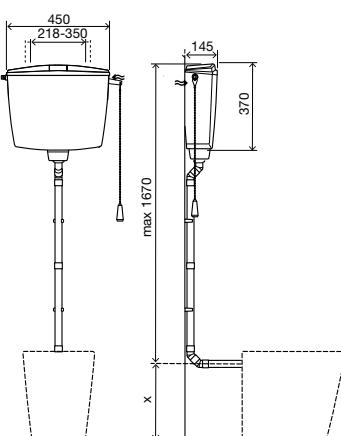

CÓD DESCRIPTION

027870 SMERALDO high position


- High level exposed tank with single flush 6 litres (adjustable to 9 litres in the inlet valve);
- Actuation in the push button (frontal) or pulling a chain;
- High/Medium/low level installation;
- Silent inlet valve (NF Class I);
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- bEN 14055 CL1;
- White PS material;
- 5 year warranty.

Included

- Chain for high level installation;
- 4 modular flush pipes Ø32;
- Wall fixation accessories;
- WC pan connection rubber seal Ø32.

OLISTYLE

high position

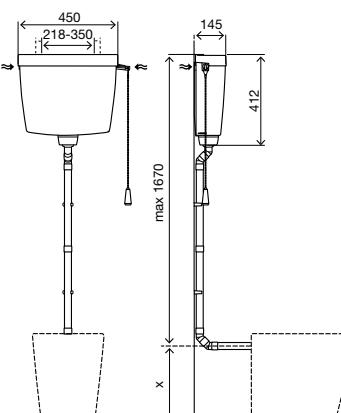

CÓD DESCRIPTION

440141 OLISTYLE


- High level exposed tank with single flush 9 litres (adjustable to 6 litres in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- EN 14055 CL1;
- White PS material;
- 5 year warranty.

Included

- Chain for high level installation;
- 4 modular flush pipes Ø32;
- Wall fixation accessories;
- WC pan connection rubber seal Ø32.

TOPAZIO

high position

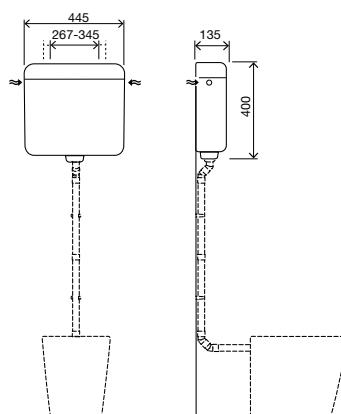

CÓD DESCRIPTION

413781 TOPAZIO Pneu high with 1/2" stop valve

- High level exposed tank with single flush 9 litres (adjustable to 6 litres in the inlet valve);
- Actuation in the Lid push button or pneumatic button (pneumatic push buttons Page 119);
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve (NF Class I);
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- EN 14055 CL1;
- White PS material;
- 5 year warranty.

Included

- Wall fixation accessories.

* For the water connection to the back position, a bended connection pipe or flexible hose it's needed

FEATURES TABLE



QUARZO



ONIX PLUS



TOPAZIO DD



Dual Flush



Start/Stop



Single Flush



Medium-low position



Close coupled position



High position



Pneumatic version



Silent inlet valve



Anti-condensation lining



kiwa



TOPAZIO



ZAFFIRO



TURCHESE

SMERALDO
High position

OLISTYLE



Without flush
pipe




Without flush
pipe




ACCESSORIES

FLUSH PIPE
Ø50/32 15°

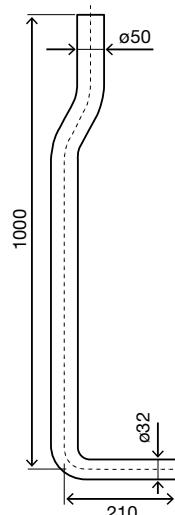


A

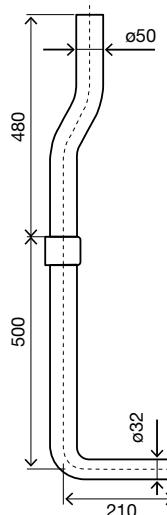

B


FLUSH PIPE
Ø32



Code	Description
490601	A - Flush pipe for medium/high cisterns - White
490501	B - Flush pipe for medium/high cisterns - White


Code	Description
490701	Modular flush pipe for high cisterns - White

FLUSH PIPE
Medium/high

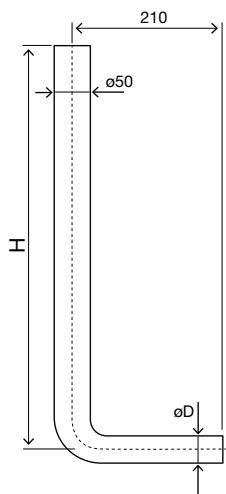

Code	Description
490301	FLUSH PIPE H - 600, D - Ø32 - White
490318	FLUSH PIPE H - 600, D - Ø40 - White
490401	FLUSH PIPE H - 1000, D - Ø32 - White



FLUSH PIPE
Medium/low



Code	Description
490001	FLUSH PIPE L - 210, D - Ø32 - White
490101	FLUSH PIPE L - 210, D - Ø40 - White
490130	FLUSH PIPE L - 350, D - Ø40 - White

MODULAR FLUSH PIPE

FLUSH BEND FOR HIGH POSITION CISTERNS




Included

- 5 flush pipes Ø32;
- 3 flush pipe bends Ø32;
- Flush pipe bend connection Ø32/50;
- Flush pipe support with fixation screw.

Code	Description
490881	Modular flush pipes for high/medium/low level cisterns - White

Code	Description
490751	Flush bend - White

TOPAZIO PNEUMATIC KIT

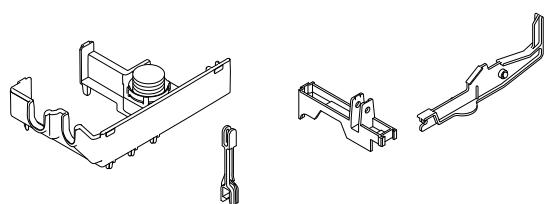

Code	Description
087617	TOPAZIO Pneumatic kit

UNIVERSAL MECHANISMS

Universal inlet and outlet
valves for ceramic cisterns

Easy and quick installation

OLI is a leading European producer of mechanisms for ceramic cisterns and its quality is recognized by the most important international bodies. The extremely silent inlet valves and the elevated performance levels of our outlet valves are tested under strict laboratory conditions before being introduced to the market.

OLI mechanisms are also available in "blister" packs and are the best solution for consumer self-service areas. Designed with the final consumer in mind, the product is easy to identify.



Inlet valve

- Side, left and right, or bottom water supply;
- Silent;
- Delayed refill saves up to 9 litres of water per day.




Outlet valve

- Single or dual flush;
- Different actuation systems;
- Top or frontal application, pull or push for different models.



IVC 102 PLUS


Inlet valve

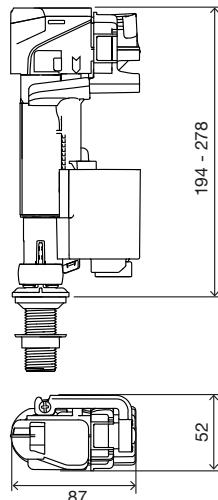


SAVES UP TO **9L**
OF WATER PER DAY

- Delayed refilling inlet vale: it starts after the outlet valve is in the close position;
- Bottom inlet valve with 1/2" brass (also available in plastic) or 15/16 in plastic connection;
- Height is adjustable;
- Easy to install;
- Easy maintenance;
- Silent inlet valve;
- Integrated filter can be cleaned;
- Reduced dimensions;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.5-6bar;
- Maximum static pressure: 16bar;
- Anti-backflow function;
- Quick filling;
- 10 year warranty.

INLET VALVE IN
CLOSED POSITION



OPERATION MODE
DUAL FLUSH

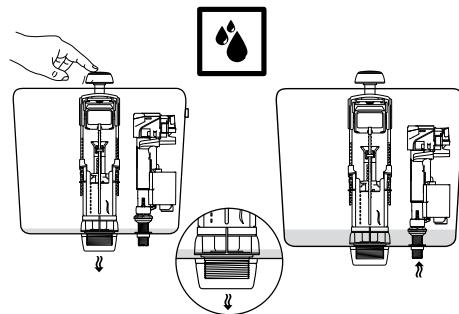

CÓD DESCRIPTION

878736 IVC 102 PLUS 1/2 brass - box

878735 IVC 102 PLUS 15/16 plastic - box

879284 IVC 102 PLUS 1/2 plastic - box

878738 IVC 102 PLUS 1/2 brass - bag



878737 IVC 102 PLUS 15/16 plastic - bag

879285 IVC 102 PLUS 1/2 plastic- bag

The IVC102 inlet valve, with his delayed opening system, only opens the water after the flush valve closes. This system allows a water saving up to 0.5 liters in average in each full flush, resulting in a daily average saving of 9 liters.

AZOR PLUS

Inlet valve

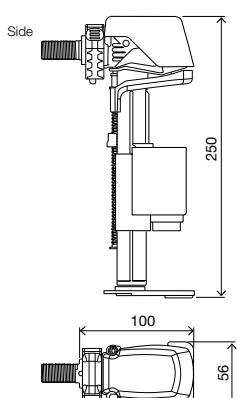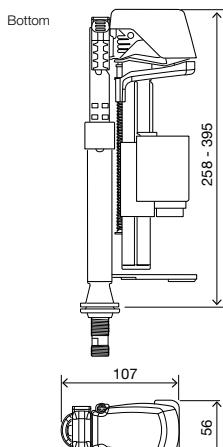

SAVES UP TO **9L**
OF WATER PER DAY

- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Side and bottom water supply connection;
- Adjustable height in the bottom connection;
- Easy to install;
- Reduced dimensions;
- Side and bottom inlet valve, with 3/8" brass connection (also available in plastic or 1/2" plastic or brass);
- Counter pressure closing system (Hydraulic);
- Dynamic pressure functioning range: 0.1 – 14 bar;
- Maximum static pressure: 20 bar;
- Silent valve, NF class I certified;
- Easy maintenance without the need to disconnect from the water connection;
- Anti-Backflow function;
- Other versions compliant with: WRAS (bottom/side version), NF, KIWA and DVGW, UPC (side version);
- 10 year warranty.




CÓD DESCRIPTION

564100 AZOR PLUS side 3/8" brass - box

564102 AZOR PLUS bottom 3/8" brass - box

IVC100

Inlet valve

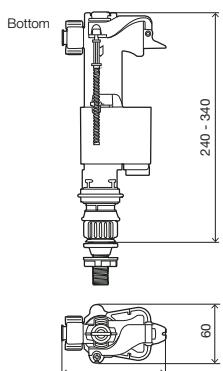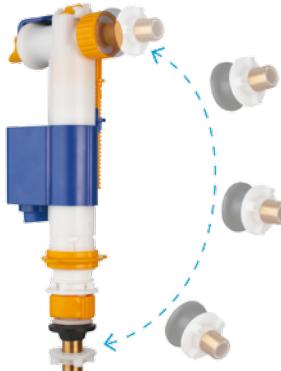

CÓD DESCRIPTION

099936 IVC100 3/8" brass - box

099935 IVC100 3/8" brass - bag



- Side and bottom water supply connection in the same inlet valve;
- Reduced dimensions;

- Side and bottom inlet valve, with 3/8" brass;
- Adjustable height in the bottom connection;
- Easy to install;
- Counter pressure closing system (Hydraulic);
- Silent valve;
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- Easy maintenance no need to disconnect water connection;
- Integrated filter that can be cleaned without removing the water connection;
- Anti-Backflow function;
- 10 year warranty.



AZOR SILENT

Inlet valve

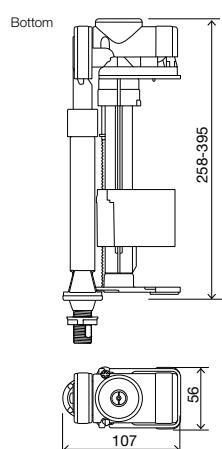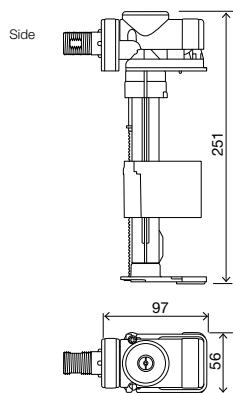


CÓD DESCRIPTION

002437 AZOR SILENT side/bottom 3/8" brass - blister

COMPACT

Side inlet valve

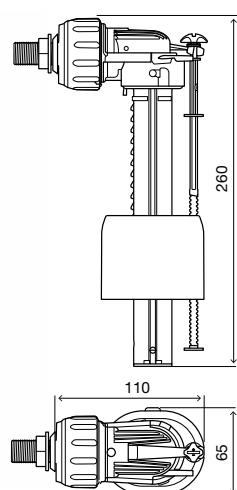

CÓD DESCRIPTION

561460 COMPACT 3/8" brass - box


561598 COMPACT 3/8" brass - bag

- Silent inlet valve <6dB, NF class I certified;
- Side and bottom water supply connection in the same inlet valve;
- Height is adjustable with the bottom connection;
- Easy to install;
- Reduced dimensions;
- Side and bottom inlet valve, with 3/8" brass connection (also available in plastic or 1/2" plastic or brass);
- Counter pressure closing system (Hydraulic);
- Dynamic pressure functioning range: 0.1 – 14 bar;
- Maximum static pressure: 20 bar;
- Easy maintenance without the need to disconnect from the water connection;
- Anti-Backflow function;
- Other versions compliant with: NF (side version in brass connection);
- 10 year warranty.

- Side inlet valve, with 3/8" brass connection (also available in plastic or 1/2" plastic or brass);
- Reduced dimensions;
- Counter pressure closing system (Hydraulic);
- Silent valve, NF class I certified;
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Other versions compliant with: NF and KIWA;
- 10 year warranty.

JOLLY UNI

Side inlet valve

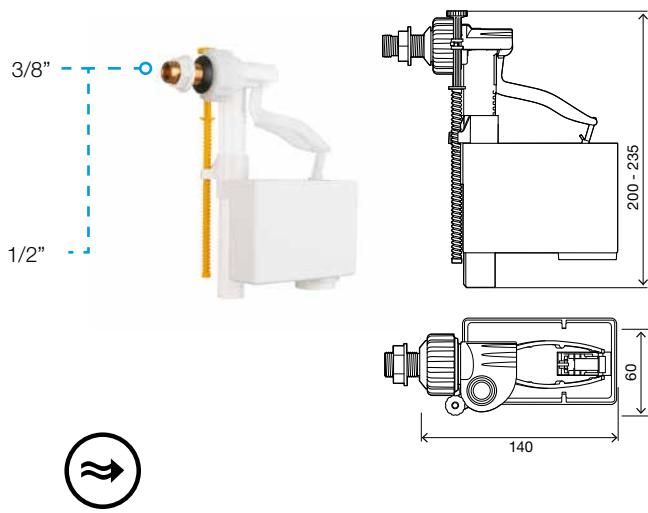


- Side inlet valve, with 3/8" or 1/2" brass connection (also available in plastic);
- Piston closing system (Mechanical);
- Silent valve, NF class I certified;
- Dynamic pressure functioning range: 0.5 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Other versions compliant with: NF and KIWA;
- 10 year warranty.

CÓD DESCRIPTION

560160	JOLLY UNI 3/8" brass - box
560170	JOLLY UNI 1/2" brass - box
044993	JOLLY UNI 3/8" brass - bag
044992	JOLLY UNI 1/2" brass - bag

UNI BOTTOM

Bottom inlet valve

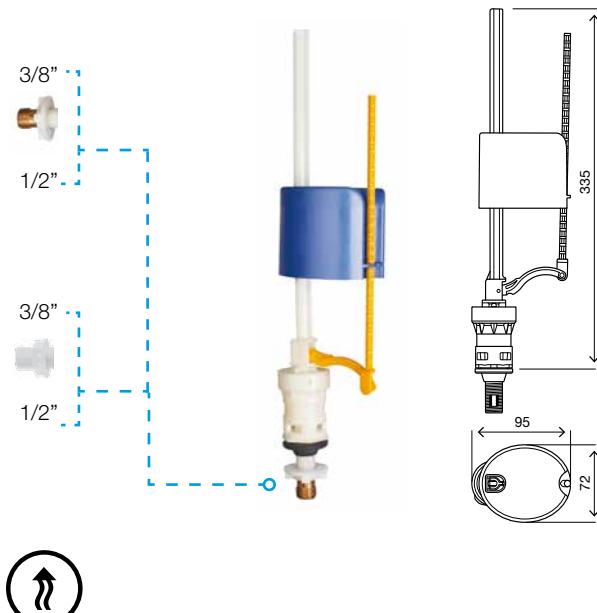

- Bottom inlet valve, with 3/8" or 1/2" in brass or plastic connection;
- Piston closing system (Mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar;
- 10 year warranty.

* Refill Version

NOTE. Mechanical anti-Backflow function available upon request.

CÓD DESCRIPTION


562160	UNI BOTTOM 3/8" brass - box
562176	UNI BOTTOM 3/8" plastic - box
562161	UNI BOTTOM 1/2" brass - box
562163	UNI BOTTOM 1/2" plastic - box
092329	UNI BOTTOM refill* 1/2" plastic - box

CÓD DESCRIPTION

563571	UNI BOTTOM 3/8" plastic - bag
022371	UNI BOTTOM 1/2" brass - bag
044995	UNI BOTTOM 1/2" plastic - bag
563594	UNI BOTTOM 1/2" plastic - bag

ATLAS CABLE

Outlet Valve

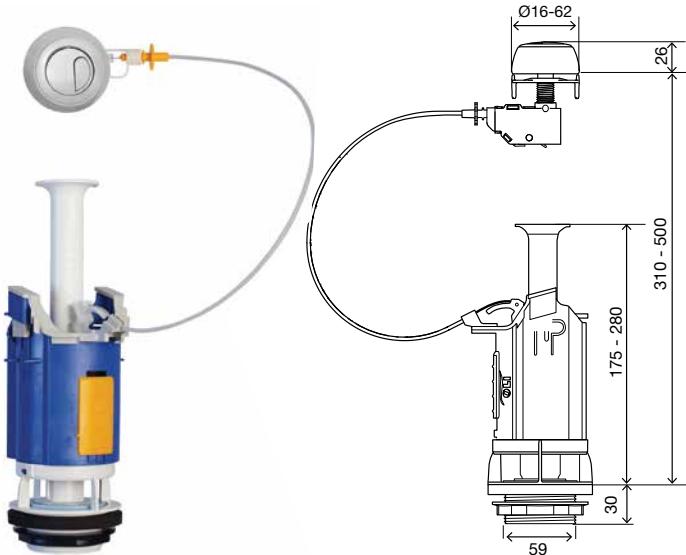

CÓD DESCRIPTION

501120 ATLAS CABLE - box

022369 ATLAS CABLE - bag

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal and flexible application (front, top or side push button position);
- Cable actuation < 20 N;
- High flow rate flush;
- Damping system - silent operation;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance (bayonet system);
- Silicone seal;
- Other versions compliant with: NF;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



EASY ADJUSTMENT OF THE OVERFLOW PIPE



Universal adjustment Other versions compliant with: the desired water level in different ceramic tanks with a telescopic overflow pipe.



EASY ADJUSTMENT OF THE FLUSH VOLUME




Residual adjustment of the complete flush
Slide the residual adjustment lever up and reduce the volume of the flush.



Residual adjustment of the half flush
Atlas allows you to adjust the half flush volume separately.

ATLAS

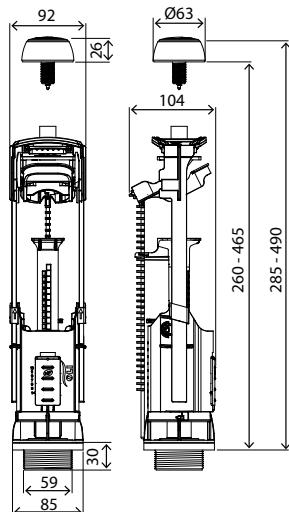

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Allows the decentralization of the button on the ceramic lid (25mm on each axis);
- Mechanical actuation <20N;
- High flow rate flush;
- Damping system - silent operation;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy maintenance (bayonet system);
- Silicone seal;
- Other versions compliant with: NF, WRAS, SAI, CQC and SIRIM;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



CÓD DESCRIPTION

501121 ⚒ ATLAS - box


011967 ⚒ ATLAS - bag



← Decentralization of the button in the ceramics lid →

25mm

FAST START/STOP



- Single flush outlet valve with start/stop system;
- Universal top push button position that locks the ceramic lid;
- Allows the decentralization of the button on the ceramic lid (20mm on one axis);
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø40mm;
- 2 adaptors.



START-STOP SYSTEM

CÓD DESCRIPTION

100019 ⚒ FAST START/STOP - box

088755 ⚒ FAST START/STOP - bag




← Decentralization of the button in the ceramics lid →

20mm

measurements are in mm

PUSH ECO

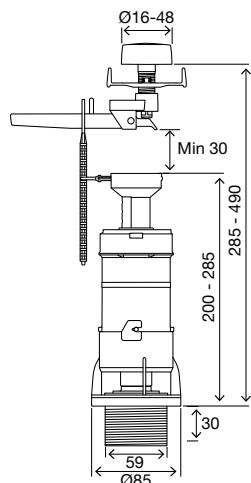

- Single flush outlet valve;
- Universal top push button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø40mm.




CÓD DESCRIPTION

501020 PUSH ECO - box

501021 PUSH ECO - bag

ECO TIRETTE



- Single flush outlet valve;
- Universal top pull button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Chrome pull button for cisterns with lid holes from Ø16 to Ø40mm.



CÓD DESCRIPTION

507572 ECO TIRETTE - box

500321 ECO TIRETTE - bag

HANDLE



- Single flush outlet valve;
- Universal front handle button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Chrome handle button for cisterns with Ø16 hole.




CÓD DESCRIPTION

501420 ⚒ HANDLE - box

PUSH ECO + ECO

Single flush mechanism kit, side connection

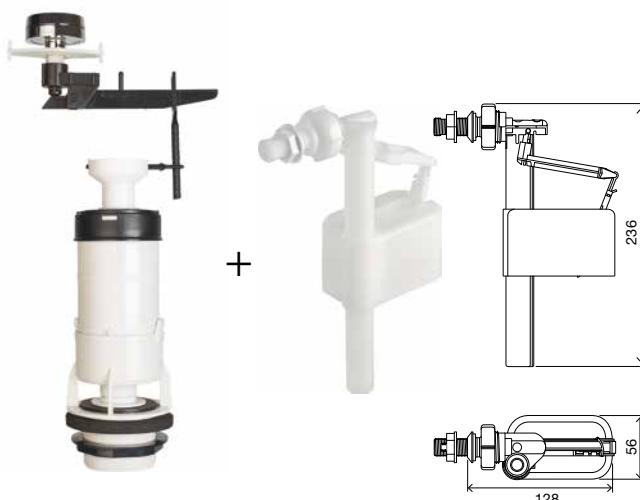

- Push Eco outlet valve (see Page 142);

Eco inlet valve:

- Side inlet valve, with 3/8" plastic connection;
- Piston closing system (Mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar;
- Anti-Backflow function;
- 10 year warranty.



CÓD DESCRIPTION

501023 ⚒ PUSH ECO + ECO - bag

PUSH ECO + UNI BOTTOM

Single flush mechanism kit, bottom connection



- Push Eco outlet valve (see Page 142);
- Uni Bottom inlet valve 3/8" plastic connection (see Page 139);
- 10 year warranty.

CÓD DESCRIPTION

501034 ⚒ PUSH ECO + UNI BOTTOM - bag

FAST START/STOP + COMPACT

Start/stop flush mechanism kit, side connection



- Fast Start/Stop outlet valve (see Page 141);
- Compact 3/8" inlet valve brass connection (see Page 138);
- 10 year warranty.

CÓD DESCRIPTION

100023 ⚒ FAST START/STOP + COMPACT - box

100022 ⚒ FAST START/STOP + COMPACT - bag

FAST START/STOP + UNI BOTTOM

Start/stop flush mechanism kit, bottom connection



- Fast Start/Stop outlet valve (see Page 141);
- Uni Bottom inlet valve 3/8" brass connection (see Page 139);
- 10 year warranty.


CÓD DESCRIPTION

100032 ⚒ FAST START/STOP + UNI BOTTOM - box

100031 ⚒ FAST START/STOP + UNI BOTTOM - bag

IVC 100 + ATLAS CABLE

Dual flush mechanism kit, side/bottom connection

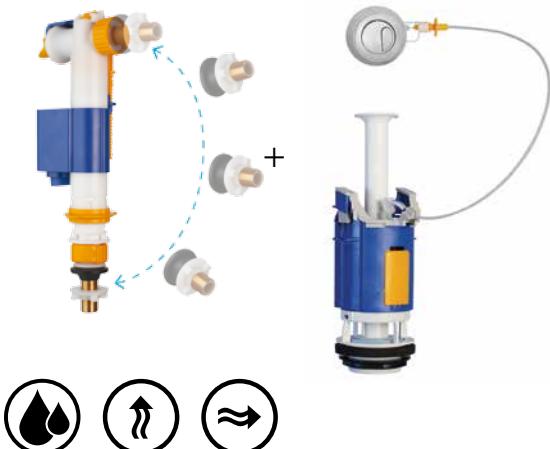

- Atlas cable outlet valve (see Page 140);
- IVC100 inlet valve brass connection (see Page 137);
- 10 year warranty.




CÓD DESCRIPTION

099938 IVC 100 + ATLAS CABLE - bag

099939 IVC 100 + ATLAS CABLE - box

OLIPURE KIT

Ceramic cisterns

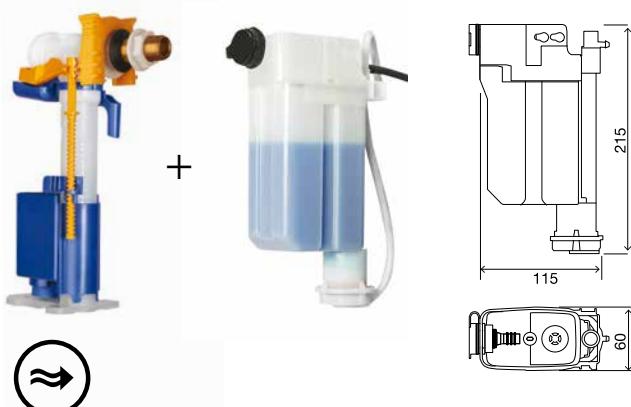

- Azor Plus side 3/8" brass connection
- OLIPure system;
- 350mm Refill connection pipe;
- 130mm Outlet valve connection pipe;
- Only suitable for ceramic cisterns with side connections;
- 10 year warranty.

CÓD DESCRIPTION

101768 OLIPure kit - box

ACCESSORIES

SIDE COVER



CÓD DESCRIPTION

493064 Side cover White

493065 Side cover Polished Chrome

BOTTOM COVER



CÓD DESCRIPTION

058025 Bottom cover

measurements are in mm

FEATURES TABLE



	AZOR PLUS	AZOR SILENT	IVC100	IVC102PLUS	COMPACT	JOLLY UNI	UNI BOTTOM
	●	●	●	●			
Bottom water supply							●
	●	●	●		●	●	
Side water supply							
Counter pressure closing system (Hydraulic);	●	●	●	●	●		
Piston closing system (Mechanical);					●	●	
Dual Flush							
Single flush							
Start/Stop							
Dimensions	258-360 (H) 107 x 56 (W x D)	255-360 (H) 107 x 56 (W x D)	240-340 (H) 98 x 60 (W x D)	194-278 (H) 87x52 (W x D)	255 (H) 110 x 65 (W x D)	200-235 (H) 140 x 64 (W x D)	335 (H) 95 x 72 (W x D)
	●	●			●	●	
	●				●	●	
		●*					
		●					
		●**					



Front/Side/Top



Top

Top

Top

Front

Top

310-500
(H)
92
(O)

285-500
(H)
92
(O)

310-425
(H)
92
(O)


290-490
(H)
85
(O)


334-444
(H)
85
(O)

200-310
(H)
85
(O)




FLOOR-EVEN SHOWERS

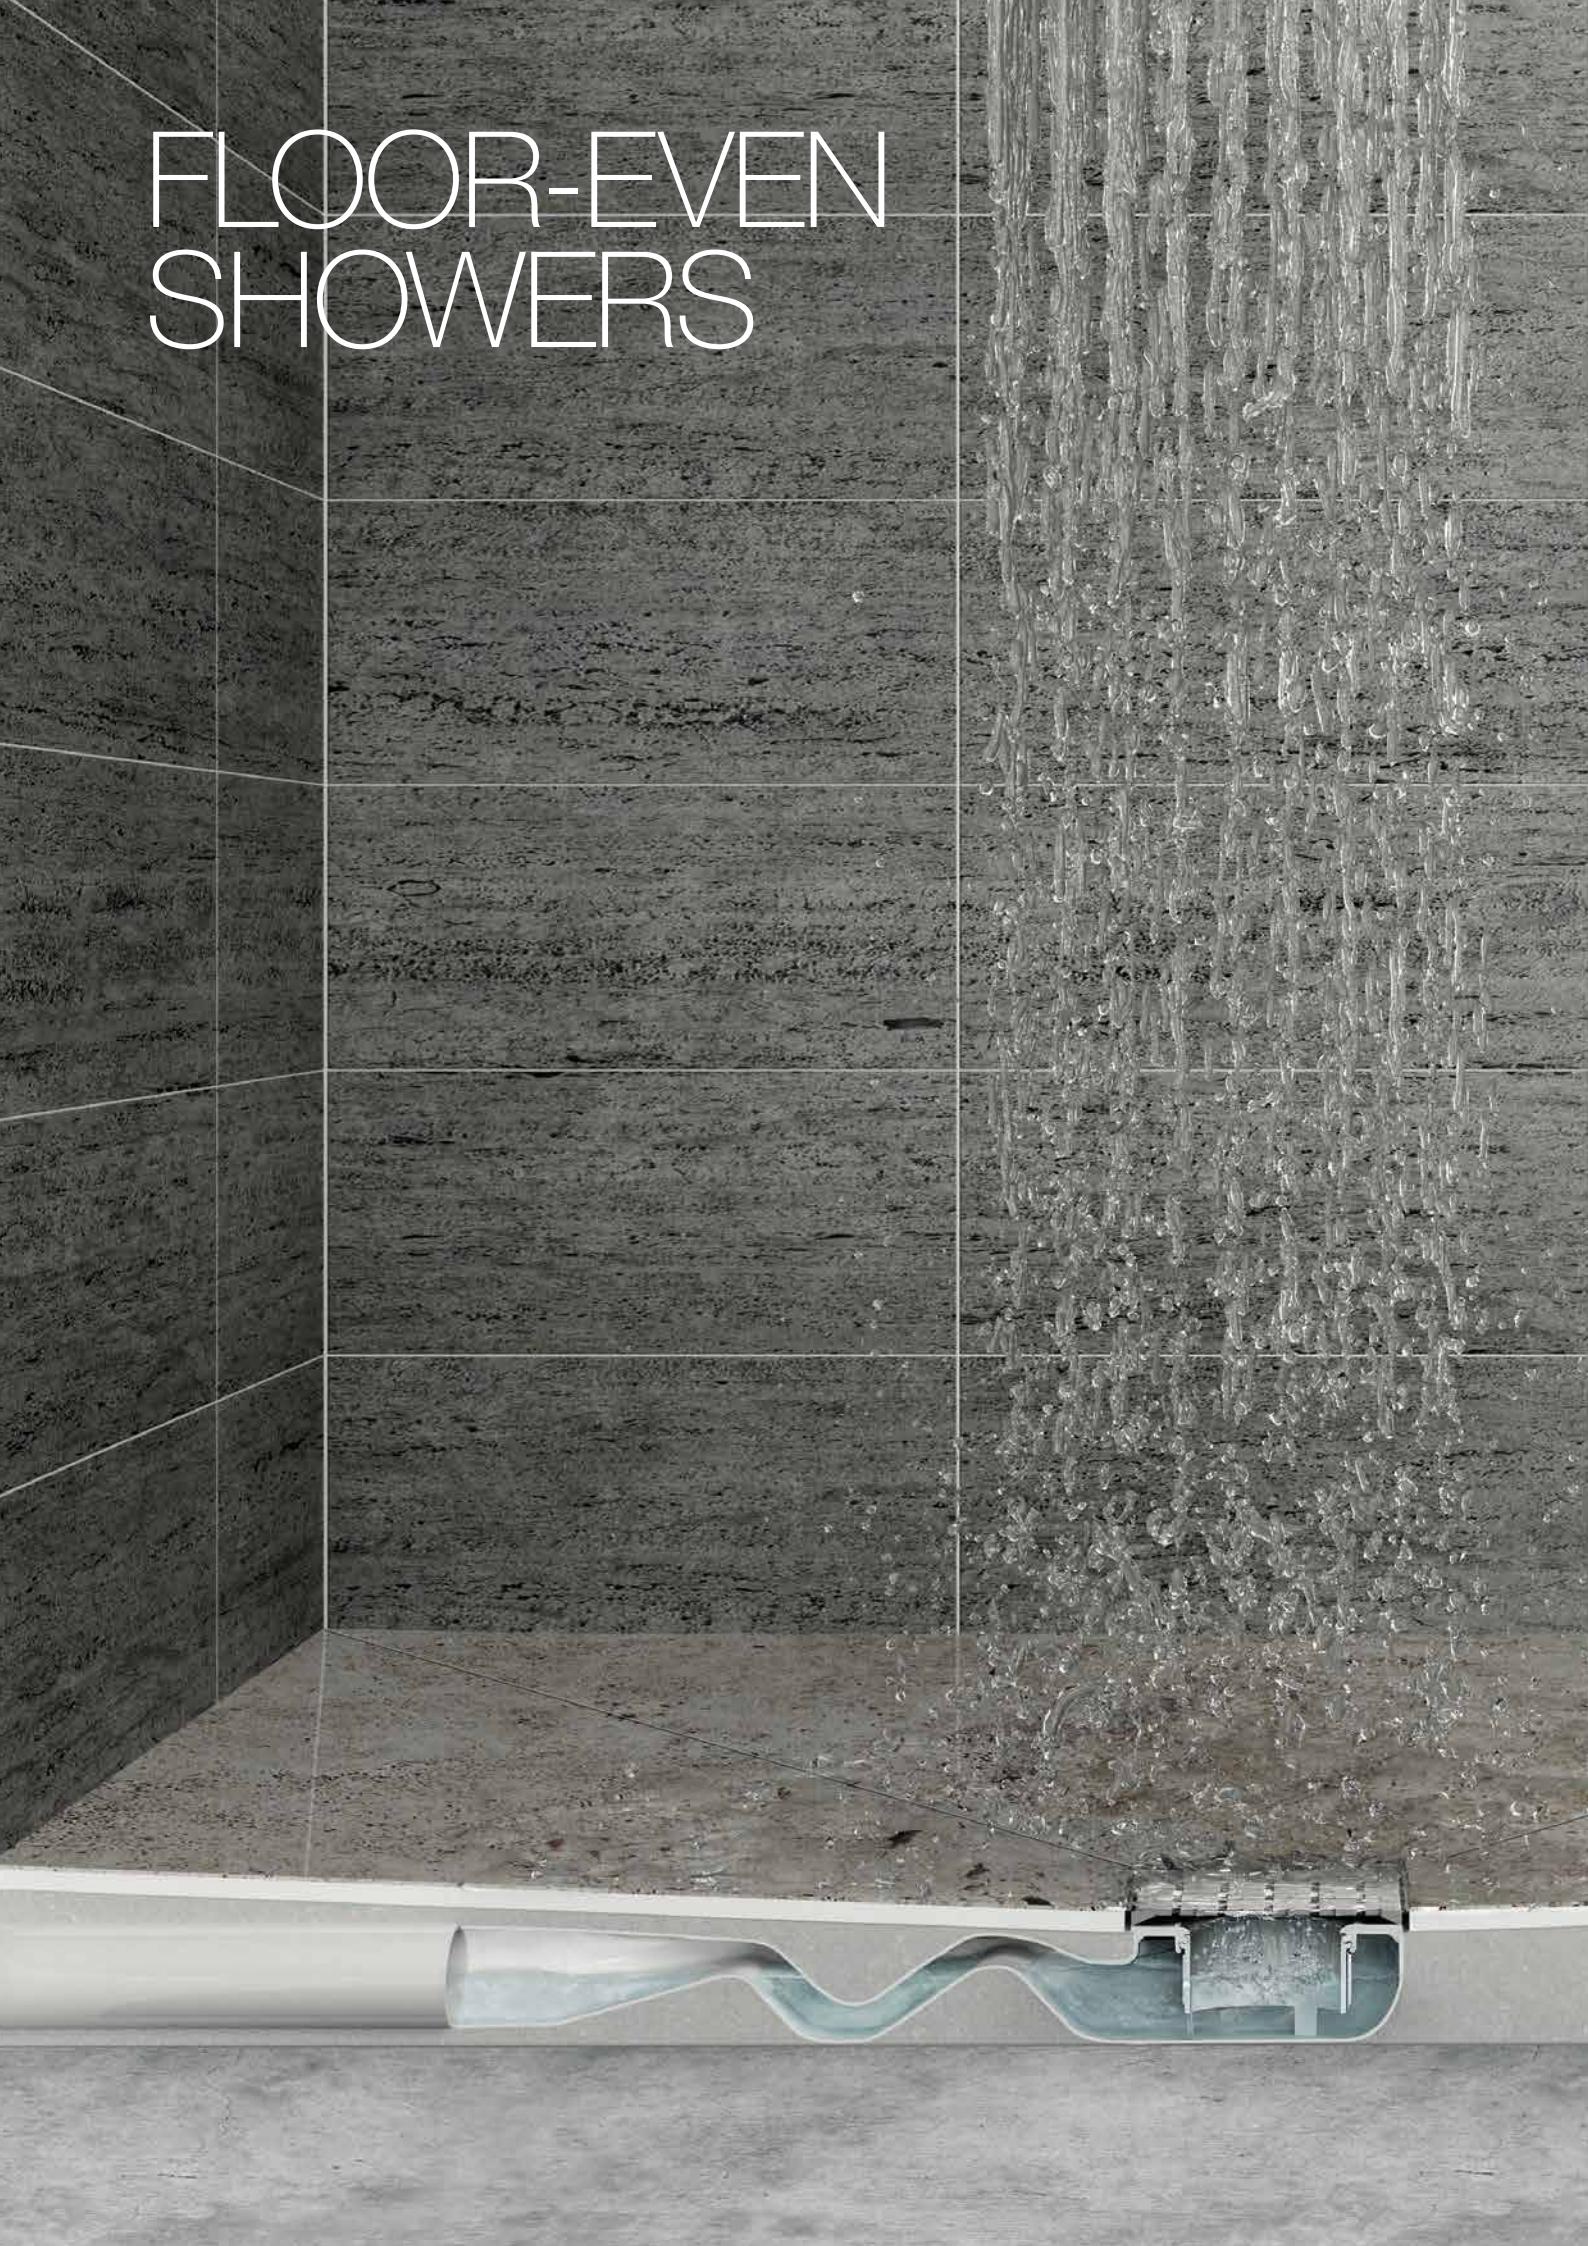

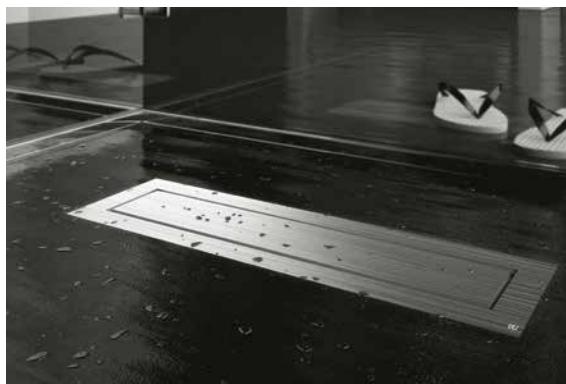


Shower systems built into the floor or wall allowing for greater ease of cleaning and design in your bathroom.



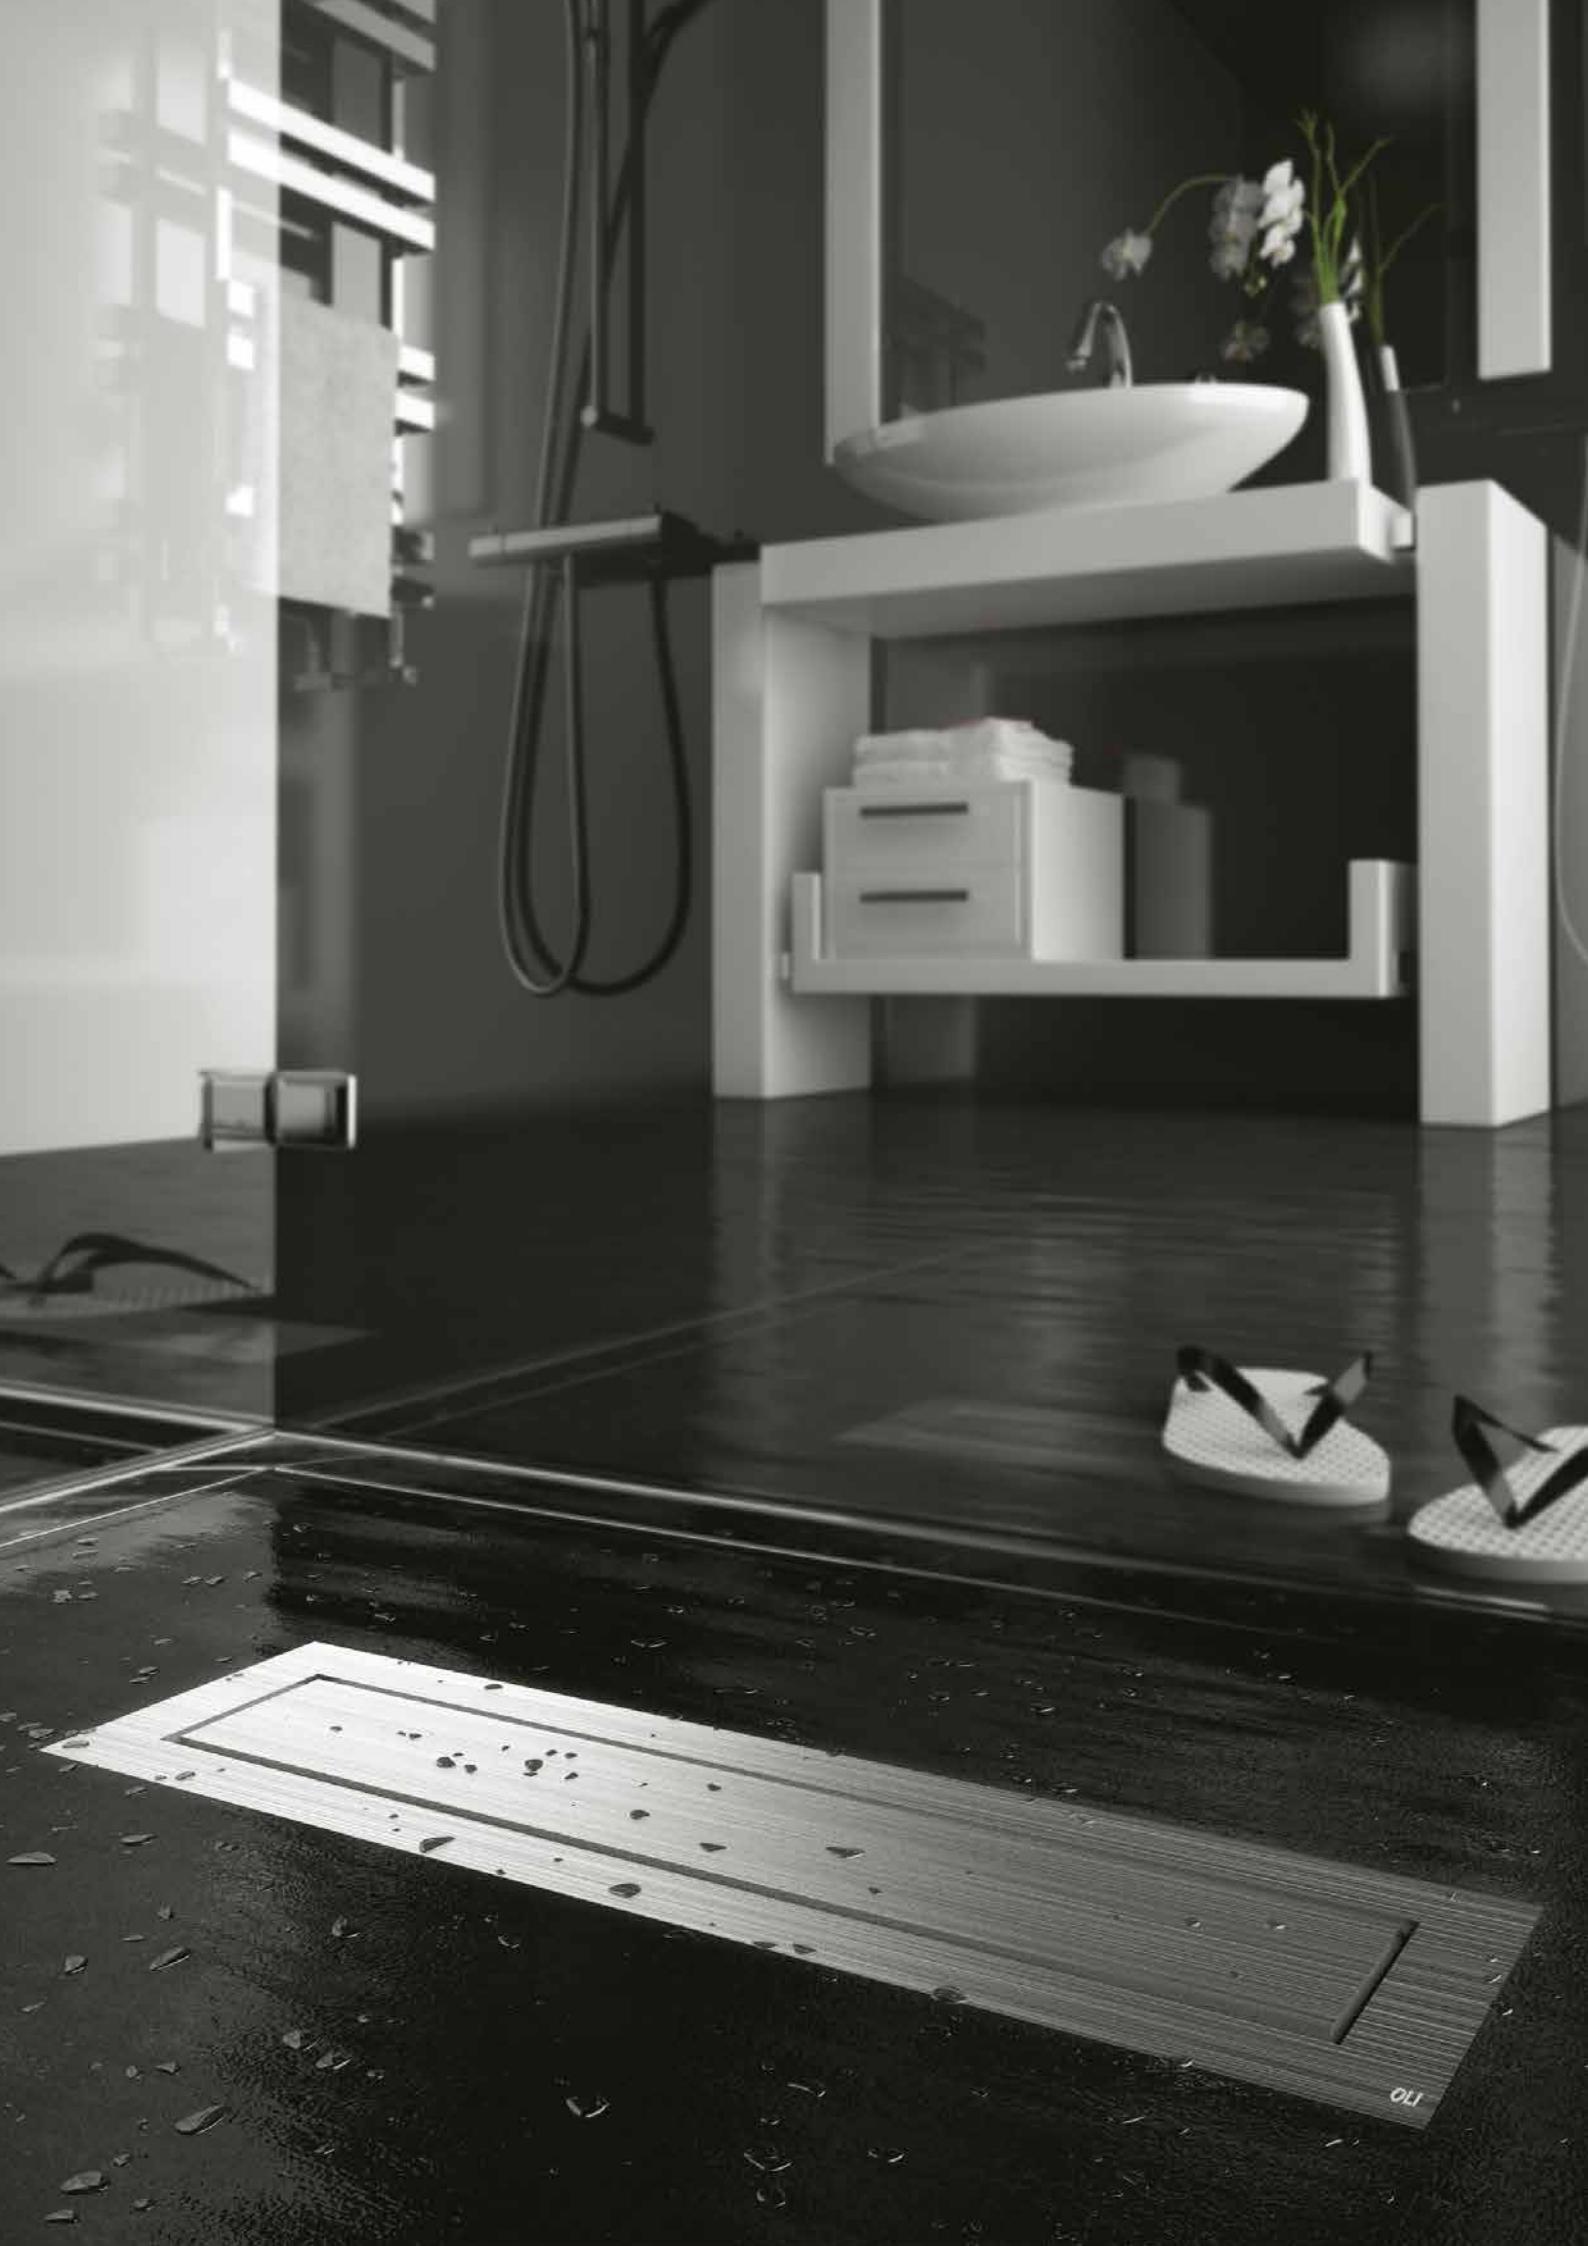

OLIFILo PREMIUM

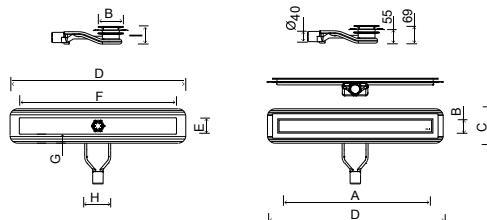

- Stainless steel body, grid with frame in stainless steel matt;
- Easy to install and maintain;
- Ideal for people with reduced mobility.


A	B	C	D	E	F	G	H	I
836	96	135	875	64	804	35	100	70
936	96	135	975	64	904	35	100	70



CÓD DESCRIPTION

- 300301 OLIFILo premium 80
 300303 OLIFILo premium 90
 300300 Support legs

OLIFILo STANDARD

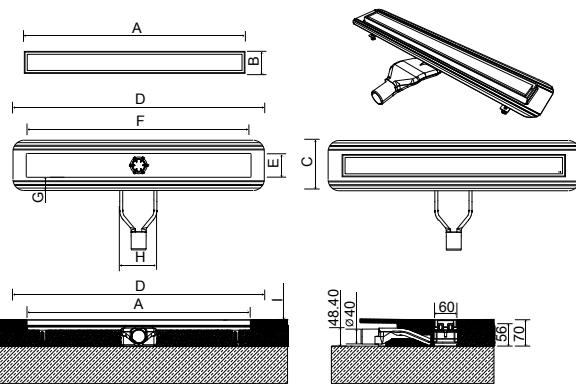

- Stainless steel body, smooth grid in stainless steel matt;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

A	B	C	D	E	F	G	H	I
700	60	135	775	64	704	35	100	70
800	60	135	875	64	804	35	100	70
900	60	135	975	64	904	35	100	70
1100	60	135	1175	64	1104	35	100	70



CÓD DESCRIPTION


- 300310 OLIFILo standard 70
 300312 OLIFILo standard 80
 300314 OLIFILo standard 90
 300316 OLIFILo standard 110
 300300 Support legs

measurements are in mm

OLIFILo CERAMIC



- Stainless steel body, grid for a ceramic finish;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

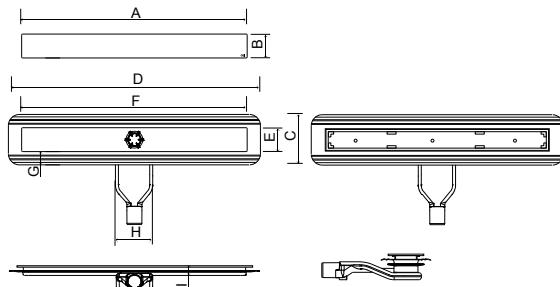

A	B	C	D	E	F	G	H	I
800	60	135	875	64	804	35	100	73




CÓD DESCRIPTION

300330	OLIFILo CERAMIC 80
300300	Support legs

OLIFILo BASIC



- Stainless steel body, grid in shiny stainless steel satin;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

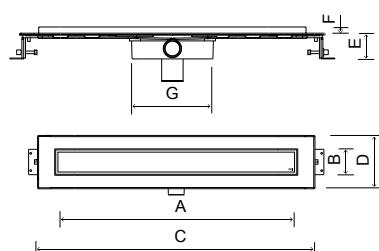

A	B	C	D	E	F	G	H	I
603	66	688	132	72	14	197	Ø40	Ø50
803	66	888	132	72	14	197	Ø40	Ø50



CÓD DESCRIPTION

300341	OLIFILo basic 40
300343	OLIFILo basic 50
300340	OLIFILo basic 60
300347	OLIFILo basic 70



CÓD DESCRIPTION

300342	OLIFILo basic 80
300345	OLIFILo basic 90
300346	OLIFILo basic 100

OLIFILo WALL



- Wall drain in stainless steel Matt;
- Easy to install and maintain;
- Ideal for people with reduced mobility.



A	B	C	D	E	F	G	H
386	85	386	65	304	33	57	145



Ø 40

CÓD DESCRIPTION



300350 OLIFILo wall 30

300300 Support legs


OLIFILo SQUARE



- Square siphon shower drain in stainless steel Matt 20x20;
- Easy to install and maintain;
- Ideal for people with reduced mobility.



A	B	C	D	E	F	G	H
100	200	200	98	20	63	43	48





CÓD DESCRIPTION

300360 OLIFILo square 20

measurements are in mm

OLIFILo CENTRO RIBASSATO

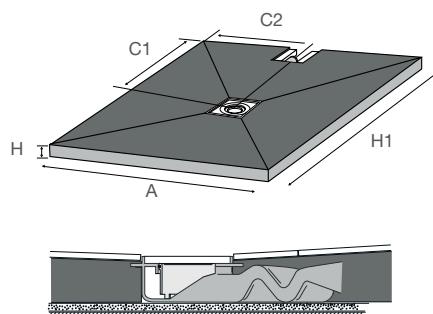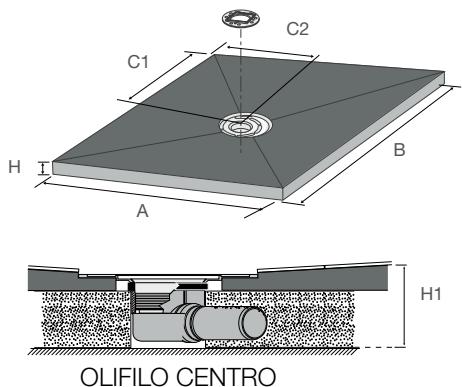

- Freedom of movement and maximum accessibility (Even for people with reduced mobility);
- The floor coating can be done with any commonly used materials;
- Water sealing and humidity insulation guaranteed;
- Easy installation and maintenance;
- Siphon accessible for cleaning;
- Choice of 4 different grates, each available in two finishes (chrome and matte).

A	B	C1	C2	H	H1*
800	800	400	400	45	130
900	900	450	450	45	130
1000	1000	500	500	50	130
1200	1200	600	600	50	130
1200	900	600	450	50	130
1400	900	700	450	45	130
1200	1200	600	600	70	70



CÓD DESCRIPTION


300001	OLIFILo centro 800X800
300003	OLIFILo centro 900X900
300005	OLIFILo centro 1000X1000
300007	OLIFILo centro 1200X1200
300009	OLIFILo centro 1200X900
300011	OLIFILo centro 1400X900
300051	OLIFILo centro ribassato 1200X1200

*H1- minimum height for application, excluding the final coating.

OLIFILO LATO



- Freedom of movement and maximum accessibility (Even for people with reduced mobility);
- The floor coating can be done with any commonly used materials;
- Water sealing and humidity insulation guaranteed;
- Easy installation and maintenance;
- Siphon accessible for cleaning;
- Choice of 2 different grates, each available in two finishes (chrome and matte).

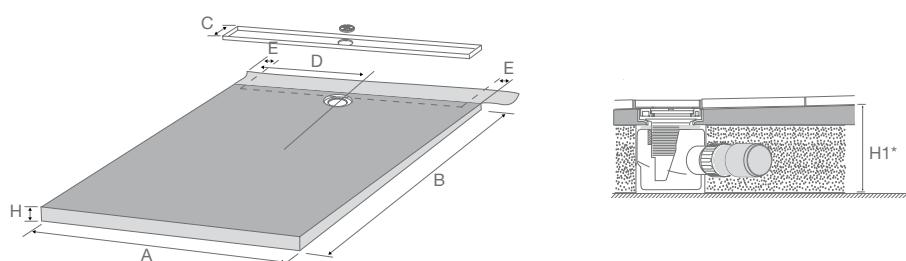

CÓD DESCRIPTION

300081 OLIFILO lato 900x1200


300083 OLIFILO lato 1000x1200

A	B	C	D	E	H	H1*
900	1200	80	450	65	50	140
1000	1200	80	500	115	50	140

OLIFILO BILATO



- Freedom of movement and maximum accessibility (Even for people with reduced mobility);
- The floor coating can be done with any commonly used materials;
- Water sealing and humidity insulation guaranteed;
- Easy installation and maintenance;
- Easy to clean thanks to special brush provided to access the siphon.

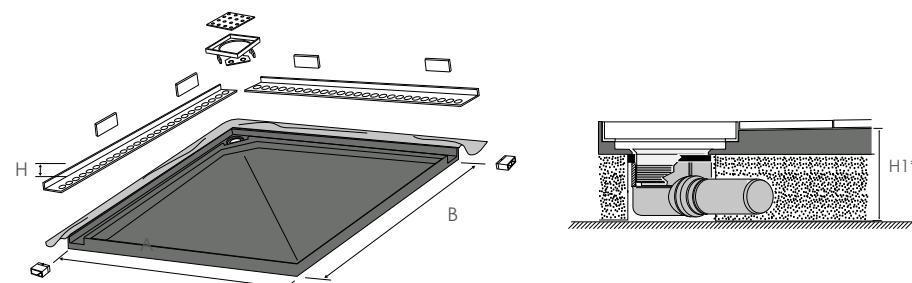

CÓD DESCRIPTION



300101 OLIFILO bilato 1200x1200

measurements are in mm

155

TONDO

OLIFILo CENTRO and OLIFILo RIBASSATO shower grate



- Stainless steel grate;
- Size: 128x128mm;
- Available in a chrome or matt finish.



CÓD DESCRIPTION

301204 TONDO grate 128X128 inox chrome

301206 TONDO grate 128X128 inox matt

QUADRO

OLIFILo CENTRO and OLIFILo RIBASSATO shower grate



- Stainless steel grate;
- Size: 128x128mm;
- Available in a chrome or matt finish.



CÓD DESCRIPTION

301254 QUADRO grate 128X128 inox chrome

301256 QUADRO grate 128X128 inox matt

RIGO

OLIFILo CENTRO and OLIFILo RIBASSATO shower grate



- Stainless steel grate;
- Size: 128x128mm;
- Available in a chrome or matt finish.

CÓD DESCRIPTION

301294 RIGO grate 128X128 inox chrome


301296 RIGO grate 128X128 inox matt

301304 Personalized grate 128X128 inox chrome


301306 Personalized grate 128X128 inox matt

OLI TONDO

OLIFILLO LATO shower Grate



- Stainless steel grate;
- Size: 770x80mm;
- Available in a chrome or matt finish.



CÓD DESCRIPTION

301054 OLI TONDO grate 770X75 inox chrome


301056 OLI TONDO grate 770X75 inox matt

OLI QUADRO

OLIFILLO LATO shower Grate



- Stainless steel grate;
- Size: 770x80mm;
- Available in a chrome or matt finish.



CÓD DESCRIPTION

301154 OLI QUADRO grate 770X75 inox chrome

301156 OLI QUADRO grate 770X75 inox matt

301254 Personalized grate 770X75 inox chrome

301156 Personalized grate 770X75 inox matt



ACCESSORIES




SIPHON

Horizontal



SIPHON

Vertical




CÓD	DESCRIPTION
300401	Horizontal siphon

CÓD	DESCRIPTION
300403	Vertical siphon

SIPHON

D40/50 - 70



INSTALLATION KIT




Waterproof glue + Waterproof strip + Waterproof angles.

CÓD	DESCRIPTION
900159	Siphon D40/50 - 70

CÓD	DESCRIPTION
300452	Installation kit

THICKNESS KIT

In polystirene (EPS)

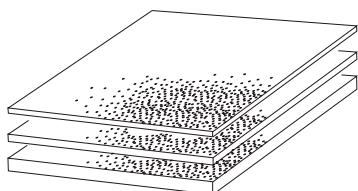

CÓD	DESCRIPTION
300461	EPS elements kit. 900X900
300463	EPS elements kit. 1200X1200
300465	EPS elements kit. 1400X1400



COMPATIBILITY TABLE




	OLI QUADRO	OLI TONDO	OLI RIGO	OLI TONDO	OLI QUADRO
OLIFILo CENTRO 800X800	●	●	●		
OLIFILo CENTRO 900X900	●	●	●		
OLIFILo CENTRO 1000X1000	●	●	●		
OLIFILo CENTRO 1200X1200	●	●	●		
OLIFILo CENTRO 1200X900	●	●	●		
OLIFILo CENTRO 1400X900	●	●	●		
OLIFILo CENTRO RIBASSATO 1200X1200	●	●	●		
OLIFILo LATO 900X1200				●	●
OLIFILo LATO 1000X1200				●	●
OLIFILo BILATO 1200X1200					
SHOWER GRATES AREN'T NECESSARY WITH THIS SYSTEM					


SIPHON HORIZONTAL	SIPHON VERTICAL	SIPHON D40/50-70	EPS THICKNESS KIT	INSTALLATION KIT*
●	●		● 900X900	●
●	●		● 900X900	●
●	●		● 1200X1200	●
●	●		● 1200X1200	●
●	●		● 1200X1200	●
●	●		● 1400X1400	●
THIS SYSTEM HAS INTEGRATED SIPHON				
●	●		● 1200X1200	
●	●		● 1200X1200	
●	●		● 1200X1200	

SPARE PARTS



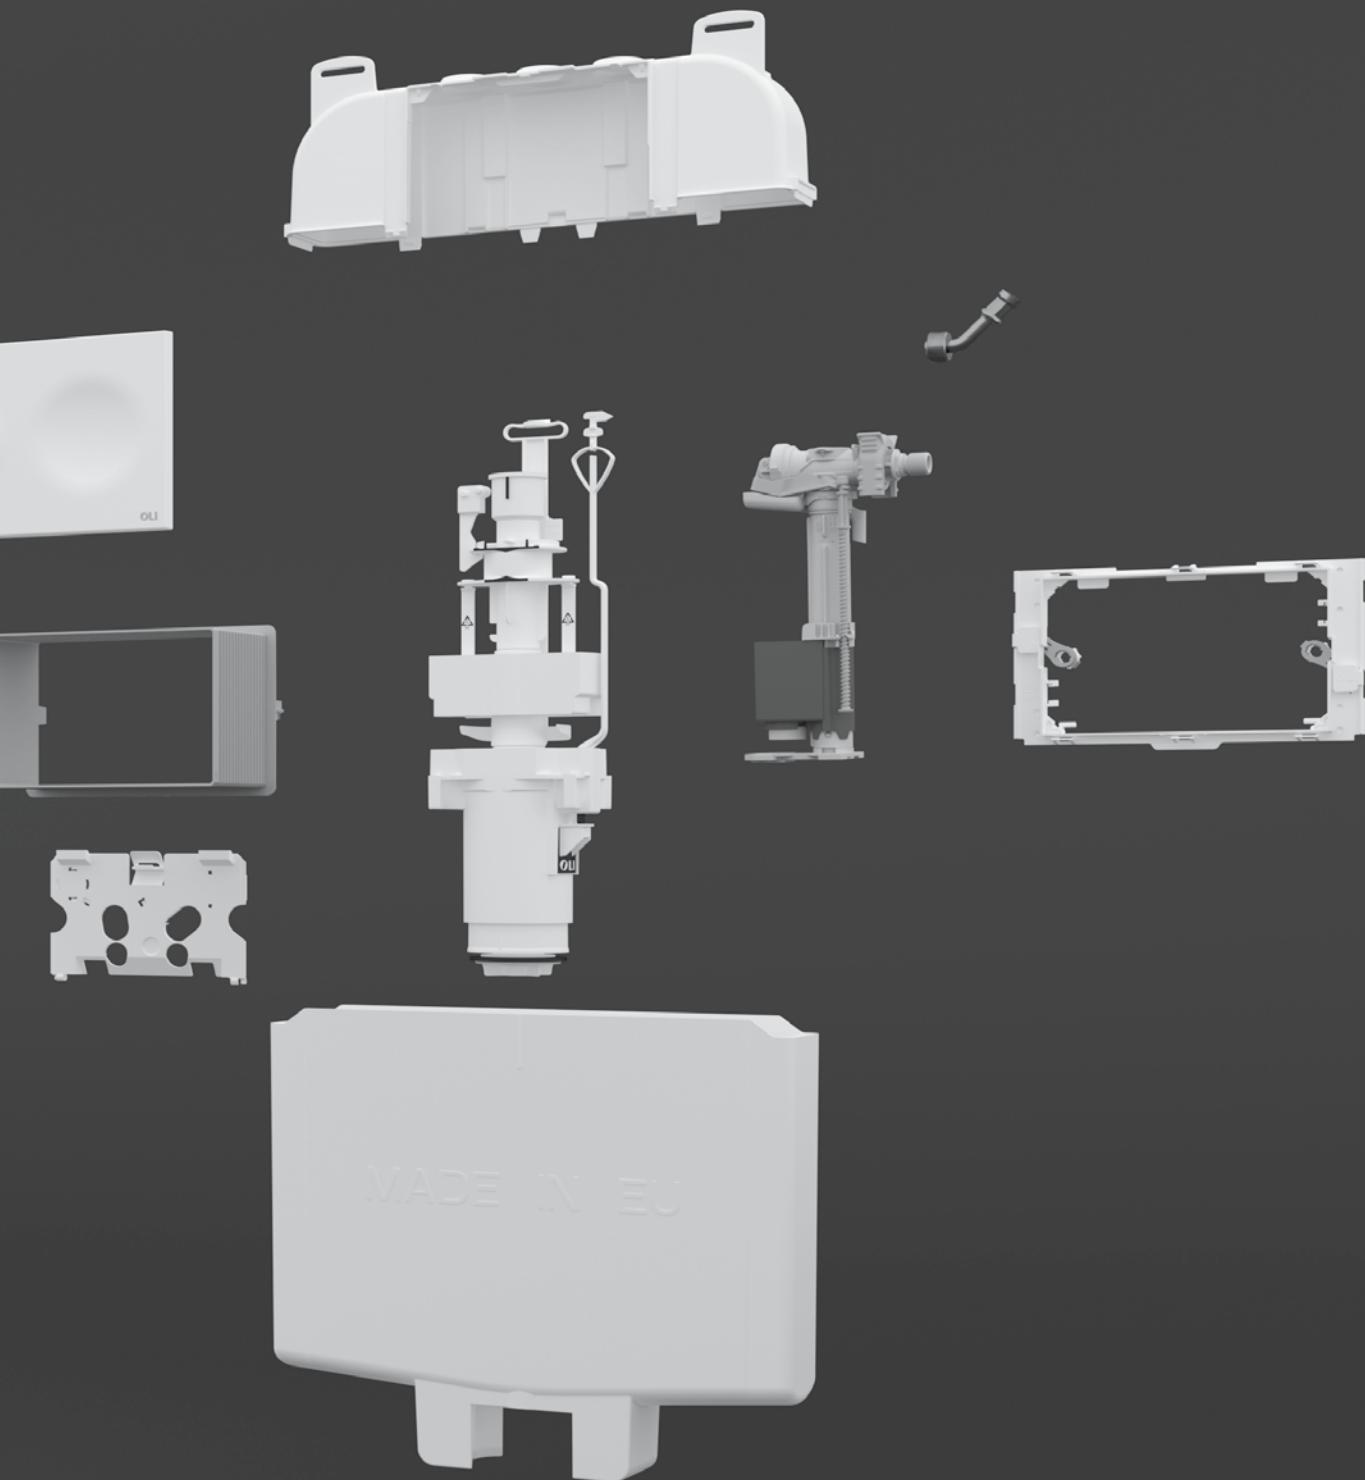

SANITARY MODULES - QR-INOX/QR TOTAL

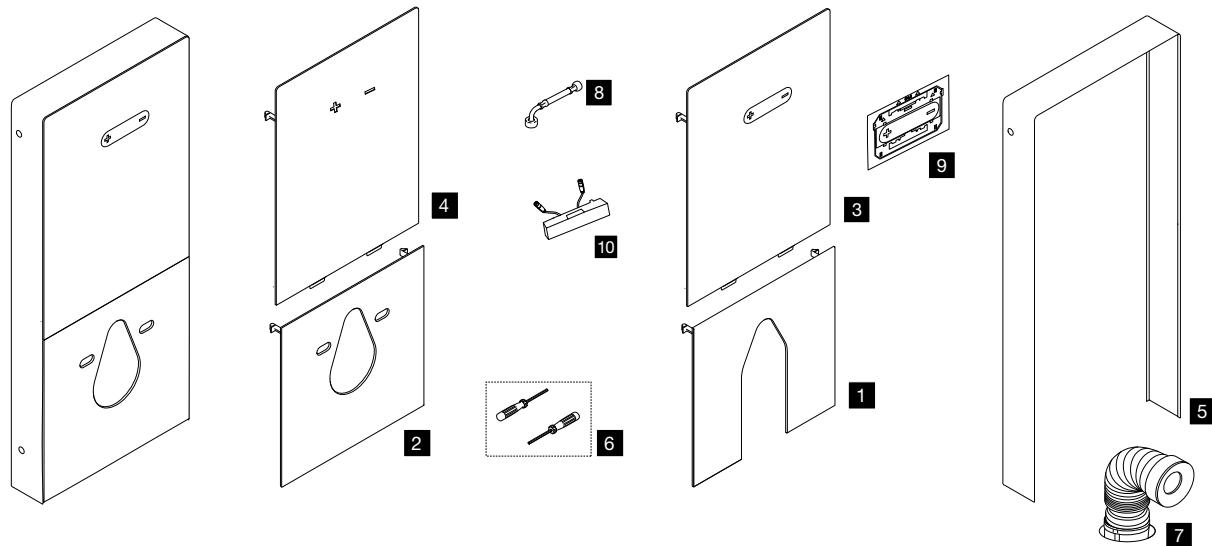


Nr.	Code	Description	Qt.	Code
1.1	079894	QR-INOX White bottom floor glass	1	
1.2	079889	QR-INOX Black bottom floor glass	1	
2.1	079893	QR-INOX White bottom glass hung wc	1	
2.2	079888	QR-INOX Black bottom glass hung wc	1	
2.3	879121	QR-INOX Gold bottom glass hung wc	1	
2.4	879122	QR-INOX Taupe bottom glass hung wc	1	
2.5	879124	QR-INOX Anthracite bottom glass hung wc	1	
2.6	879125	QR-INOX Red bottom glass hung wc	1	
3.1	079890	QR-INOX White button top glass	1	
3.2	079886	QR-INOX black button top glass	1	
3.3	878722	QR-INOX Gold button top glass	1	
3.4	878723	QR-INOX Taupe button top glass	1	
3.5	878724	QR-INOX Anthracite button top glass	1	
3.6	878725	QR-INOX Red button top glass	1	
4.1	079891	QR-INOX White no-touch top glass	1	
4.2	079887	QR-INOX Black no-touch top glass	1	
5.1	879139	QR-INOX side frame freestanding	1	
5.2	879137	QR TOTAL Black side frame	1	
5.3	879138	QR TOTAL White side frame	1	
5.4	079927	QR-INOX side frame	1	
6	079928	Screwdrivers for maintenance access	2	
7	079929	Flexible outlet wc bend	1	
8	079932	QR-INOX button flexible hose	1	
9	079937	QR-INOX push button	1	
10	878680	Cap sensor	1	

NOTE. Remaining spare parts Page 168

SANITARY MODULES - QR-BOX


NOTE. Flush cistern spare parts Page 168

EASY MOVE

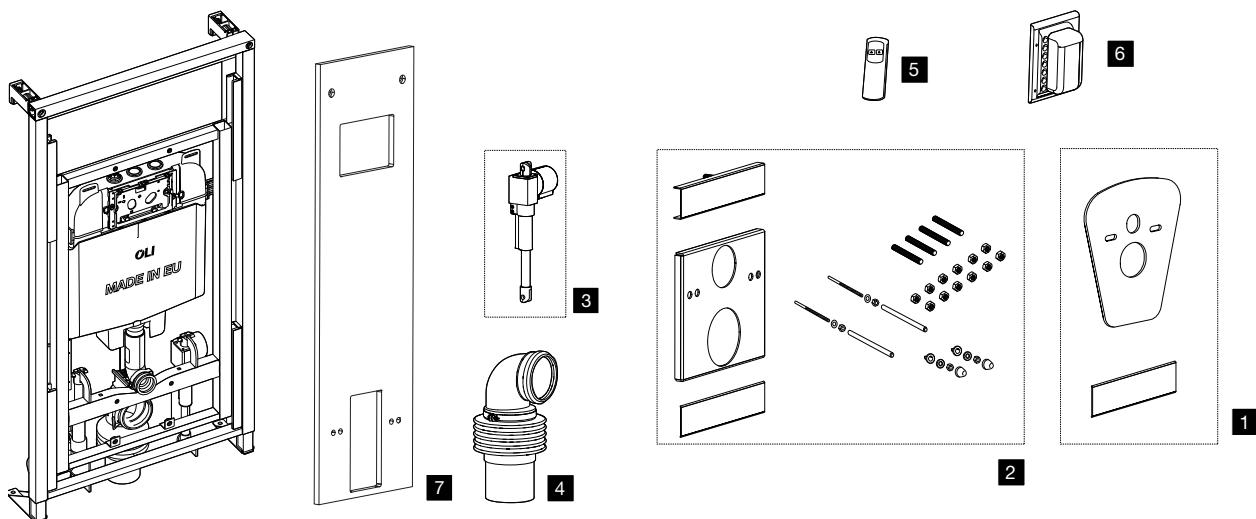


Nr.	Code	Description	Qt. Code
1	054650	Acoustic insulation	1
2	054409	Accessories for wc pan fixation	1
3	054495	Hydraulic engines	1
4	054649	Extensible outlet bend	1
5.1	054641	Wireless remote control	1
5.2	054642	Wired remote control	1
6.1	054644	Wireless remote control transformer	1
6.2	054497	Wired remote control transformer	1
7	879146	Wood support fixation	1

HAPPY AIR

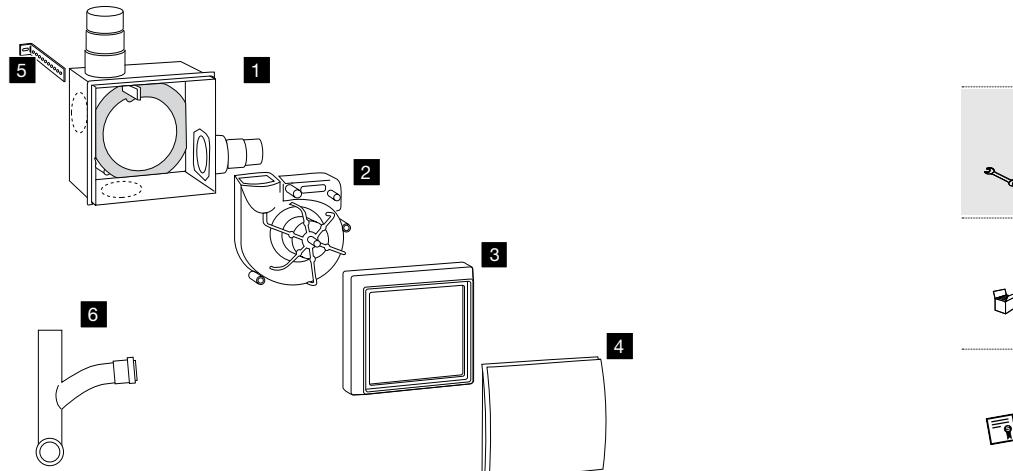

Nr.	Code	Description	Qt. Code
1	601539	Fan box	1
2	601541	Happy air fan	1
3	601535	Frame for 105mm walls	1
4	601540	Covering plate with filter	1
5	601536	Fixation kit (2 metal plates and screws)	1
6	054673	"Y" flush pipe	1


OLI120 PLUS / OLI120

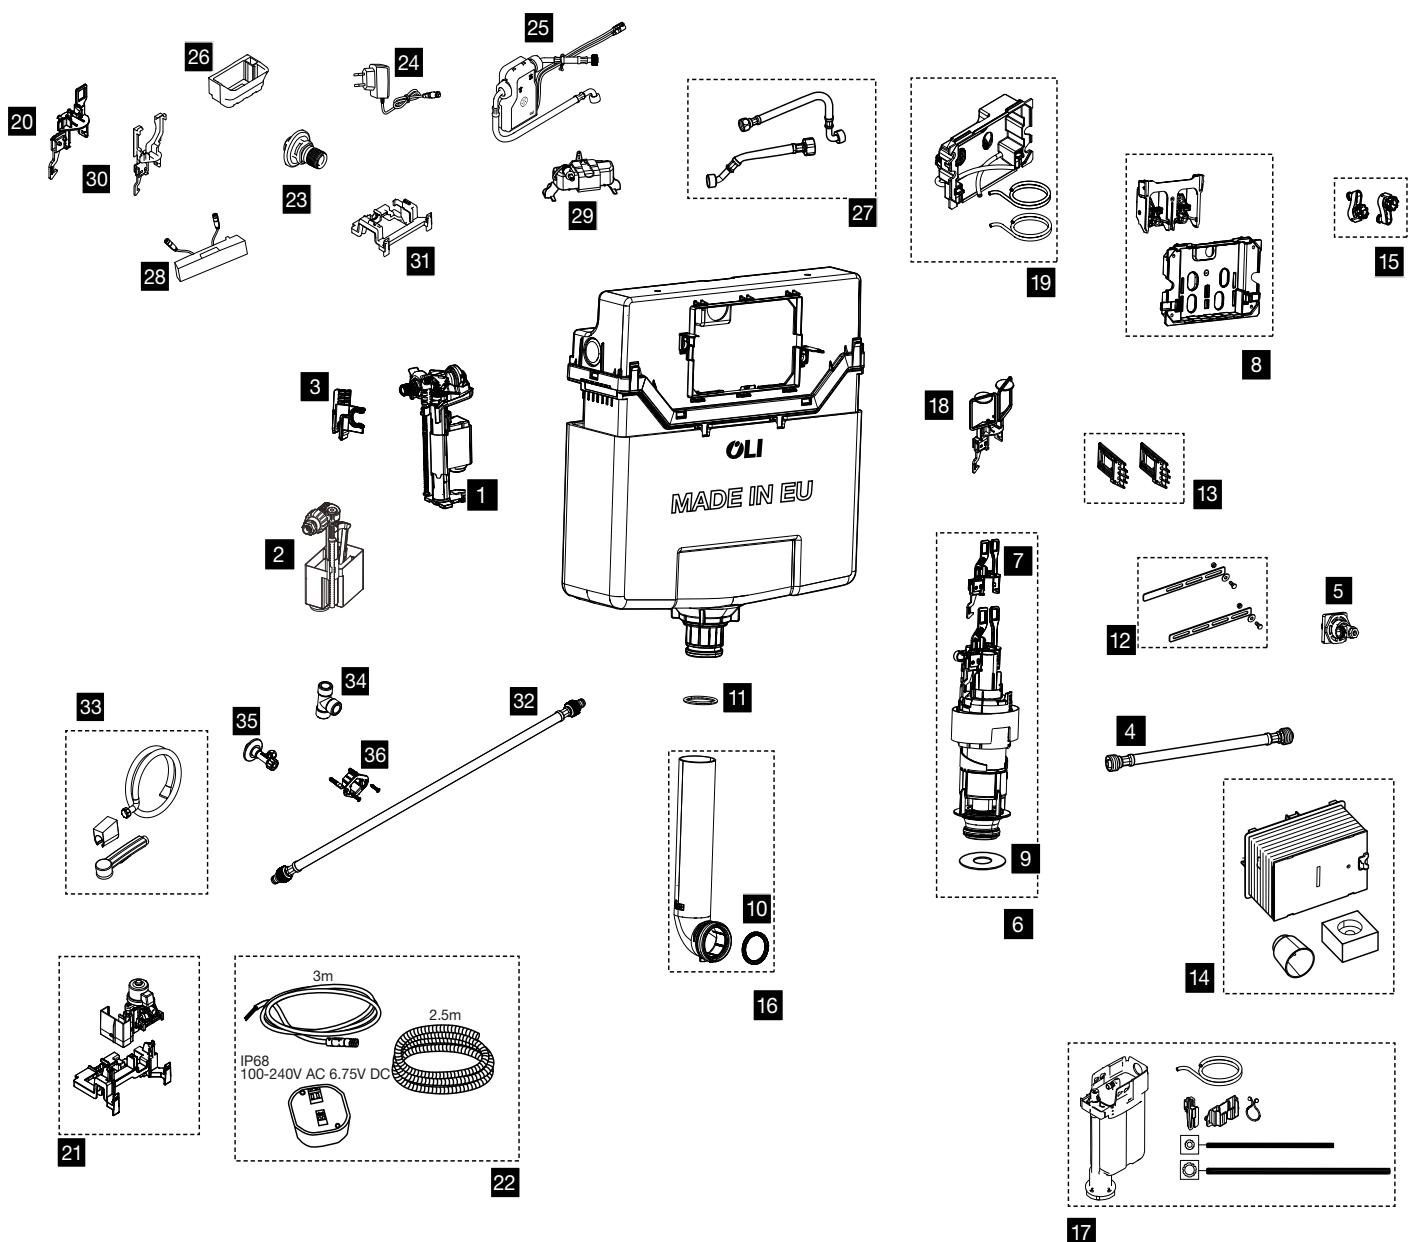

Nr.	Code	Description	Qt. Code
1.1	091096	Inlet valve AZOR PLUS 3/8	1
1.2	181714	AZOR PLUS 3/8" OLIpure	1
2	179412	Inlet valve UNI 3/8	1
3	101749	Inlet valve support	5
4	101754	Flexible hose 3/8 / 3/8 x 215	1
5	101755	Stop valve	1
6	101756	Outlet valve	1
7	101745	Mechanic outlet valve anchors	1
8	101757	Protective plate with mechanic outlet valve lever	1
9	101758	Outlet valve seal	10
10	101753	Flush pipe seal Ø45	5
11	021212	O-Ring Ø37	5
12	021210	Fixation kit without frame	2
13	101759	Fixation for sanitärblock frame	2
14	026698	Protective box >09	1
15	011150	Control plate fixers	2
16	101761	Complete flush pipe	1
17	181713	OLIpure kit	1
18	877843	Pneumatic outlet valve anchors	1
19	878807	Protective plate with pneumatic set.	1
20	878809	electronic anchors	1
21	878810	electronic actuator	1
22	878674	AC transformer	1
23	878675	Connection	1
24	878676	Charger	1
25	879252	Turbine with flexible pipes	1
26	878678	Turbine support	1
27	878852	Flexible pipes	1
28	878680	Cap sensor	1
29	878681	Servomotor block	1
30	878768	Cap Hydroboost/Cap AC outlet valve anchors	1
31	878746	Central block	1
32	878932	Flexible hose 1/2FX3/8F 1200 SHT	1
33	878933	Toilet shower SHT	1
34	878934	Brass connection 3/8 SHT	1
35	878937	Stop valve 1/2X10 SHT	1
36	878939	Wall fixation SHT	1




OLI74 PLUS

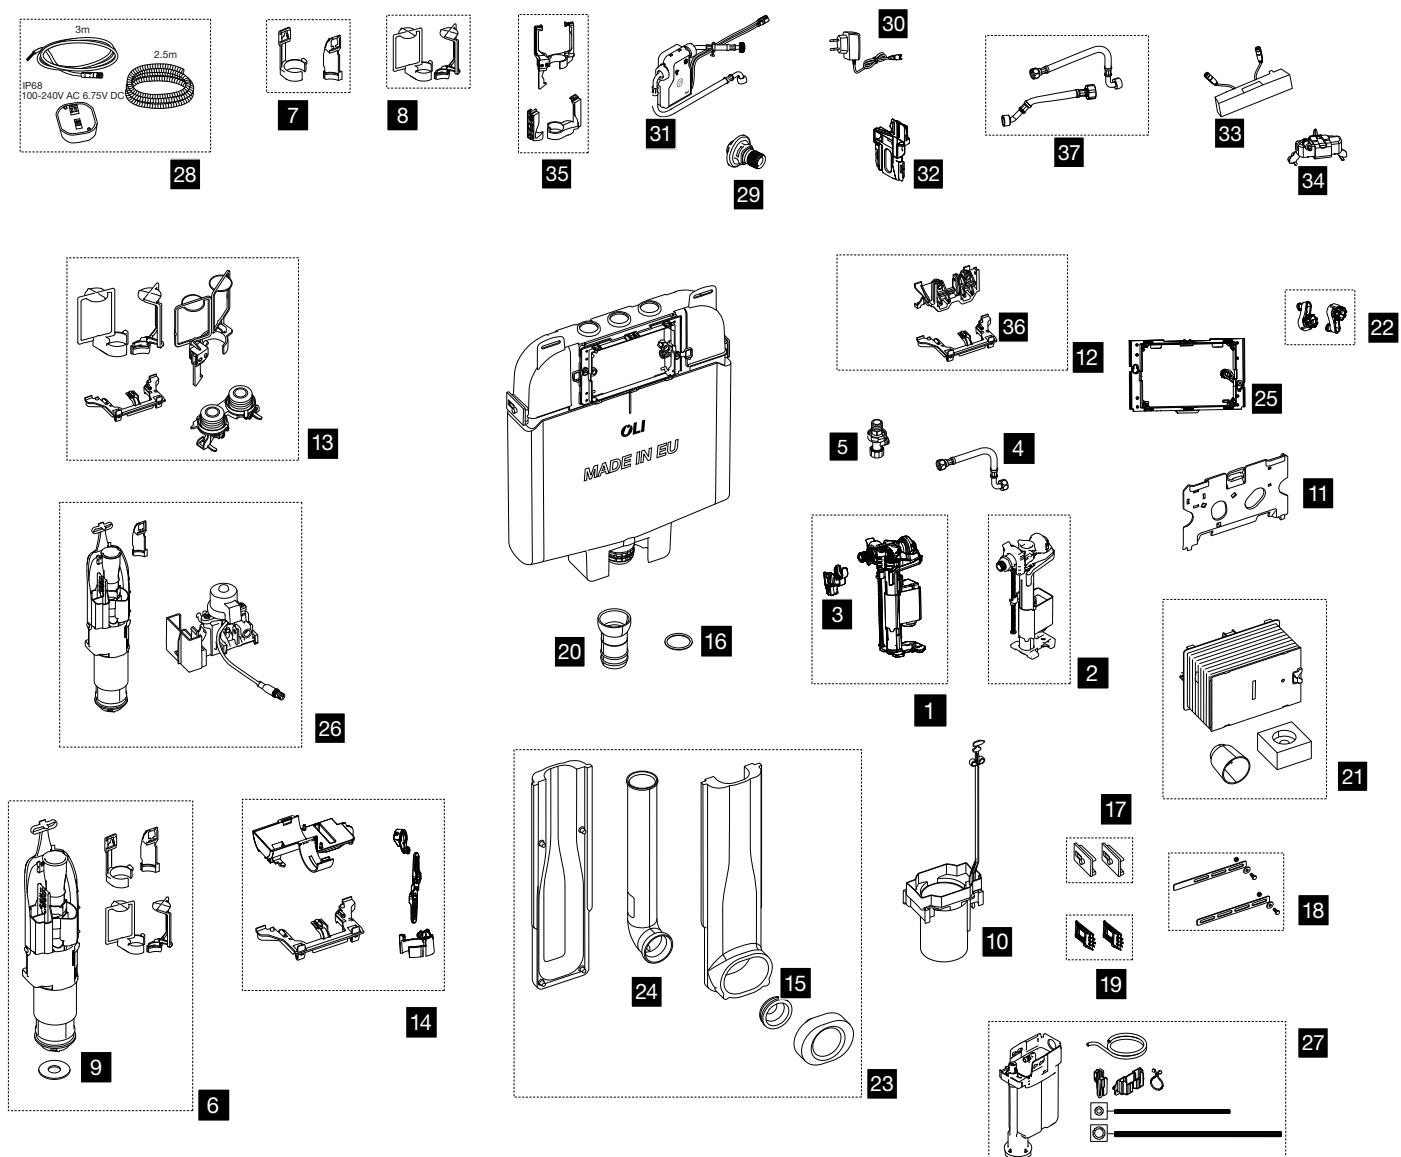


Nr.	Code	Description	Qt. Code
1	091096	Inlet valve AZOR PLUS 3/8"	1
2	181714	AZOR PLUS 3/8" OLIpure	1
3	006968	Inlet valve support	5
4	033424	Flexible hose 3/8 / 3/8 x 215	1
5	011972	Stop valve	1
6	002992	Outlet valve	1
7	011440	Mechanic outlet valve anchors	1
8	878811	Pneumatic outlet valve anchors	1
9	049484	Outlet valve seal 60X23.8X2.7	10
10	026701	Outlet valve guide	1
11.1	021271	Protective plate >09	1
11.2	053424	Protective plate <09	1
12	011973	Lever block	1
13	028444	Pneumatic set	1
14	036936	Electronic system set < 14	1
15	021209	Flush pipe seal Ø40/45	5
16	021212	O-Ring Ø37	5
17	006971	Simflex fixation	10
18	021210	Fixation kit without frame	1
19	006973	Fixation for Sanitarblock frame	10
20	049504	Articulated pipe with O-Ring	1
21.1	026698	Protective box >09	1
21.2	002527	Protective box <09	1
22	011150	Control plate fixers	2
23	049510	Complete flush pipe	1
24	021266	Flush pipe 56X360	1
25	011195	Base for protective box	1
26	077754	Electronic kit (flush valve included)	1
27	181713	OLIpure KIT	1
28	878674	AC transformer	1
29	878675	Connection	1
30	878676	Charger	1
31	878677	Turbine with flexible pipes	1
32	878679	Turbine support	1
33	878680	Cap sensor	1
34	878681	Servomotor block	1
35	074745	Cap Hydroboost/Cap AC outlet valve anchors	1
36	878747	Central block	1
37	878851	Flexible pipes	1



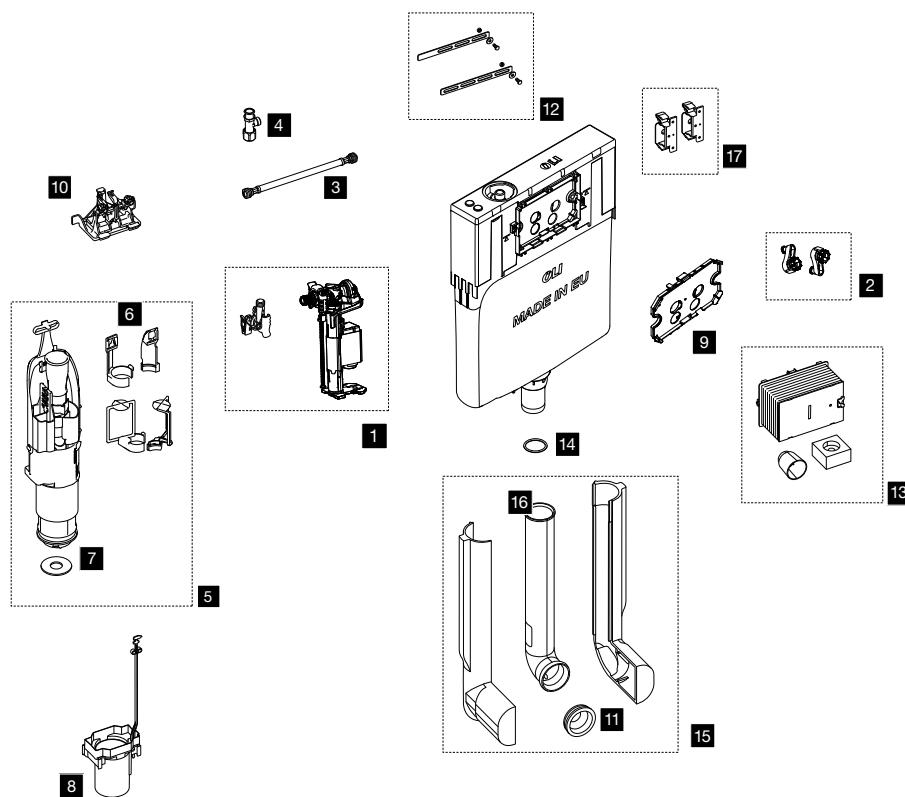


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	011150	Control plate fixers	2
3	021204	Flexible hose 3/8 / 3/8 X 250	1
4	021206	Stop valve	1
5	002992	Outlet valve	1
6	011440	Mechanic outlet valve anchors	1
7	049484	Outlet valve seal 60X23.8X2.7	10
8	026701	Outlet valve guide	1
9	033412	Protective plate	1
10	026709	Lever block	1
11	021209	Flush pipe seal Ø40/45	5
12	021210	Fixation kit without frame	1
13	026698	Protective box >09	1
14	021212	O-Ring Ø37	5
15	021267	Complete flush pipe	1
16	021266	Flush pipe 56X360	1
17	021213	Fixers	2

EXPERT PLUS

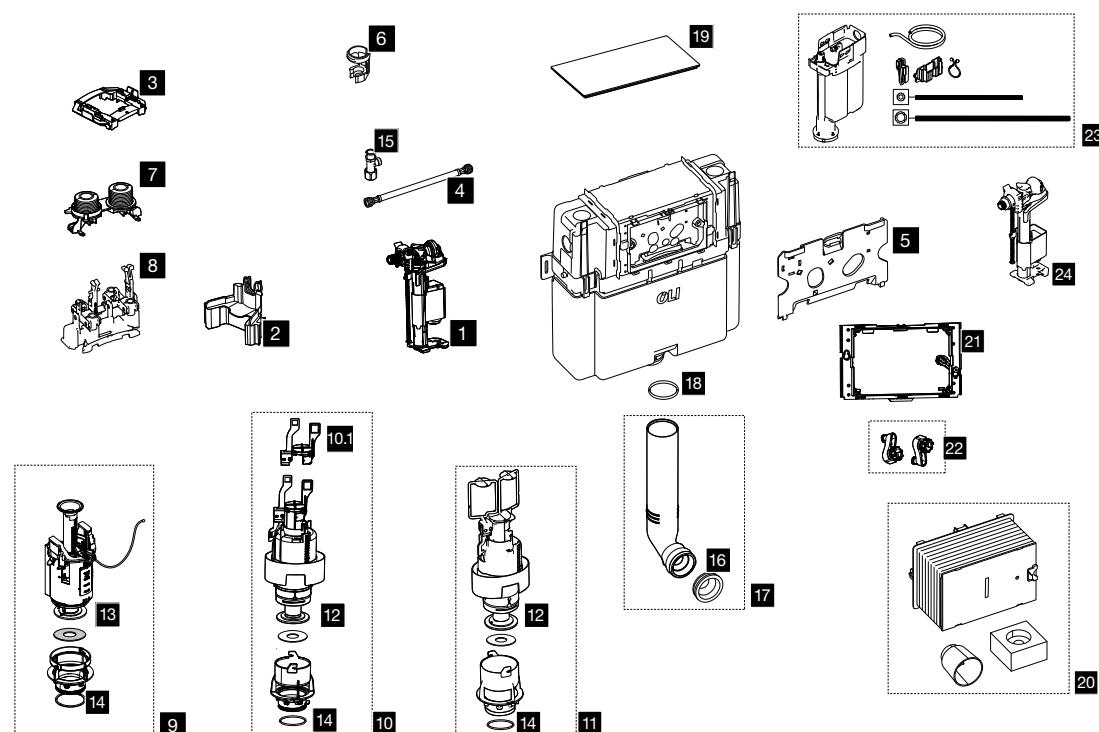


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	011954	Inlet valve support	1
3	021269	Central block	1
4	021270	Flexible hose 3/8 / 3/8 X 30	1
5	021271	Protective plate >09	1
6	021272	Stop valve support	1
7	033301	Pneumatic block	1
8	033303	Lever block	1
9	030484	Outlet valve cable	1
10	033125	Mechanic outlet valve	1
10.1	056934	Mechanic outlet valve anchors	1
11	033126	Pneumatic outlet valve	1
12	049484	Outlet valve seal 60X23.8X2.7	10
13	049506	Cable outlet valve seal 60x26.5x2	10
14	033305	O-Ring valve guide	10
15	021206	Stop valve	1
16	021209	Flush pipe seal Ø40/45	5
17	011982	Flush pipe 315	1
18	033313	Flush pipe O-Ring Ø55	5
19	033314	Protective plate	1
20	026698	Protective box >09	1
21	011195	Base for protective box	1
22	011150	Control plate fixers	2
23	181713	OLIpure kit	1
24	181714	AZOR PLUS 3/8" OLIpure	1

EVO 330

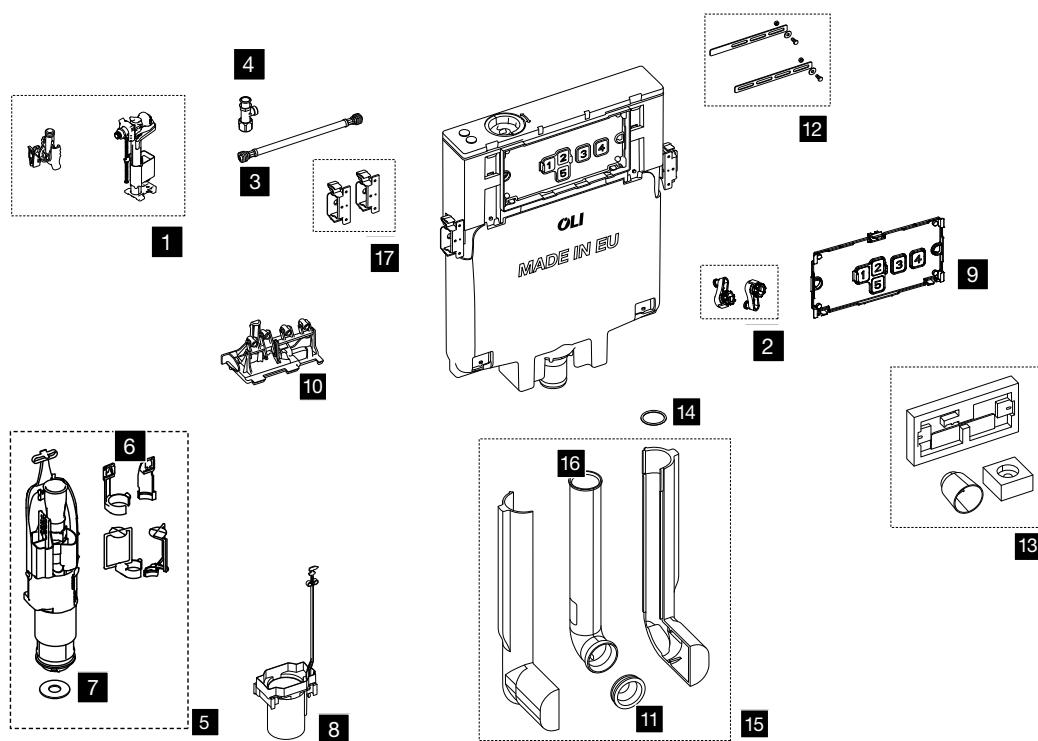

Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	011150	Control plate fixers	2
3	021204	Flexible hose 3/8 / 3/8 X 250	1
4	021206	Stop valve	1
5	002992	Outlet valve	1
6	011440	Mechanic outlet valve anchors	1
7	049484	Outlet valve seal 60X23.8X2.7	10
8	026701	Outlet valve guide	1
9	021207	Protective plate	1
10	021208	Lever block	1
11	021209	Flush pipe seal Ø40/45	5
12	021210	Fixation kit without frame	1
13	021211	Protective box	1
14	021212	O'ring Ø37	5
15	021267	Complete flush pipe	1
16	021266	Flush pipe 56X360	1
17	021213	Fixers	2


DIAMANTE

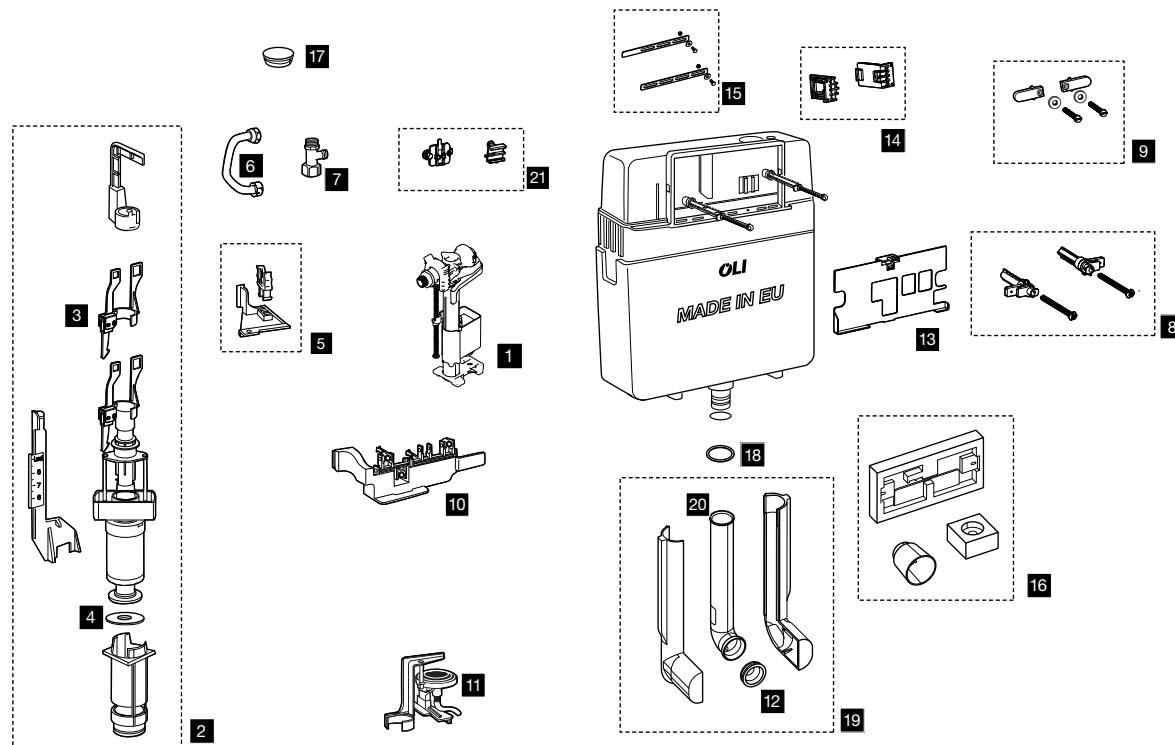


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	037106	Outlet valve	1
3	056932	Mechanic outlet valve anchors	1
4	049484	Outlet valve seal 60X23.8X2.7	10
5	049512	Inlet valve support	1
6	049513	Copper bend with seal	1
7	021206	Stop valve	1
8	037104	Fixation kit >99	1
9	015639	Fixation kit <99	1
10	032477	Lever block	1
11	556805	Pneumatic block	1
12	021209	Flush pipe seal Ø40/45	5
13	033494	Protective plate	1
14	011975	Fixers	10
15	021210	Fixation kit without frame	1
16	021211	Protective box	1
17	037105	Cover protection	5
18	021212	O'ring Ø37	5
19	021267	Complete flush pipe	1
20	021266	Flush pipe 56X360	1
21	048607	Lever block fixer	1



BETTER

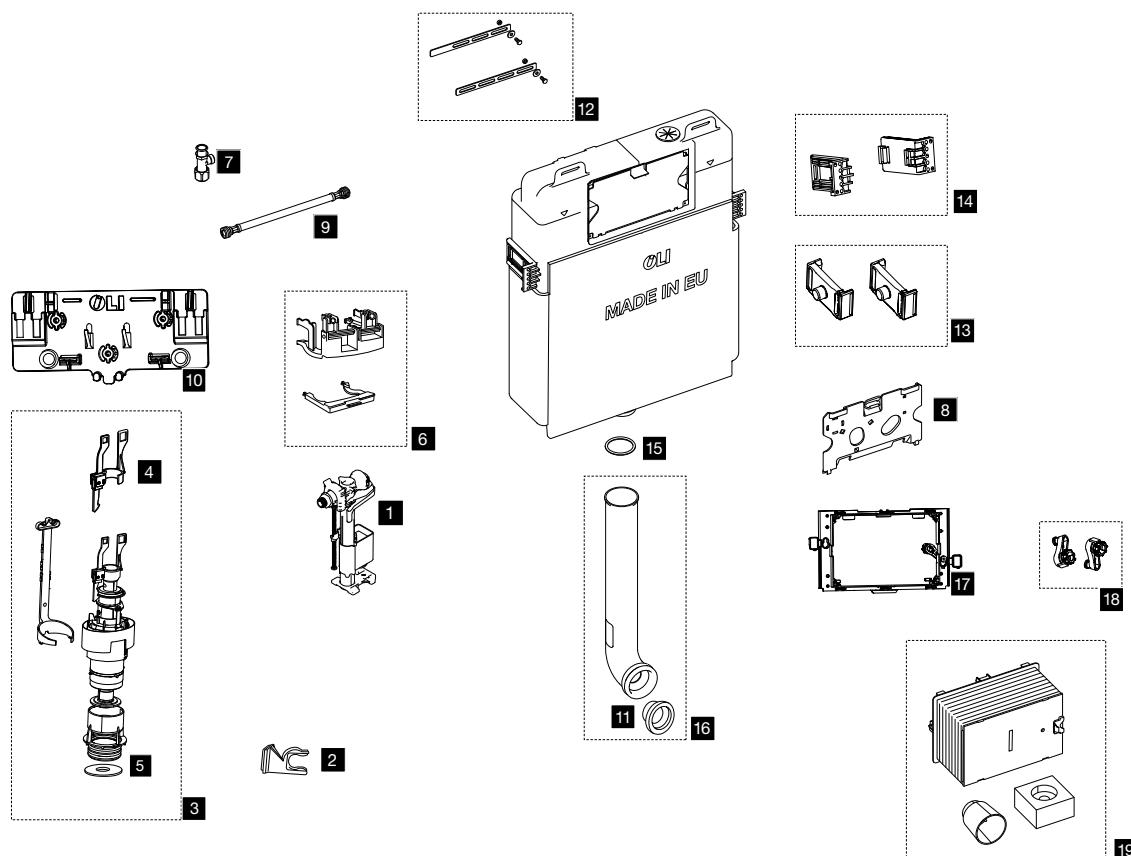


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	033449	Inlet valve support	1
3	002987	Outlet valve	1
4	056932	Mechanic outlet valve anchors	1
5	049484	Outlet valve seal 60X23.8X2.7	10
6	033450	Lever block	1
7	021206	Stop valve	1
8	021271	Protective plate >09	1
8.1	053424	Protective plate <09	1
9	050997	Flexible hose 3/8 / 3/8 X 400	1
10	033451	Lever block fixer	1
11	021209	Flush pipe seal Ø40/45	5
11.1	037113	Flush pipe seal Ø45	5
12	021210	Fixation kit without frame	1
13	011977	Simflex fixers	10
14	011978	Sanitarblock fixers	10
15	021212	O'ring Ø37	5
16	021266	Flush pipe 56X360	1
17	011195	Base for protective box	1
18	011150	Control plate fixers	2
19	026698	Protective box >09	1
19.1	002527	Protective box <09	1

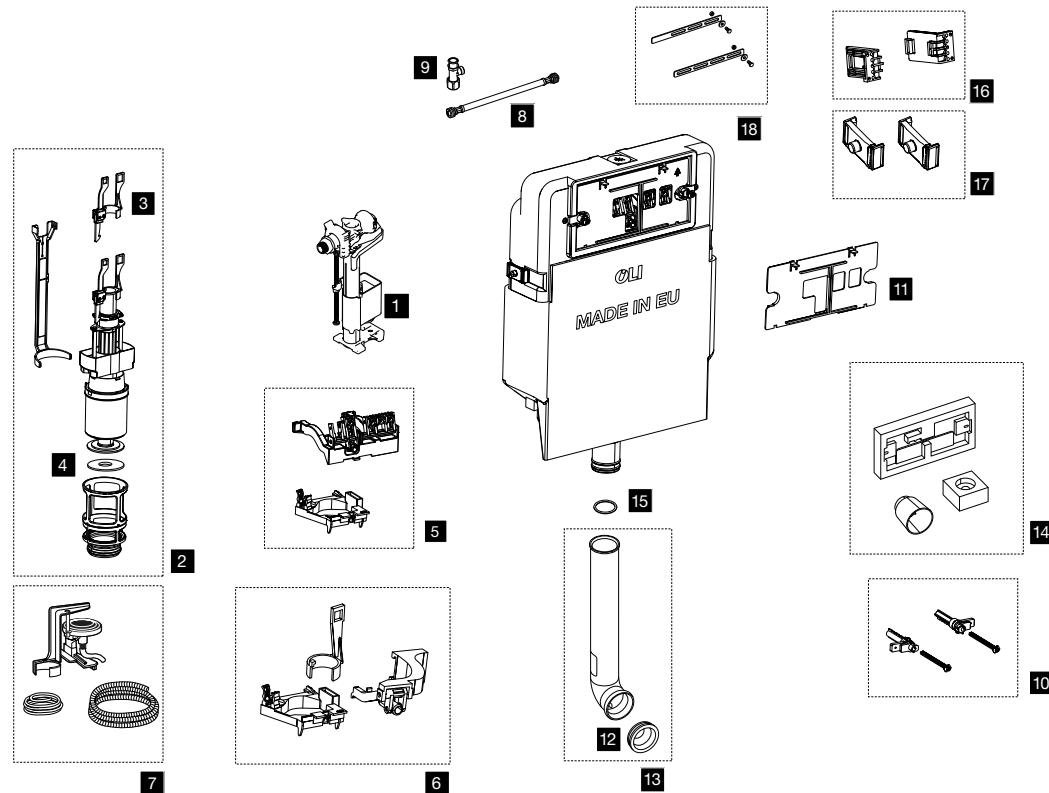


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	048681	Outlet valve	1
3	056932	Mechanic outlet valve anchors	1
4	002997	Outlet valve seal	10
5	041637	Lever block	1
6	037117	Lever block <01	1
7	556801	Pneumatic block	1
8	021270	Flexible hose 3/8 / 3/8 X 30	1
9	021206	Stop valve	1
10	037104	Fixation kit <99	1
11	037114	Protective plate	1
12	021209	Flush pipe seal Ø40/45	5
12.1	037113	Flush pipe seal Ø45	5
13	021266	Flush pipe 56X360	1
14	021211	Protective box	1
15	021212	O'ring Ø37	5
16	011978	Sanitarblock fixers	10
17	011977	Simflex fixers	10
18	021210	Fixation kit without frame	1

EXPERT/CORNER

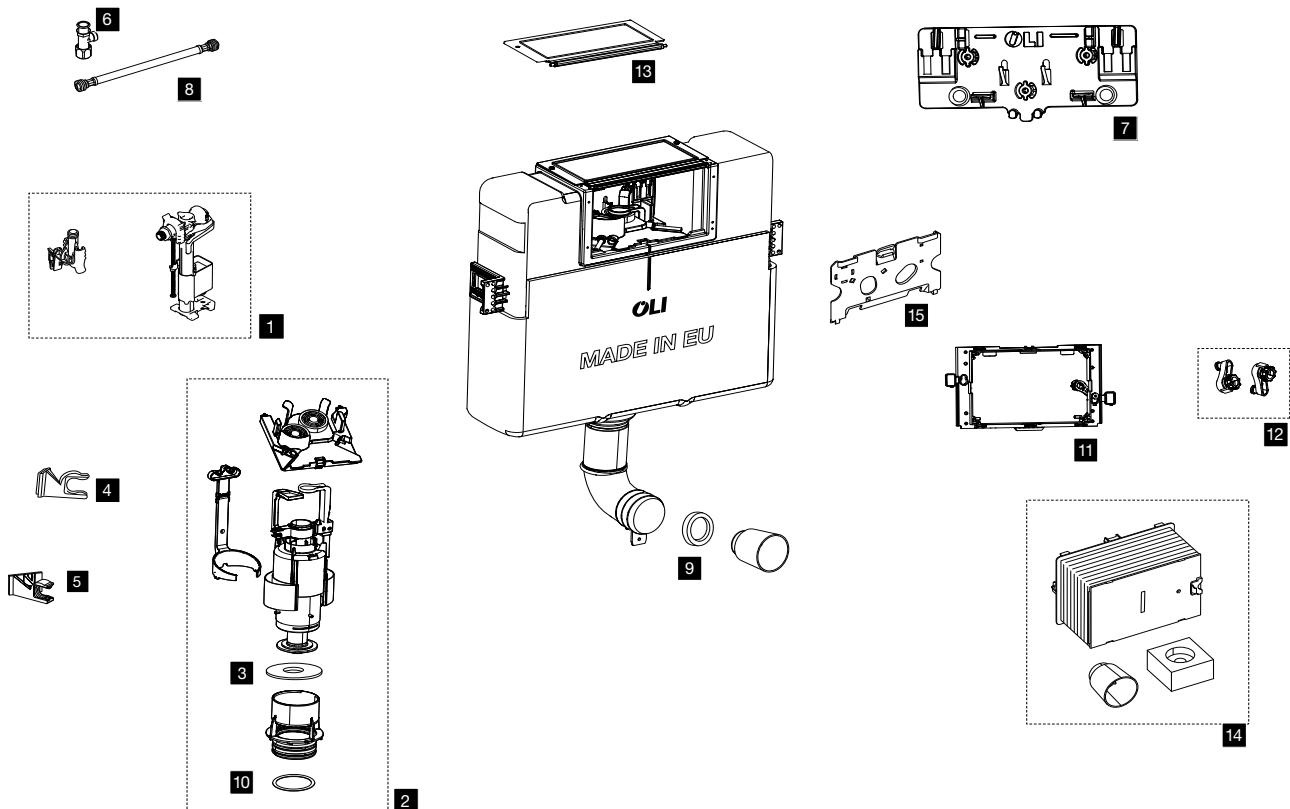


Nr.	Code	Description	Qt.	Code
1	021203	Inlet valve 3/8	1	
2	048288	Outlet valve	1	
3	049484	Outlet valve seal 60X23.8X2.7	10	
4	037123	Expert inlet valve support	5	
5	037122	Corner inlet valve support	5	
6	021206	Stop valve	1	
7	033451	Lever block fixer	1	
8	050997	Flexible hose 3/8 / 3/8 X 400	1	
9	037113	Flush pipe seal Ø45	5	
10	021212	O'ring Ø37	5	
11	011195	Base for protective box	1	
12	011150	Control plate fixers	2	
13	041672	Protective top/front plate	1	
14	026698	Protective box >09	1	
15	021271	Protective plate <09	1	

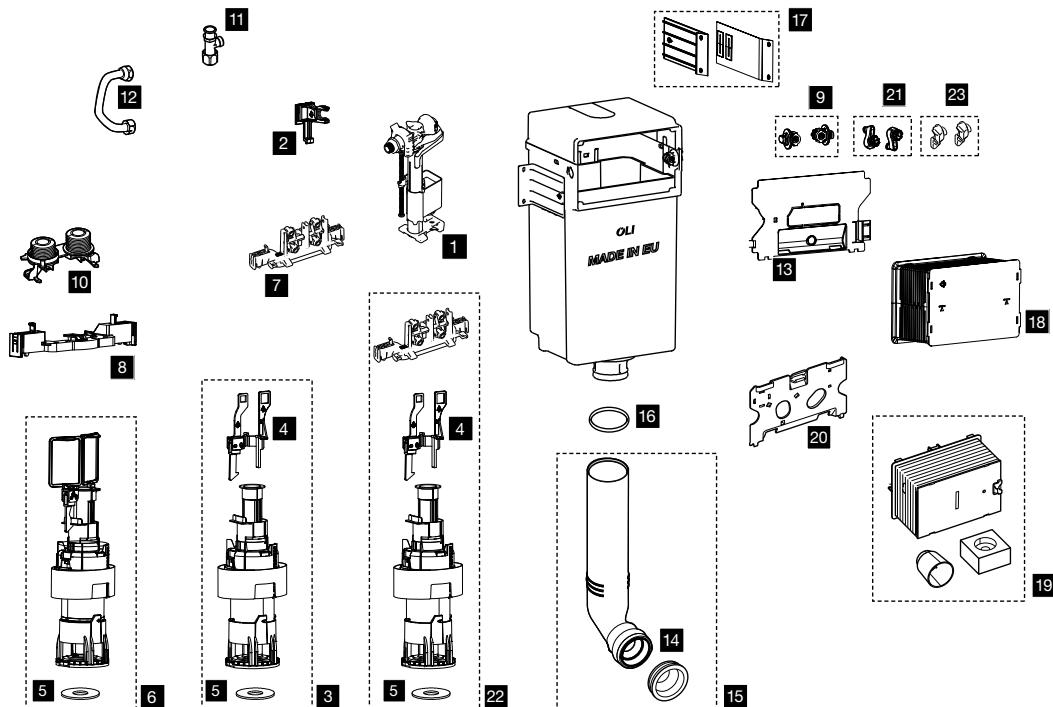
QUADRA PLUS


Nr.	Code	Description	Qt. Code
1	021203	Inlet valve 3/8	1
2	036958	Inlet valve support	5
3	036969	QUADRA mechanical outlet valve	1
4	056971	Mechanic outlet valve anchors	1
5	049484	Outlet valve seal 60X23.8X2.7	10
6	036972	QUADRA pneumatic outlet valve	1
7	011911	Lever block	1
8	036963	Pneumatic block	1
9	036964	Control plate fixers <17	2
10	033301	Pneumatic bellows	1
11	021206	Stop valve	1
12	036970	Inlet valve connection	1
13	036966	Protection plate <17	1
14	021209	Flush pipe seal Ø40/45	5
15	011982	Flush pipe 315	1
16	033313	Flush pipe O-Ring Ø55	5
17	036962	Cistern fixation	2
18	002527	Protective box <17	1
19	026698	Protective box >17	1
20	021271	Protective plate >17	1
21	011150	Control plate fixers >17	2
22	205107	Mechanic kit <17	1
23	205104	Control plate fixers and cistern holder > 17	2

FRAMES BIDET/WASHBASIN

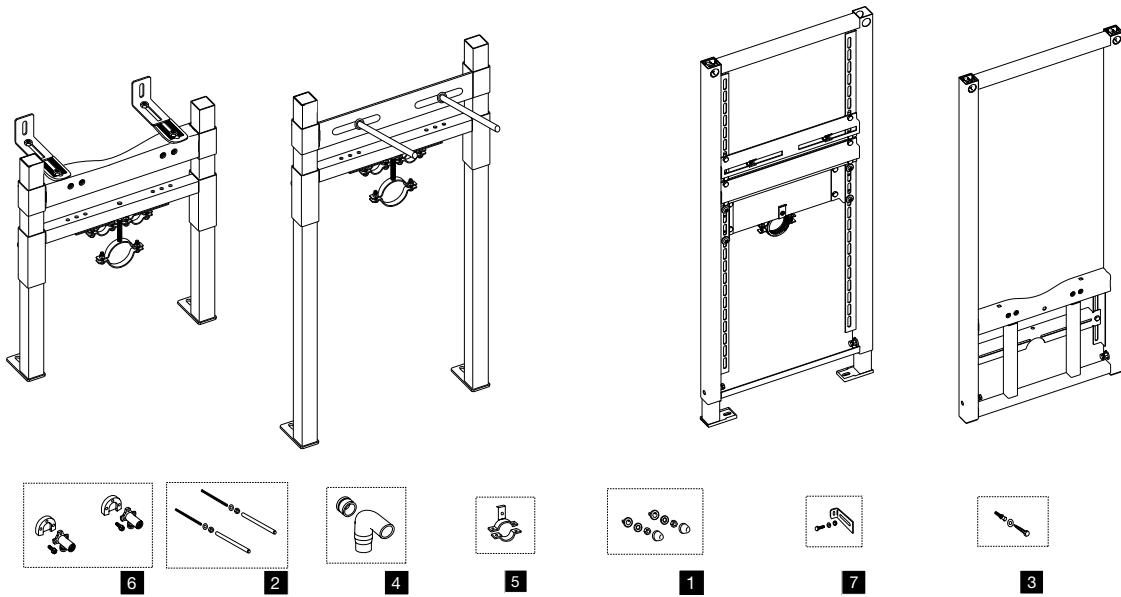


Nr.	Code	Description	Qt.	Code
1	622301	White fixation kit	1	
1.1	622303	Chrome fixation kit	1	
2	036886	Frame accessories kit M12	2	
3	037148	Fixation screws	4	
4	054576	Outlet bend Ø50	1	
5	037144	Metal support for BIDET Simflex	1	
6	011170	Simflex kit water connections	2	
7	054577	Kit BIDET/WASHBASIN 120mm	2	

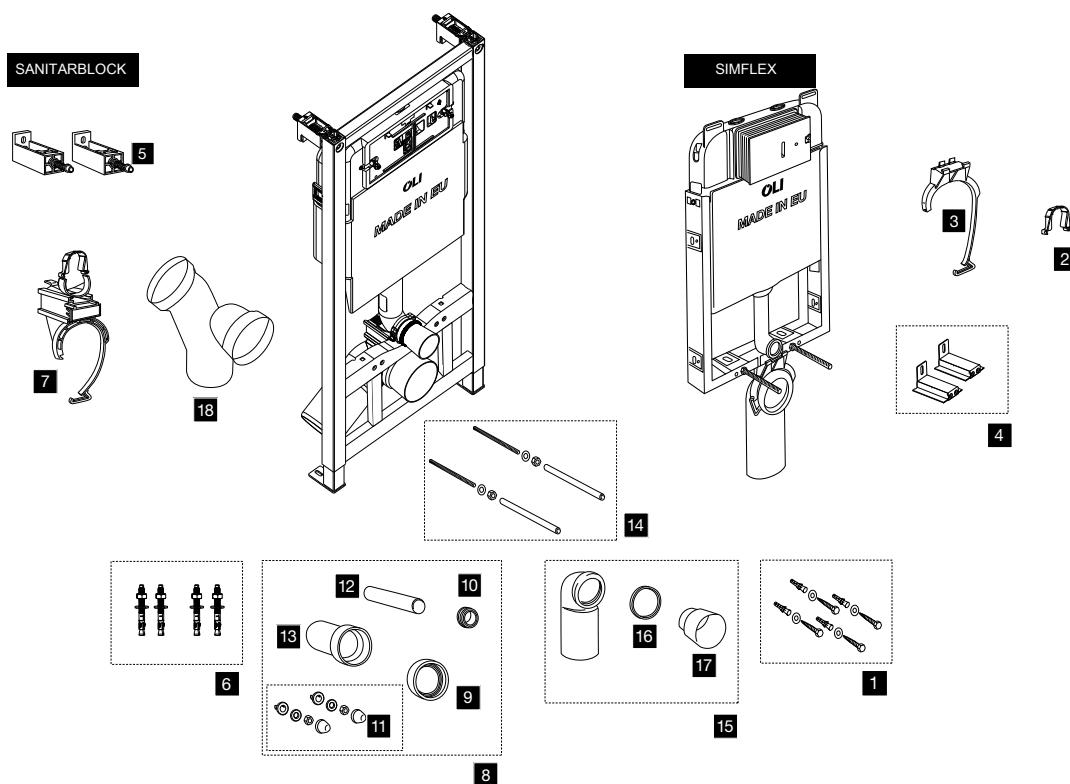FRAMES


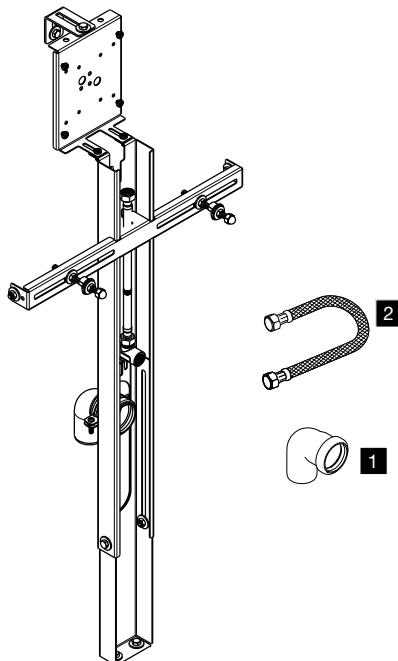
Nr.	Code	Description	Qty.	Code
1	037148	Fixation screws	4	
2	037145	Flush pipe support	1	
3	011984	Simflex outlet bend support	1	
4	034899	Fixation kit for simflex frame 120mm	2	
4.1	034898	Fixation kit for simflex frame 80mm	2	
5	054389	Fast fixation kit 144mm	2	
5.1	004252	Fast fixation kit 181mm	2	
6	012196	Fixation kit for free-standing frame	4	
7	048974	Sanitarblock outlet bend support	1	
7.1	195524	Sanitarblock S90 outlet bend support	1	
8	622501	Connection pipes Ø45 Ø90	1	
9	037134	Rubber seal for pan Ø125	1	
10	037133	Rubber seal Ø45	5	
10.1	050992	Rubber seal Ø40	5	
10.2	050993	Rubber seal Ø32	5	
11	622301	White fixation kit	1	
11.1	622303	Chrome fixation kit	1	
12	037132	Flush pipe adaptor Ø45X180	1	
13	037129	WC connection pipe Ø90x250 OLI	1	
14	036886	Frame accessories kit M12	2	
15	036888	Outlet bend Ø90X90	1	
15.1	053995	Outlet bend Ø90X110	1	
16	036889	Rubber seal Ø90 outlet bend	5	
17	036890	Protection pipe Ø90	1	
18	111238	Double Outlet bend	1	

4 WC FIXATION POINTS

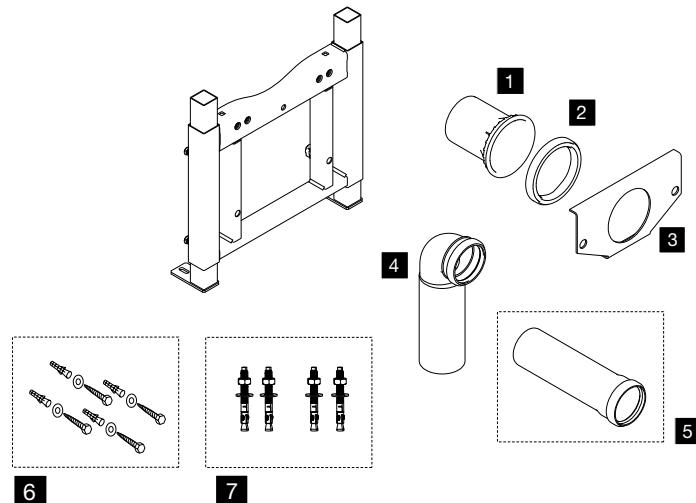


Nr.	Code	Description	Qt. Code
1	878868	WC connection pipe Ø90X120	1
2	878876	Rubber seal Ø126X15	1
3	878879	Steel sheet WC 4 fix	1
4	036888	Outlet bend Ø90X90	1
5	879174	Connecting pipe 250x90x90	1
6	037148	Fixation screws	4
7	012196	Fixation kit for free-standing frame	4


ECO URINAL FRAME




Nr.	Code	Description	Qt. Code
1	878901	Outlet bend 50x50	
2	878900	Flexible hose 1/2x1/2 F/F 300	

MOON



2



4



3




1




5


Nr.	Code	Description	Qt. Code
1	053897	Plate fixation screws	2
2	074736	MOON White frontal plate	1
2.1	879078	MOON Black frontal plate	
3	878680	Cap sensor	1
4	879208	Counter Plate	1
5	878681	Servomotor block	

GLASSY



1




4



3




2



5


Nr.	Code	Description	Qt. Code
1	878853	GLASSY frontal plate Gold plated	1
1.1	878854	GLASSY frontal plate Taupe	1
1.2	878855	GLASSY frontal plate Anthracite	1
1.3	878856	GLASSY frontal plate Red	1
1.4	084297	GLASSY frontal plate White	1
1.5	084298	GLASSY frontal plate Black	1
2	053897	Plate fixation screws	2
3	878680	Cap sensor	1
4	879208	Counter plate	1
5	878681	Servomotor block	

TRIBE

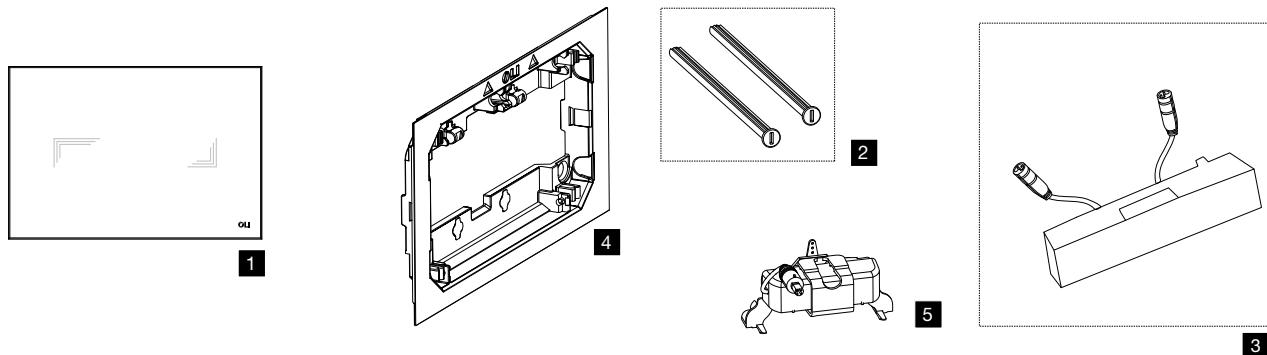


Nr.	Code	Description	Qt.	Code
1	879181	TRIBE frontal plate Gold plated	1	
1.1	879182	TRIBE frontal plate Black	1	
1.2	879183	TRIBE frontal plate White	1	
1.3	879184	TRIBE frontal plate Red	1	
1.4	879185	TRIBE frontal plate Anthracite	1	
1.5	879186	TRIBE frontal plate Taupe	1	
2	053897	Plate fixation screws	2	
3	878680	Cap sensor	1	
4	879208	Counter plate	1	
5	878681	Servomotor block	1	

TRUMPET




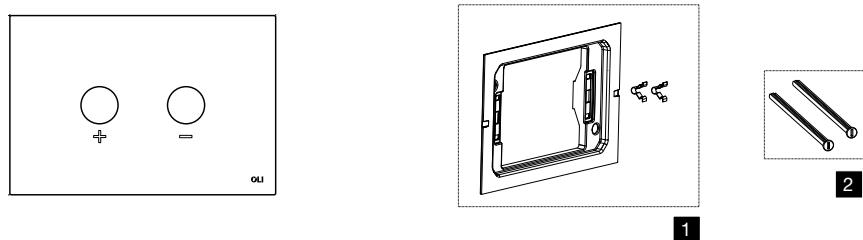


Nr.	Code	Description	Qt.	Code
1	090446	Counter plate	1	
2	053897	Plate fixation screws	2	






OCEANIA

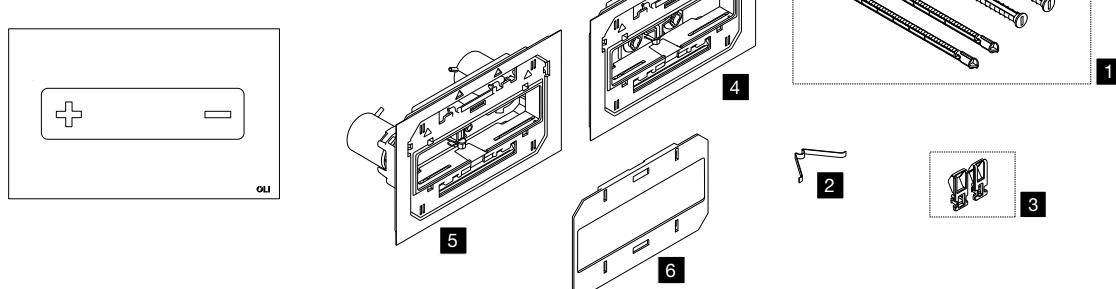







Nr.	Code	Description	Qt.	Code
1	131989	Control plate activation and fixation screws	4	
2	053865	Springs	10	
3	049963	Outlet valve extension kit	10	
4	053868	Mechanic counter plate	1	
5	053869	Pneumatic counter plate	1	
6	053871	Base	1	

PLAIN


Nr.	Code	Description	Qt.	Code
1	131989	Control plate activation and fixation screws	4	
2	011986	Springs	10	
3	069205	Counter plate	1	


GLAM

5

4

Nr.	Code	Description	Qt.	Code
1	131989	Control plate activation and fixation screws	4	
2	011986	Springs	10	
3	069205	Counter plate	1	
4	181715	Counter plate OLIpure	1	
5	181716	OLIpure nozzle	1	

NARROW

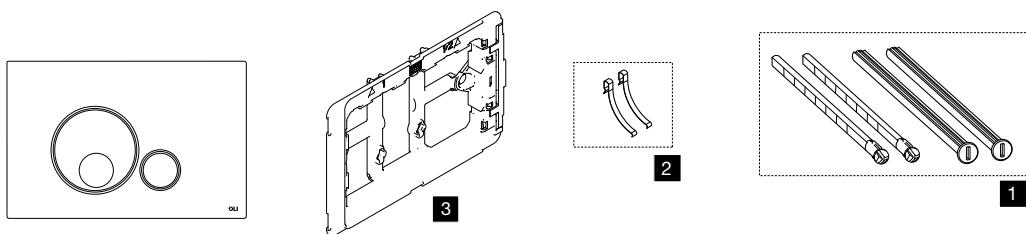1

5

4


Nr.	Code	Description	Qt.	Code
1	131989	Control plate activation and fixation screws	4	
2	011986	Springs	10	
3	069205	Counter plate	1	
4	181715	Counter plate OLIpure	1	
5	181716	OLIpure nozzle	1	

GLOBE




Nr.	Code	Description	Qt. Code
1	131989	Control plate activation and fixation screws	4
2	011986	Springs	10
3	069205	Counter plate	1

INO-X

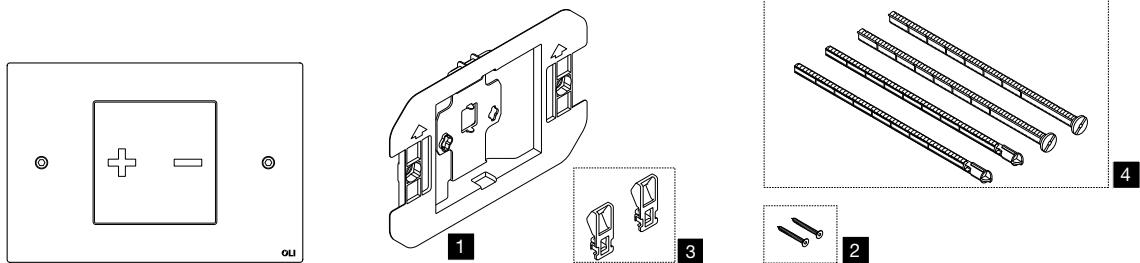




Nr.	Code	Description	Qt. Code
1	010088	Counter plate	1
2	058424	Stainless steel screw M4 X 25	2
3	049963	Outlet valve extension kit	10
4	049962	Screws for fixation and activation	4

SM15

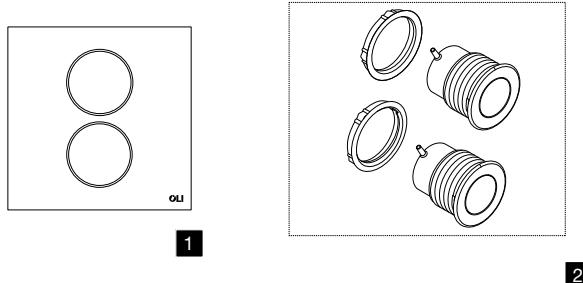

Nr.	Code	Description	Qt. Code
1	056980	SM15 front plate	1
2	056982	Pneumatic push button	2

TREND






1

2


3

Nr.	Code	Description	Qt. Code
1	056982	Pneumatic push button	2
2	058424	Stainless steel screw M4 X 25	2
3	011191	Plate fixation screws	2


SLIM



2





1



Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	037152	Fixation kit <09	2
3	011986	Springs	10
4	011637	Lever set	2
5	041673	Counter plate >09	1

BLINK




1




Nr.	Code	Description	Qt. Code
1	090446	Control plate	1
2	053897	Plate fixation screws	2

iPLATE

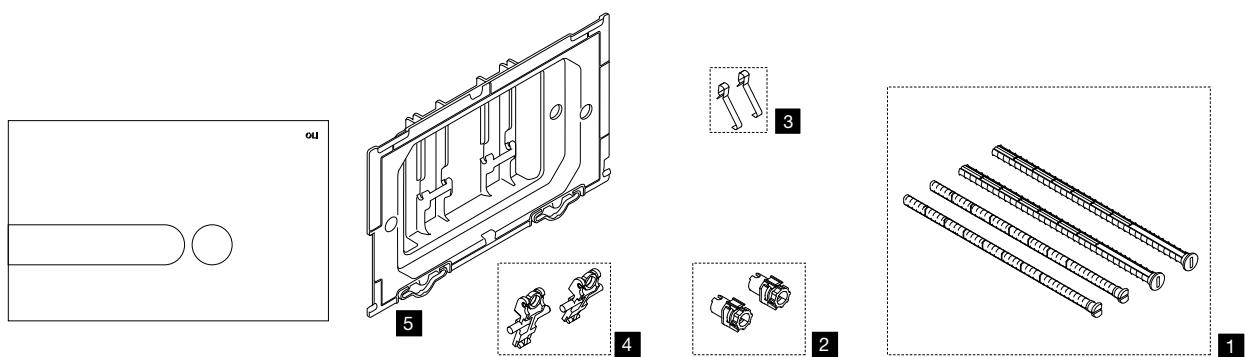


Nr.	Code	Description	Qt.	Code
1	037150	Control plate activation and fixation screws	4	
2	037152	Fixation kit <09	2	
3	011986	Springs	10	
4	041693	Lever set	2	
5	041691	Counter plate	1	


RIA

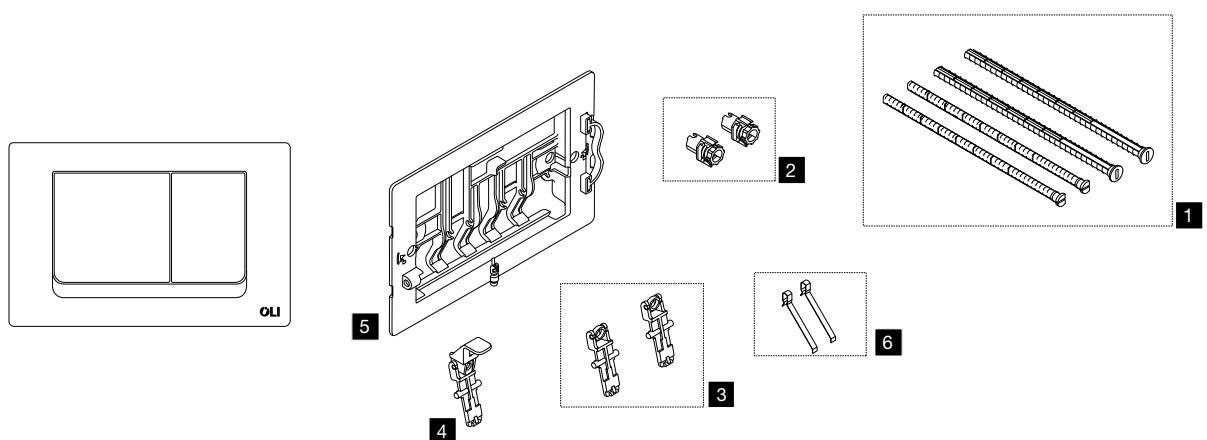

Nr.	Code	Description	Qt.	Code
1	037150	Control plate activation and fixation screws	4	
2	037152	Fixation kit <09	2	
3	056676	Lever set	2	
4	041687	Lever set Stop	1	
5	041676	Counter plate >09	1	
6	041682	Springs	10	

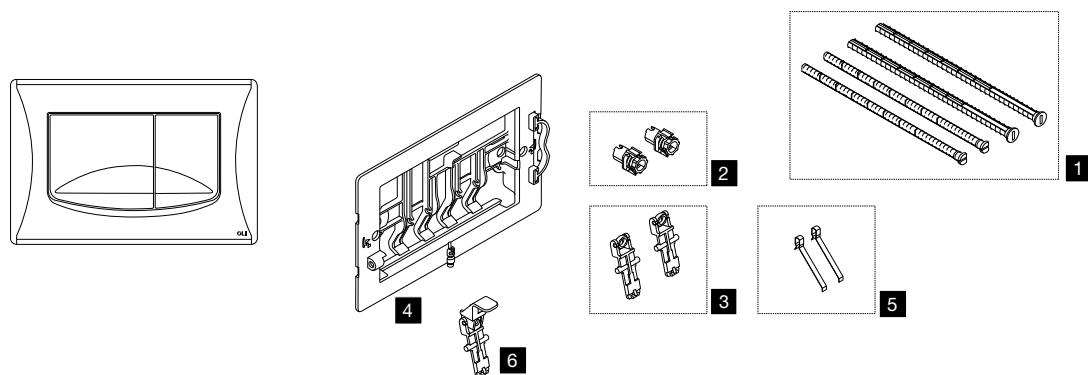
RIVER


Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	037152	Fixation kit <09	2
3	056676	Lever set	2
4	041676	Counter plate >09	1
5	041682	Springs	10
6	041687	Lever set stop	1

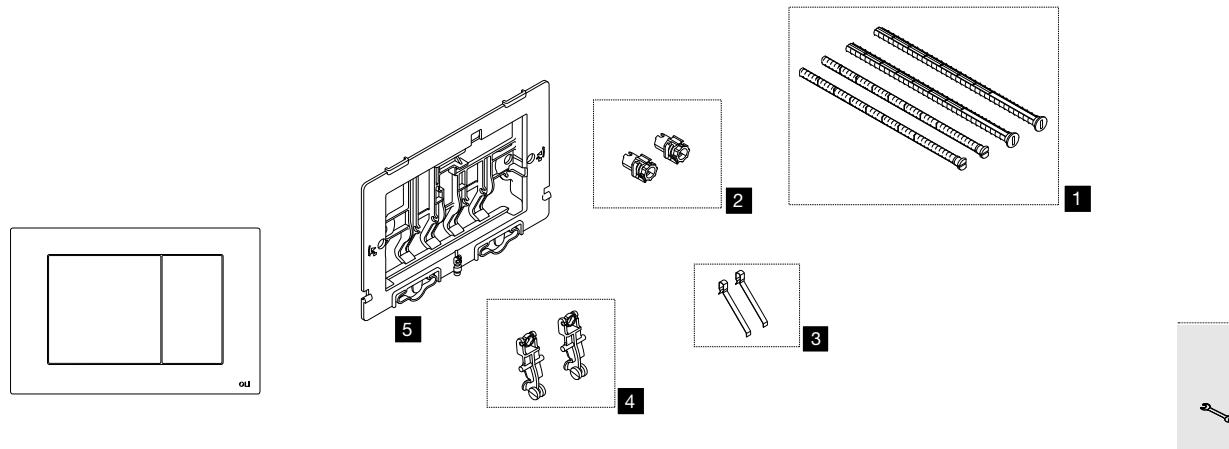METAL


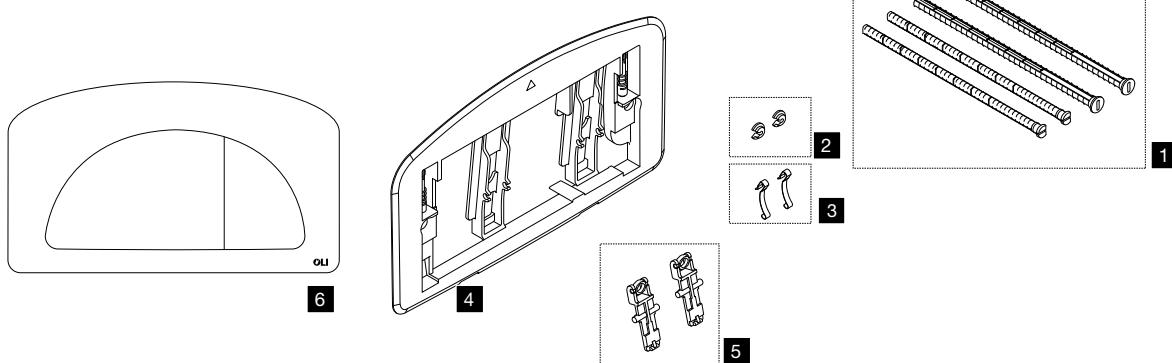
Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	037152	Fixation kit <09	2
3	041682	Springs	10
4	037303	Lever set	2
5	041689	Counter plate >09	1

CLASSIC

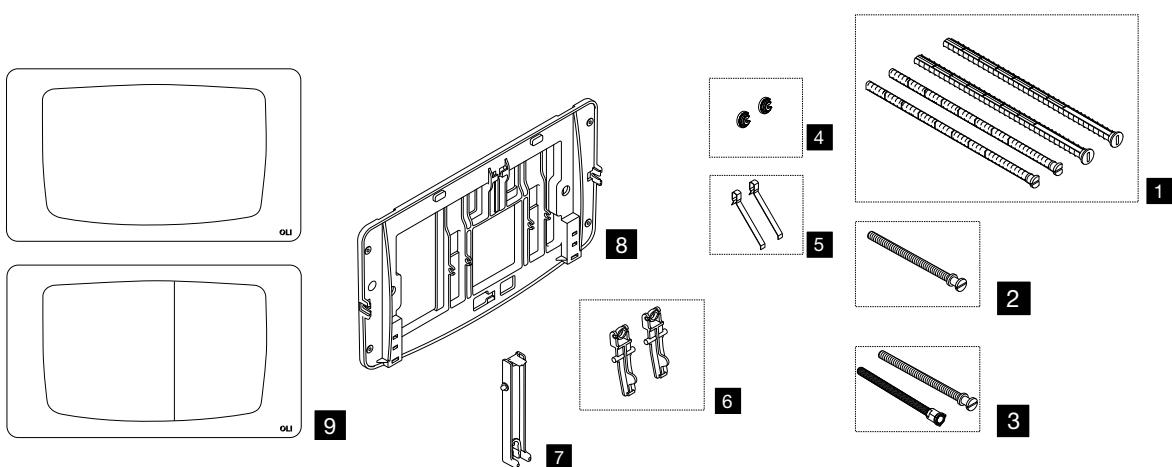


Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	049975	Actuation screws single flush	10
3	036921	Actuation screws single flush and prolongation	2
4	056973	Fixation washer <12	2
5	058833	Springs	10
6	037578	Lever set	2
7	054594	Start/stop control plate lever	1
8	049983	Counter plate	1
9	627401	Brushed stainless steel control plate dual flush	1


DUAL




Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	056973	Fixation washer <12	2
3	011986	Springs	10
4	049981	Counter plate	1
5	049985	Lever set	2
6	627001	White control plate	1
6.1	627004	Polished chrome control plate	1

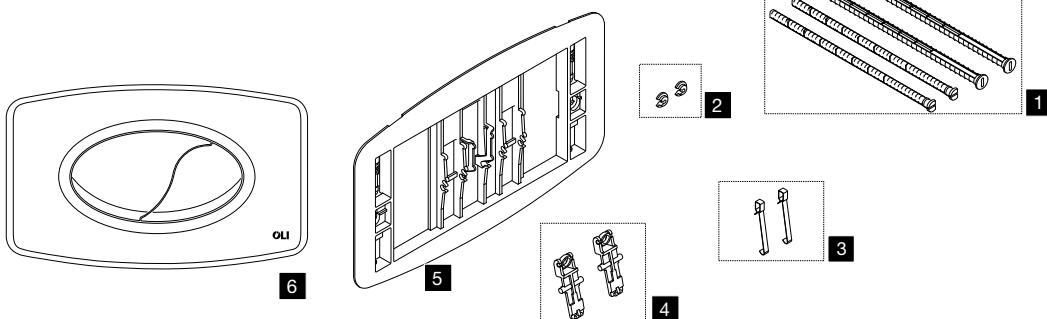ORIENTE


Nr.	Code	Description	Qt. Code
1	037150	Control plate activation and fixation screws	4
2	056973	Fixation washer <12	2
3	011986	Springs	10
4	049985	Lever set	2
5	049982	Counter plate	1
6	635161	White control plate	1

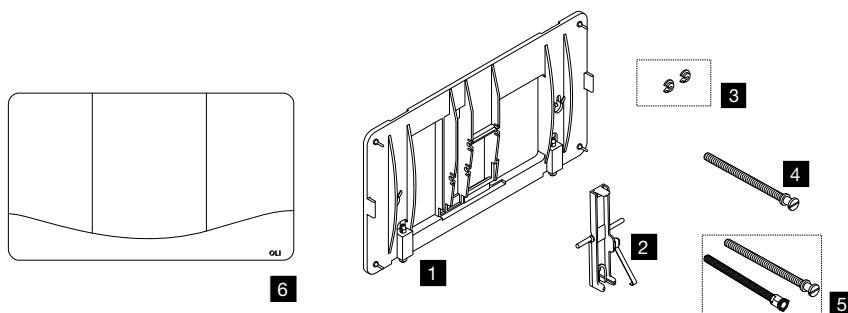
GIADA


Nr.	Code	Description	Qt. Code
1	009687	Counter plate	1
2	049980	Lever set	1
3	056973	Fixation washer <12	2
4	049975	Actuation screws single flush	10
5	036921	Actuation screws single flush and prolongation	1
6	014861	White control plate	1

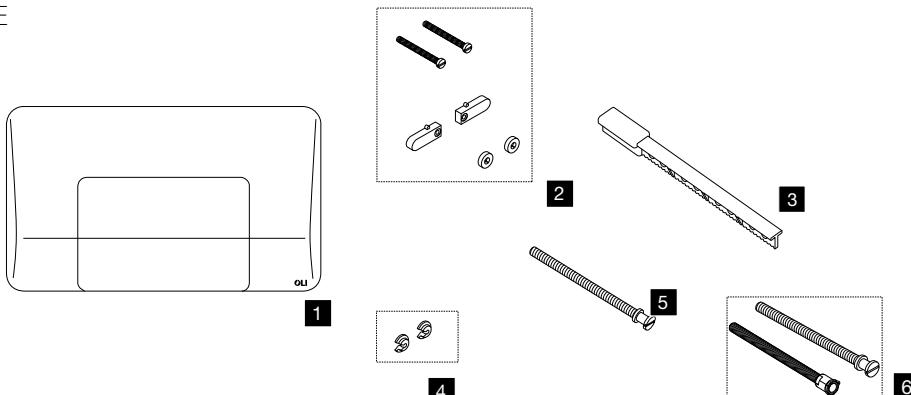DIAMANTE


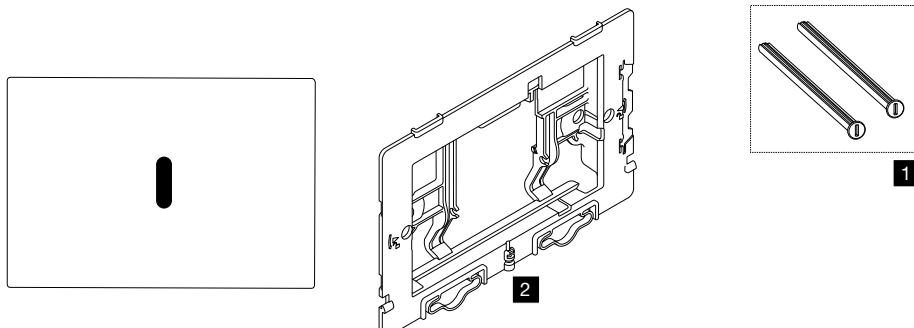
Nr.	Code	Description	Qt. Code
1.1	050023	DIAMANTE control plate White	1
1.2	050024	DIAMANTE control plate Chrome	1
1.3	050226	DIAMANTE control plate Satin chrome	1
2	015639	Fixation kit <99	1
3	049971	Lever extension	10
4	056973	Fixation washer <12	2
5	049975	Actuation screws single flush	10
6	036921	Actuation screws single flush and prolongation	1

STREAM

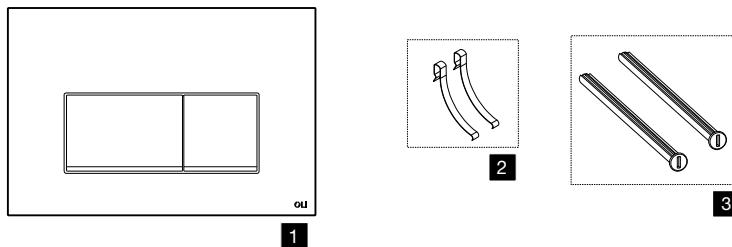


Nr.	Code	Description	Qt. Code
1	011602	Stream control plate Chrome	1
1.1	011601	Stream control plate White	1
2	054596	Springs	10
3	053897	Control plate fixation screws	2

ELETTRONIC




Nr.	Code	Description	Qt. Code
1	053897	Control plate fixation screws	2
2	050202	Counter plate	2

GLOBE URINAL

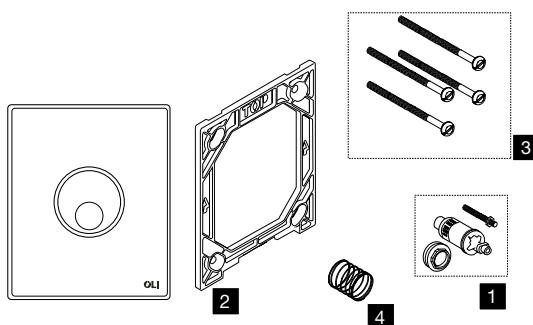


Nr.	Code	Description	Qt. Code
1	878916	Fluxometer cartridge and activation screw	1
2	878917	Counter plate	1
3	878918	Fixation screws	4
4	878919	Spring	1

ELECTRA URINAL

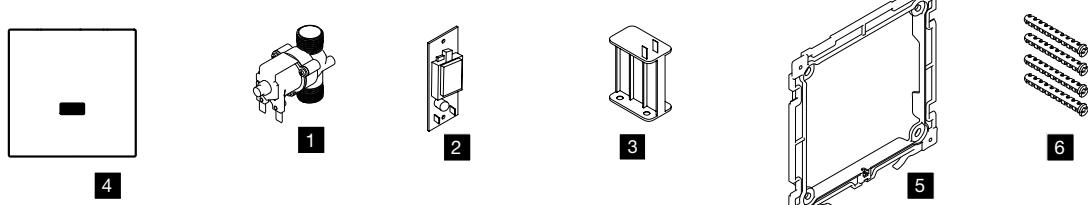


Nr.	Code	Description	Qt. Code
1	183026	Solenoid valve	1
2	183027	Controller	1
3	183035	Battery holder	1
4	183036	Control plate front + sensor	1
5	183038	Counter plate	1
6	183040	Accessories	1

eAQUA URINAL

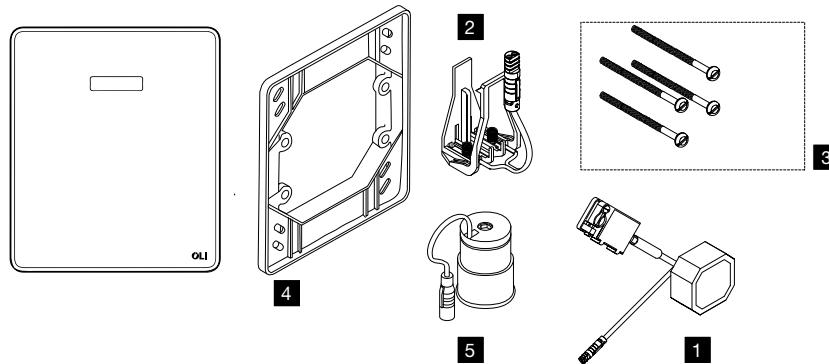


Nr.	Code	Description	Qt. Code
1	879134	Concealed mains power supply 230VAC/6VDC	1
2	879133	Battery holder	1
3	879132	Fixation screws	4
4	879131	Counter plate	1
5	879128	Electrovalve 6V/3W	1

SM15 URINAL

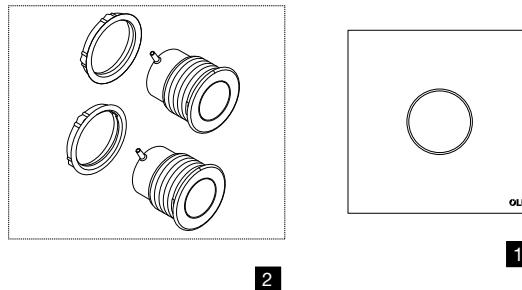



Nr.	Code	Description	Qt. Code
1	054723	SM15 Urinal front plate	1
2	056982	Pneumatic push button	2

URINAL





Nr.	Code	Description	Qt. Code
1	879140	Urinal complete set	1

ELECTRA I

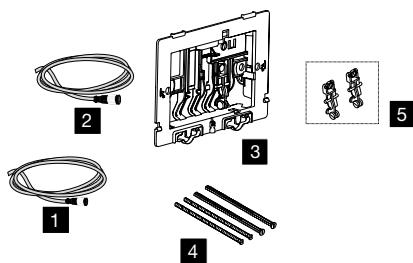



Nr.	Code	Description	Qt.	Code
1	182914	Power cable	1	
2	183025	Remote control cable	1	
3	041689	Counter plate	1	
4	037150	Control plate activation and fixation screws	2	
5	037303	Lever set	1	

ELECTRA II

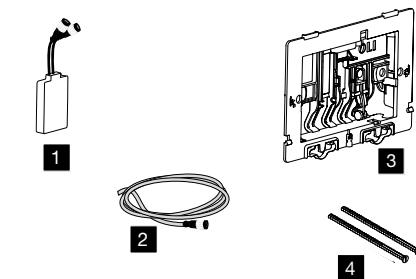


Nr.	Code	Description	Qt.	Code
1	183027	Sensor	1	
2	182914	Power cable	1	
3	041689	Counter plate	1	
4	053897	Plate fixation screws	2	

ELECTRA III

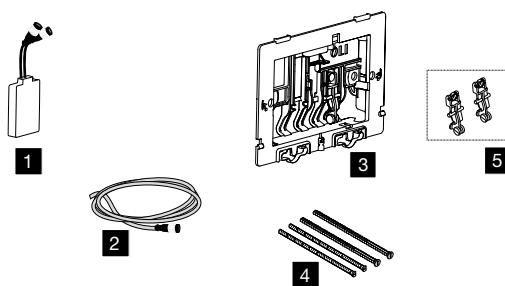


Nr.	Code	Description	Qt.	Code
1	183027	Sensor	1	
2	182914	Power cable	1	
3	041689	Counter plate	1	
4	037150	Control plate activation and fixation screws	2	
5	037303	Lever set	1	

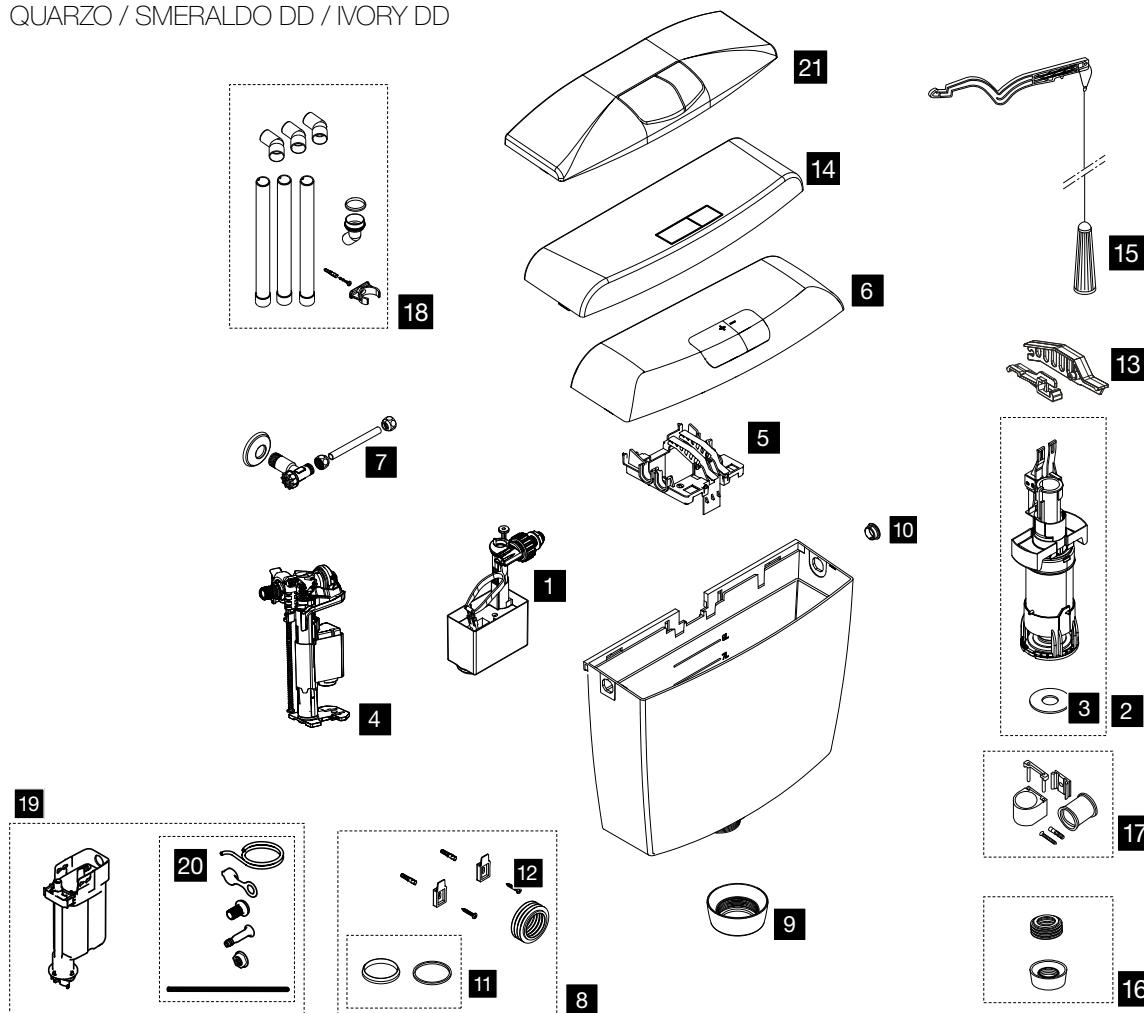QUARZO / SMERALDO DD / IVORY DD


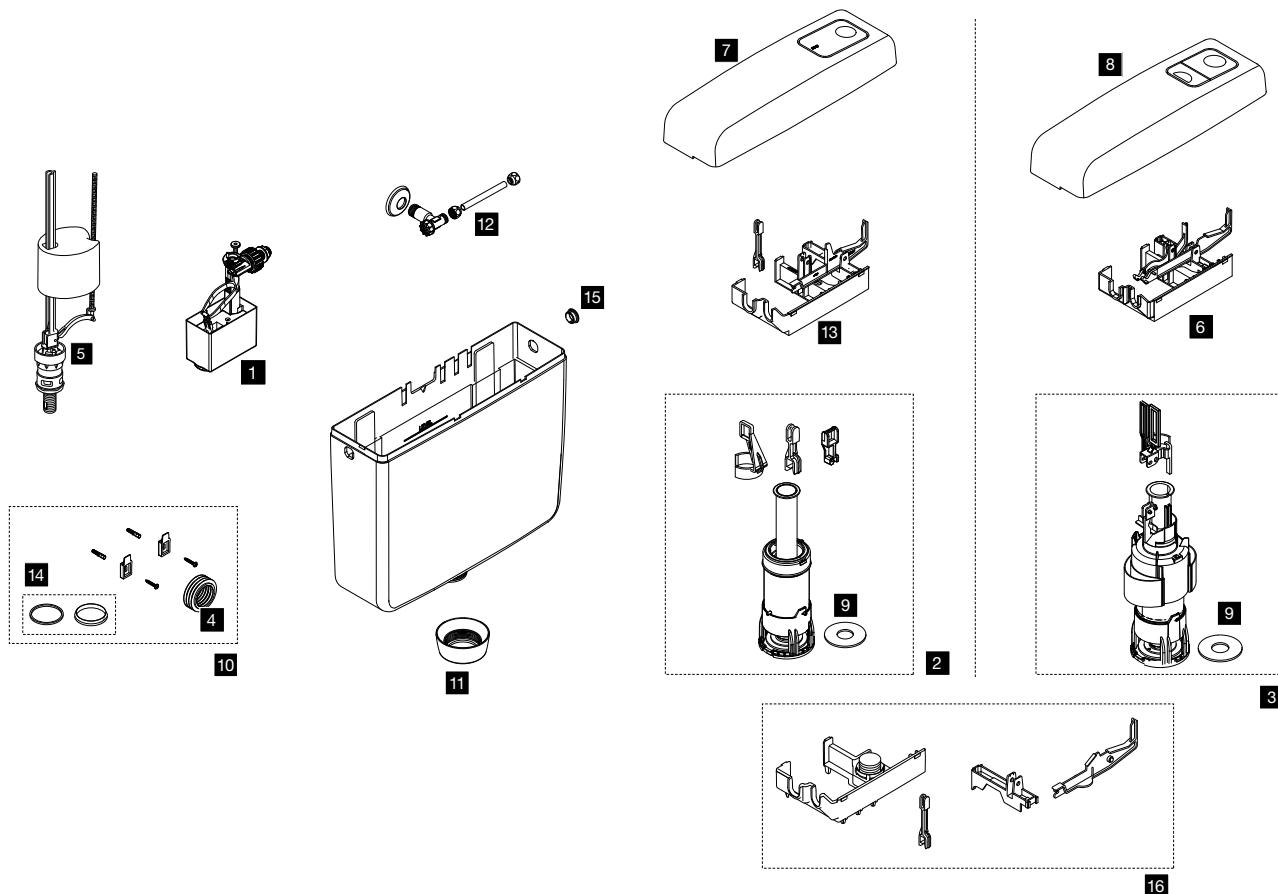
Nr.	Code	Description	Qt. Code
1	011994	Side inlet valve 3/8	1
2	525023	Outlet valve	1
3	049484	Outlet valve seal 60X23.8X2.7	10
4	183050	Inlet valve 3/8 OLIpure side	1
5	011995	Lever block	1
6	154845	QUARZO White lid	1
7	030859	Stop valve 1/2X3/8	1
8	049888	Accessories Ø40	1
9	030858	Nut flush White	1
10	049519	Side White cover	10
11	053386	Conical seal for flush pipe	1
12.1	622803	Rubber seal Ø45	5
12.2	622802	Rubber seal Ø40	5
12.3	622801	Rubber seal Ø32	5
13	092064	Anchors single flush	1
14	499323	IVORY DD White lid	1
15	011998	Chain nylon	1
16	022389	Nut flush White Ø32 high position	1
17	049543	Fixation kit for flush pipes	1
18	490882	Complete flush pipe Ø32	1
19	183049	OLIpure kit + accessories	1
20	183048	OLIpure accessories	1
21	005989	SMERALDO DD White lid	1

ONIX PLUS 2 IN 1

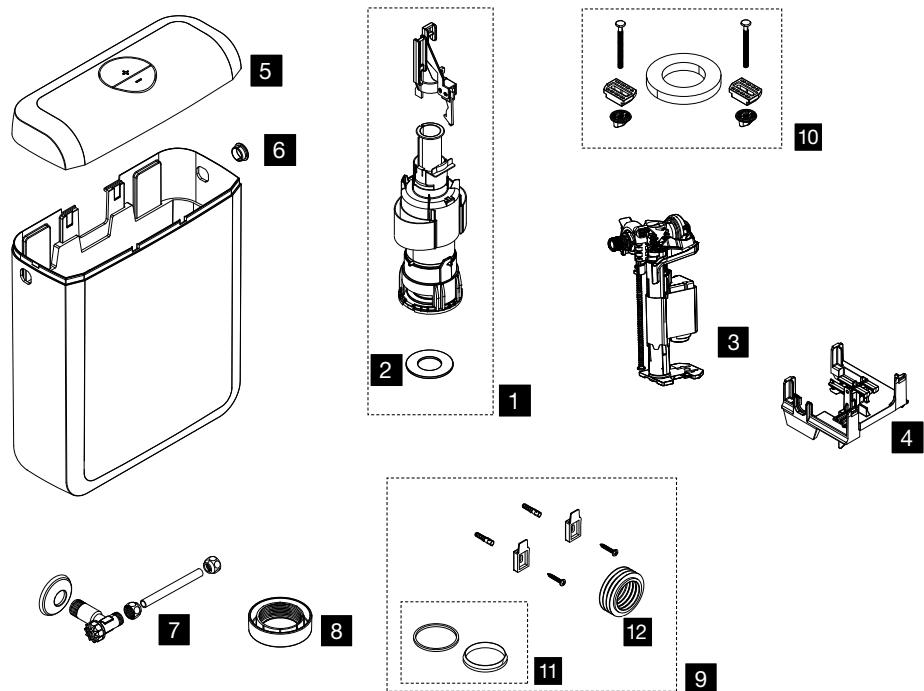


Nr.	Code	Description	Qt. Code
1	011698	Outlet valve	1
2	049484	Outlet valve seal 60X23.8X2.7	10
2.1	011699	Seal ONIX outlet valve 63X32X2.7	10
3	037182	Inlet valve 3/8 ONIX PLUS	1
4	011987	Lever block	1
5	011697	ONIX LID	1
6	049519	Side White cover	10
7	030859	Stop valve 1/2X3/8	1
8	037168	White exposed cistern nut	1
9	049888	Accessories Ø40	1
10	037163	Accessories kit for close-coupled	1
11	053386	Conical seal for flush pipe	1
12.1	622803	Rubber seal Ø45	5
12.2	622802	Rubber seal Ø40	5
12.3	622801	Rubber seal Ø32	5

TOPAZIO DD / TOPAZIO




Nr.	Code	Description	Qt. Code
1	011994	Side inlet valve 3/8	1
2	011989	Start/stop TOPAZIO outlet valve	1
3	525106	Outlet valve TOPAZIO DD	1
4	622803	Rubber seal Ø45	5
4.1	622802	Rubber seal Ø40	5
4.2	622801	Rubber seal Ø32	5
5	563584	Inlet valve 3/8 bottom	1
6	011988	Lever block dual flush	1
7	000464	TOPAZIO White start/stop lid	1
8	008590	TOPAZIO DD white lid	1
9	049484	Outlet valve seal 60X23.8X2.7	10
10	049888	Accessories Ø40	1
11	030858	Nut flush White	1
12	030859	Stop valve 1/2X3/8	1
13	011990	Lever block interruptible flush	1
14	053386	Conical seal for flush pipe	1
15	049519	Side White cover	10
16	087617	Pneumatic block	1

HAVANA

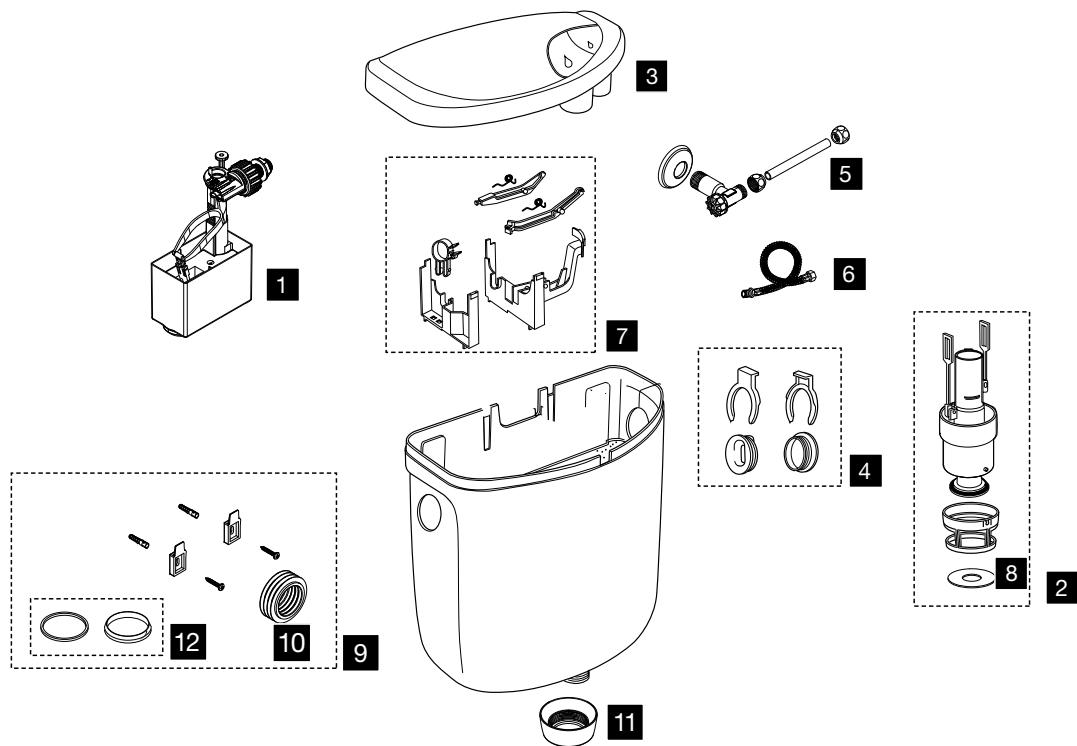


Nr.	Code	Description	Qt. Code
1	011994	Side inlet valve 3/8	1
2	034173	Outlet valve	1
3	013140	HAVANA White lid	1
4	037194	Side White cover	2
5	030859	Stop valve 1/2X3/8	1
6	037191	Flexible hose 3/8X3/8	1
7	028379	Lever block	1
8	037188	Outlet valve seal	10
9	049888	Accessories Ø40	1
10	622803	Rubber seal Ø45	5
10.1	622802	Rubber seal Ø40	5
10.2	622801	Rubber seal Ø32	5
11	030858	Nut flush White	1
12	053386	Conical seal for flush pipe	1

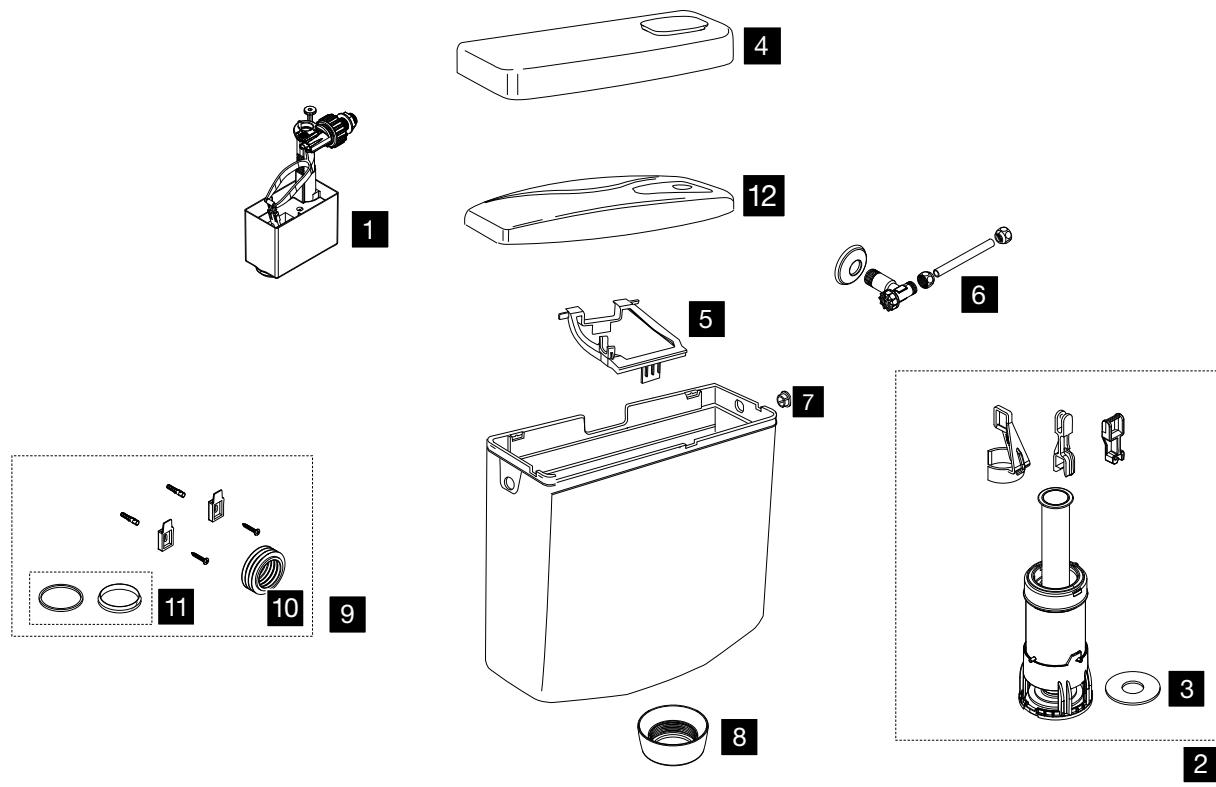


Nr.	Code	Description	Qt. Code
1	011994	Side inlet valve 3/8	1
2	011989	Start/stop TOPAZIO outlet valve	1
3	049484	Outlet valve seal 60X23.8X2.7	10
4	012937	GEMMA White LID	1
5	037197	Central Block	1
6	030859	Stop valve 1/2X3/8	1
7	049519	Side White cover	10
8	030858	Nut flush White	1
9	049888	Accessories Ø40	1
10	622803	Rubber seal Ø45	5
10.1	622802	Rubber seal Ø40	5
10.2	622801	Rubber seal Ø32	5
11	053386	Conical seal for flush pipe	1
12	054388	IVORY White lid	1



ZAFFIRO

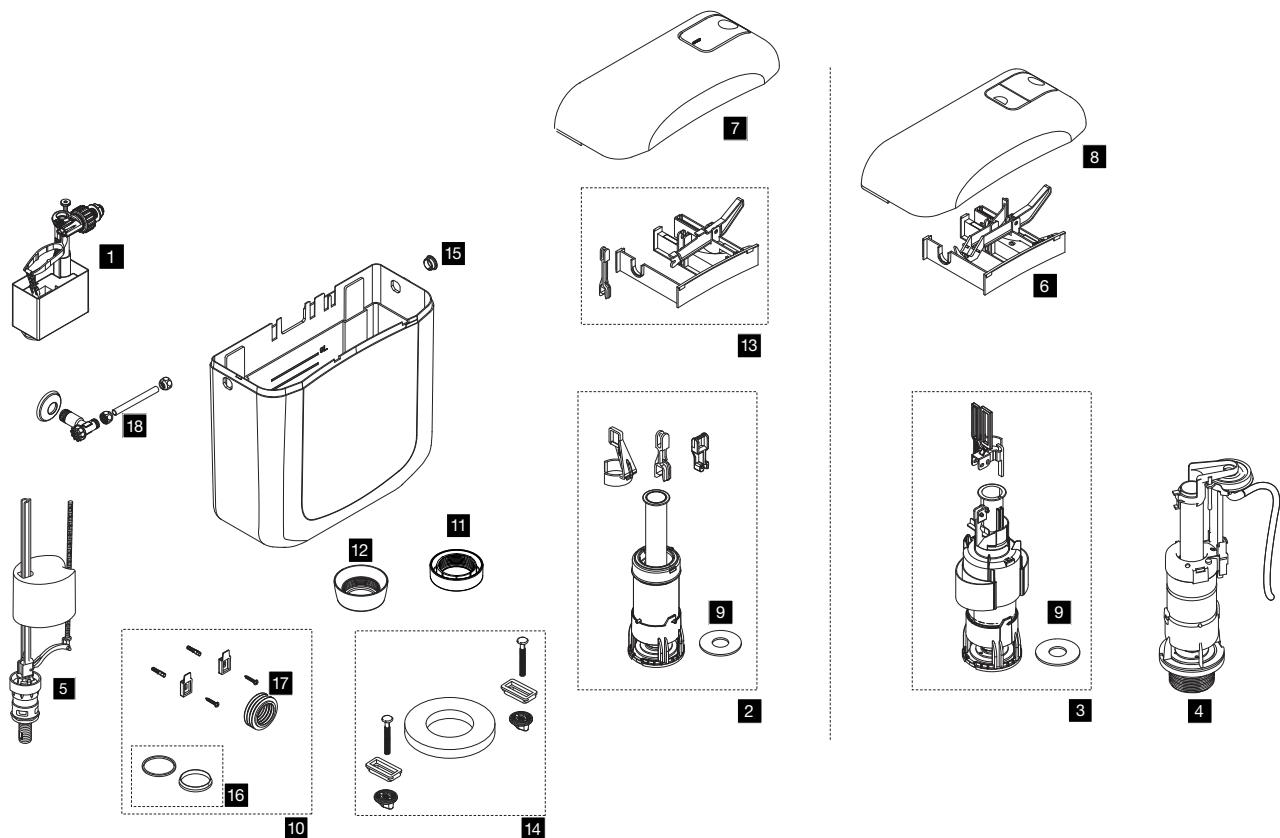


Nr.	Code	Description	Qt.	Code
1	011991	Side inlet valve 3/8	1	
2	011989	Start/stop TOPAZIO outlet valve	1	
3	525106	Outlet valve TOPAZIO 2	1	
4	049948	Pneumatic outlet valve	1	
5	563584	Inlet valve 3/8 bottom	1	
6	011992	Dual flush lever block	1	
7	012936	ZAFFIRO White start/stop lid	1	
8	008607	ZAFFIRO White lid dual flush	1	
9	049484	Outlet valve seal 60X23.8X2.7	10	
10	049888	Accessories Ø40	1	
11	037168	White exposed cistern nut > 18	1	
12	030858	Nut flush white < 18		
13	049524	Start/stop lever block	1	
14	0049521	Accessories kit for close-coupled	1	
15	049519	Side White cover	10	
16	053386	Conical seal for flush pipe	1	
17	622803	Rubber seal Ø45	5	
17.1	622802	Rubber seal Ø40	5	
17.2	622801	Rubber seal Ø32	5	
18	030859	Stop valve 1/2X3/8	1	

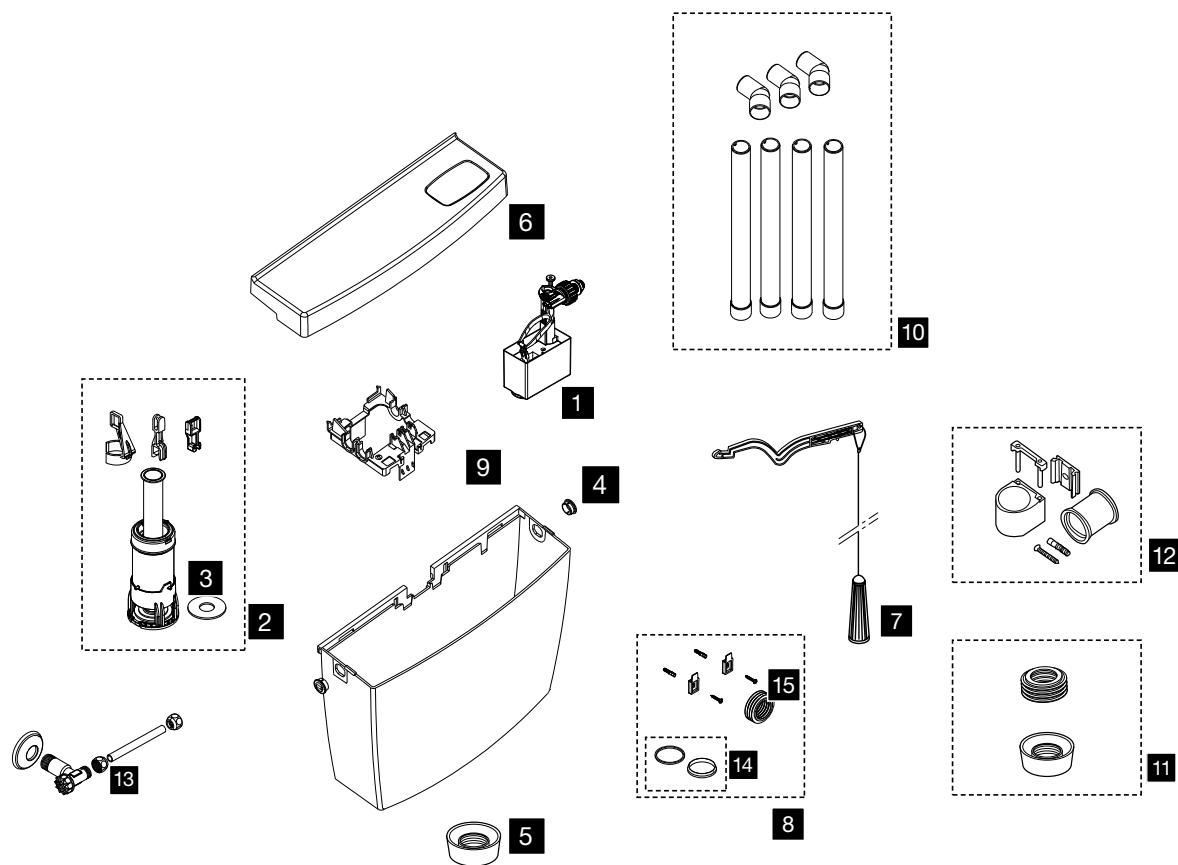


Nr.	Code	Description	Qt.	Code
1	011994	Side inlet valve 3/8	1	
2	011989	Start/stop TOPAZIO outlet valve	1	
3	049484	Outlet valve seal 60X23.8X2.7	10	
4	049519	Side White cover	10	
5	030858	Nut Flush White	1	
6	011996	White lid	1	
7	011998	Chain	1	
8	049888	Accessories Ø40	1	
9	011999	Lever block	1	
10	490882	Complete flush pipe Ø32	1	
11	022389	Nut flush White Ø32	1	
12	049543	Fixation kit for flush pipes	1	
13	030859	Stop valve 1/2X3/8	1	
14	053386	Conical seal for flush pipe	1	
15	622803	Rubber seal Ø45	5	
15.1	622802	Rubber seal Ø40	5	
15.2	622801	Rubber seal Ø32	5	

OUTLET VALVES

		1		4 (110x68x15)		5 (85x57x8)		Buttons	 14
	Code 023425	2.1 Code 023400 (30mm) 2.2 Code 049738 (43mm)	Code 053826	Code 047922	6 Code 049484 (60x23.8x2.7)	 15 Code 096003	Code 057994		
	Code 023425	2.1 Code 023400 (30mm) 2.2 Code 049738 (43mm)	Code 053826	Code 047922	6 Code 049484 (60x23.8x2.7)	 8 Code 048514	Code 057994		
	Code 023425	2.1 Code 023400 (30mm) 2.2 Code 049738 (43mm)	Code 053826	Code 047922	6 Code 049484 (60x23.8x2.7)	 9 Code 036905	Code 057994		
	Code 023425	2.1 Code 023400 (30mm) 2.2 Code 049738 (43mm)	Code 053826	Code 047922	6 Code 049484 (60x23.8x2.7)	 10 Code 033767	Code 057994		
	Code 023425	3.1 Code 011919 (30mm) 3.2 Code 013666 (43mm)	Code 053826	Code 047922	7 Code 049506 (60x26.5x2.7)	 11 Code 054230 >2012			
	Code 023425	3.1 Code 011919 (30mm) 3.2 Code 054599 (43mm)	Code 053826	Code 047922	7 Code 049506 (60x26.5x2.7)	 12 Code 054600 >2012  13 Code 021184 >2012			


Nr.	Code	Description	Qt. Code
1	023425	Cistern fixation kit M6X100 stainless steel	1
2.1	023400	Close-coupled outlet valve guide	1
2.2	049738	Medium level ceramic cisterns outlet valve guide	1
3.1	011919	Outlet valve guide for ATLAS close-coupled	1
3.2	013666	Medium level ceramic cisterns ATLAS outlet valve guide	1
4	053826	Foam seal 110X68X15 for WC pan	5
5	047922	Foam seal for outlet valve guide 85X57X8	2
6	049484	Outlet valve seal 60X23.8X2.7	10
7	049506	Atlas outlet valve seal 60x26.5x2	10
8	048514	PUSH ECO push button	1
9	036905	ECO TRETTE push button	1
10	033767	HANDLE push button	1
11	054230	ATLAS push buttons >12	1
12	054600	ATLAS CABLE push buttons >12	1
13	021184	Cable for ATLAS CABLE	1
14	057994	Chrome pipe kit for medium level ceramic cisterns	1
15	096003	Fast start/stop push button	1

INLET VALVES

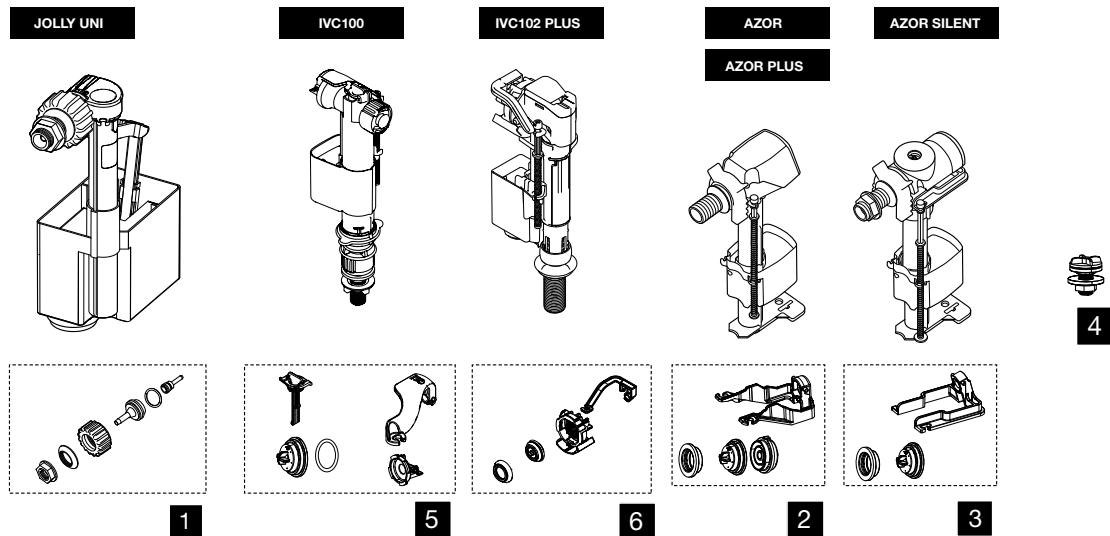

Nr.	Code	Description	Qt. Code
1	012002	Parts set JOLLY UNI	1
2	012001	Membrane kit for AZOR/AZOR PLUS	1
3	049494	Membrane kit for AZOR SILENT	1
4	058025	Bottom cover	1
5	878899	Membrane kit for IVC100	1
6	878824	Membrane kit for IVC102 PLUS	1

PNEUMATIC

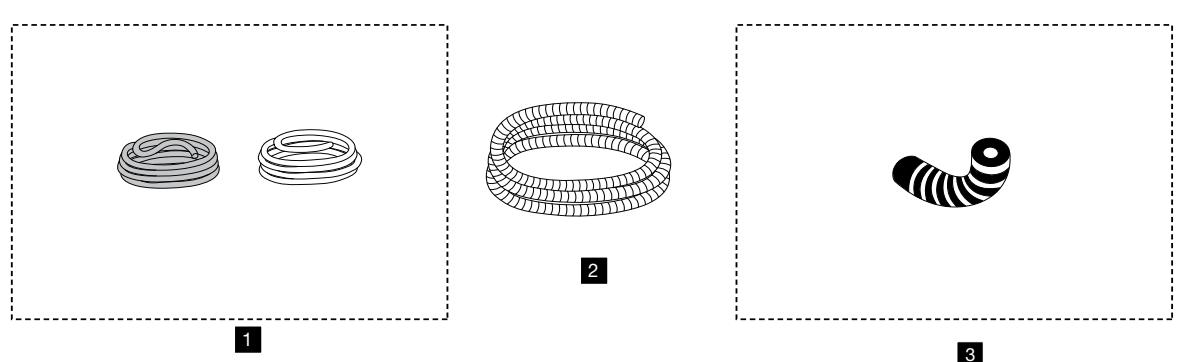

Nr.	Code	Description	Qt. Code
1	043234	3m PNEUMATIC PIPE (2x)	1
2	049544	1,8m PROTECTION PIPE	1
3	049594	PNEUMATIC PUSH BUTTON CONNECTION	10

PACKAGING DETAILS



Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

SANITARY MODULE
QR-INOX WHITE
HUNG WC

30	061565	QR-INOX White button Pneumatic hung wc	1185x545x282	30	x	x	30	5	1200x800x1570	152
30	878815	QR-INOX White no-touch cap Hydroboost hung wc	1185x545x282	30	x	x	30	5	1200x800x1570	152
30	878640	QR-INOX White no-touch cap AC hung wc	1185x545x282	30	x	x	30	5	1200x800x1570	152

FLOOR

30	061562	QR-INOX White button Pneumatic floor	1185x545x282	27	x	x	27	5	1200x800x1570	137
30	878835	QR-INOX White no-touch cap Hydroboost floor	1185x545x282	27	x	x	27	5	1200x800x1570	137
30	878642	QR-INOX White no-touch cap AC floor	1185x545x282	27	x	x	27	5	1200x800x1570	137

FREE-STANDING

30	879059	QR-INOX White Pneumatic Free-standing	x	x	x	x	x	x	x	x
30	879061	QR-INOX White no-touch cap Hydroboost Free-standing	x	x	x	x	x	x	x	x
30	879151	QR-INOX White no-touch cap AC Free-standing	x	x	x	x	x	x	x	x

QR-INOX BLACK
HUNG WC

31	061568	QR-INOX Black button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1200x800x1570	154
31	878834	QR-INOX Black no-touch cap Hydroboost hung wc	1185x545x282	31	x	x	31	5	1200x800x1570	154
31	878641	QR-INOX Black no-touch cap AC hung wc	1185x545x282	31	x	x	31	5	1200x800x1570	154

FLOOR

31	061563	QR-INOX Black button Pneumatic floor	1185x545x282	27	x	x	27	5	1200x800x1570	137
31	878836	QR-INOX Black no-touch cap Hydroboost floor	1185x545x282	27	x	x	27	5	1200x800x1570	137
31	878643	QR-INOX Black no-touch cap AC floor	1185x545x282	27	x	x	27	5	1200x800x1570	137

FREE STANDING

31	879060	QR-INOX Black Pneumatic Free-standing	x	x	x	x	x	x	x	x
31	879062	QR-INOX Black no-touch cap Hydroboost Free-standing	x	x	x	x	x	x	x	x
31	879152	QR-INOX Black no-touch cap AC Free-standing	x	x	x	x	x	x	x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg
------	------	-------------	---	-------	----	-----	---	-------	----	-----	---	-------	----

QR-INOX GOLD

32	878137	QR-INOX Gold button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
----	--------	--	--------------	----	---	---	----	---	---------------	-----

QR-INOX TAUPE

32	878164	QR-INOX Taupe button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
----	--------	---	--------------	----	---	---	----	---	---------------	-----

QR-INOX ANTHRACITE

33	878168	QR-INOX Anthracite button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
----	--------	--	--------------	----	---	---	----	---	---------------	-----

QR-INOX RED

33	878172	QR-INOX Red button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
----	--------	---	--------------	----	---	---	----	---	---------------	-----

QR TOTAL BLACK

HUNG WC										
34	878141	QR TOTAL Black button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
34	878147	QR TOTAL Black no-touch cap Hydroboost hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
34	878631	QR TOTAL Black no-touch cap AC hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154

FLOOR

34	878139	QR TOTAL Black button Pneumatic floor	1185x545x282	27	x	x	27	5	1570x800x1200	137
34	878140	QR TOTAL Black no-touch cap Hydroboost floor	1185x545x282	27	x	x	27	5	1570x800x1200	137
34	878630	QR TOTAL Black no-touch cap AC floor	1185x545x282	27	x	x	27	5	1570x800x1200	137

QR TOTAL WHITE

HUNG WC										
35	878152	QR TOTAL White button Pneumatic hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
35	878153	QR TOTAL White no-touch cap Hydroboost hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154
35	878633	QR TOTAL White no-touch cap AC hung wc	1185x545x282	31	x	x	31	5	1570x800x1200	154

FLOOR

35	878150	QR TOTAL White button Pneumatic floor	1185x545x282	27	x	x	27	5	1570x800x1200	137
35	878151	QR TOTAL White no-touch cap Hydroboost floor	1185x545x282	27	x	x	27	5	1570x800x1200	137
35	878632	QR TOTAL White no-touch cap AC floor	1185x545x282	27	x	x	27	5	1570x800x1200	137

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

EASY MOVE

37	005308	EASY MOVE		1490x800x220	49	x		x	x	5		1640x800x1200	245
37	601831	EASY MOVE glass White	x		14	x		x	x	x	x	x	x
37	601833	EASY MOVE glass Black	x		14	x		x	x	x	x	x	x
37	879143	Lift-up support rail + Toilet roll holder	x		x	x	x	x	x	x	x	x	x

OLI74 HAPPY AIR

40	101775	OLI74 PLUS Mechanic HAPPY AIR		586x126x680	4	x		x	4	45		2200x1000x1200	170
40	101772	HAPPY AIR FAN	x		x	x		x	x	x	x	x	x
40	048591	OLI74 PLUS Mechanic HAPPY AIR Simflex		910x150x640	8	x		x	8	26		2040x910x1180	198
40	101772	HAPPY AIR FAN	x		x	x		x	x	x	x	x	x
41	048590	OLI74 PLUS Mechanic HAPPY AIR Sanitarblock		1175x167x634	16	x		x	16	16		2229x835x1200	250
41	101772	HAPPY AIR FAN	x		x	x		x	x	x	x	x	x
41	101774	OLI74 PLUS Mechanic HAPPY AIR Free-standing Sanitarblock		1180X640X170	15	x		x	x	16		2229x835x1200	248
41	101772	HAPPY AIR FAN	x		x	x		x	x	x	x	x	x

OLI120 PLUS - Direct

48	099941	OLI120 PLUS Mechanic		670x150x460	4	x		x	4	45		2610x820x1200	179
48	152970	OLI120 PLUS Mechanic OLIpure		670x150x460	4	x		x	4	45		2610x820x1200	187
48	153964	OLI 120 PLUS Pneumatic		670x150x460	4	x		x	4	45		2610x820x1200	182
48	154075	OLI 120 PLUS Electronic		670x150x460	4	x		x	4	45		2610x820x1200	177
48	878843	OLI120 PLUS cap Hydroboost		670x150x460	4	x		x	4	45		2610x820x1200	182
48	878619	OLI120 PLUS cap AC		670x150x460	4	x		x	4	45		2610x820x1200	182

OLI120 PLUS - Simflex

48	099946	OLI120 PLUS Mechanic Simflex		915x450x160	9	x		x	9	35		2400x1000x1200	321
48	152971	OLI 120 PLUS Mechanic OLIpure Simflex		915x450x160	10	x		x	10	35		2400x1000x1200	339
48	154078	OLI 120 PLUS Pneumatic Simflex		915x450x160	9	x		x	9	35		2340x1000x1200	326
48	154079	OLI 120 PLUS Electronic Simflex		915x450x160	9	x		x	9	35		2340x1000x1200	321
48	878844	OLI120 PLUS cap Hydroboost Simflex		915x450x160	9	x		x	9	35		2340x1000x1200	321
48	878620	OLI120 PLUS cap AC Simflex		915x450x160	9	x		x	9	35		2340x1000x1200	321

Page	Code	Description	WxDxH	 Kg	Qt.	WxDxH	 Kg	Qt.	HxDxW	 Kg	
OLI120 PLUS - Block											
49	151339	OLI120 PLUS Mechanic Block	486x161x1070	8	x	x	8	26	2210x1000x1200	212	
49	153798	OLI120 PLUS Mechanic OLIpure Block	486x161x1070	8	x	x	8	26	2210x1000x1200	217	
49	154076	OLI120 PLUS Pneumatic Block	486x161x1070	8	x	x	8	26	2210x1000x1200	216	
49	154077	OLI120 PLUS Electronic Block	486x161x1070	8	x	x	8	26	2210x1000x1200	213	
49	878845	OLI120 PLUS cap Hydroboost Block	486x161x1070	8	x	x	8	26	2210x1000x1200	213	
49	878623	OLI120 PLUS cap AC Block	486x161x1070	8	x	x	8	26	2210x1000x1200	213	
OLI120 PLUS - Sanitarblock											
49	099949	OLI120 PLUS Mechanic Sanitarblock	1180x140x530	15	x	x	15	20	2280x840x1200	302	
49	152972	OLI120 PLUS Mechanic OLIpure Sanitarblock	1180x140x530	16	x	x	16	20	2270x800x2270	314	
49	135980	OLI120 PLUS Mechanic Sanitarblock SHT - colocar asterisco	1180x140x530	15	x	x	15	20	2280x800x1200	309	
49	177306	OLI120 PLUS Pneumatic Sanitarblock	1180x140x530	15	x	x	15	20	2280x840x1200	305	
49	177305	OLI120 PLUS Electronic Sanitarblock	1180x140x530	15	x	x	15	20	2280x840x1200	303	
49	878846	OLI120 PLUS cap Hydroboost Sanitarblock	1180x140x530	15	x	x	15	20	2280x840x1200	303	
49	878621	OLI120 PLUS cap AC Sanitarblock	1180x140x530	15	x	x	15	20	2280x840x1200	303	
OLI120 PLUS - Free-standing											
50	099952	OLI120 PLUS Mechanic Free-standing	1180x140x530	18	x	x	18	20	2280x840x1200	358	
50	152973	OLI120 PLUS Mechanic OLIpure Free-standing	1180x140x530	18	x	x	18	20	2280x840x1200	362	
50	099951	OLI120 PLUS Pneumatic Free-standing Sanitarblock	1180x140x530	18	x	x	18	20	2280x840x1200	354	
50	099943	OLI120 PLUS Electronic Free-standing Sanitarblock	1180x140x530	18	x	x	18	20	2280x840x1200	352	
50	878847	OLI120 PLUS cap Hydroboost Free-standing	1180x140x530	18	x	x	18	20	2280x840x1200	352	
50	878622	OLI120 PLUS cap AC Free-standing	1180x140x530	18	x	x	18	20	2280x840x1200	352	
OLI120 PLUS - Height adjustable Sanitarblock											
50	154083	OLI120 PLUS Mechanic height adjustable Sanitarblock	1180x140x530	19	x	x	19	20	2280x840x1200	379	

Page	Code	Description	WxDxH	Kg	Qt.	WxDxH	Kg	Qt.	HxDxD	Kg
OLI120 - Direct										
54	097945	OLI120 Mechanic	670x150x460	4	x	x	4	45	2610x820x1200	175
54	097946	OLI120 Mechanic Simflex	915x450x160	10	x	x	10	35	2410x1000x1200	334
55	097947	OLI120 Mechanic Sanitarblock	1180x140x530	15	x	x	15	20	2280x800x1200	303
OLI74 PLUS - Direct										
58	601601	OLI74 PLUS Mechanic	586x126x680	4	5	656x596x707	22	45	2281x1192x1312	243
58	877961	OLI74 PLUS Mechanic 2 inlet valves	586x126x680	4	5	656x596x707	22	45	2281x1192x1312	243
58	152976	OLI74 PLUS Mechanic OLIpure	586x126x680	4	5	656x596x707	22	45	2200x1000x1200	243
58	601602	OLI74 PLUS Pneumatic	586x126x680	4	5	656x596x707	22	45	2281x1192x1312	243
58	077715	OLI74 PLUS Electronic	586x126x680	4	5	656x596x707	22	45	2200x1000x1200	243
58	878838	OLI74 PLUS cap Hydroboost	586x126x680	x	5	656x596x707	22	45	2200x1000x2200	243
58	878624	OLI74 PLUS cap AC	586x126x680	x	5	656x596x707	22	45	2200x1000x2200	243
OLI74 PLUS - Sinflex										
58	601901	OLI74 PLUS Mechanic Simflex	910x150x640	8	x	x	8	26	2230x910x1280	203
58	878929	OLI74 PLUS Mechanic Simflex 2 inlet valves	910x150x640	8	x	x	8	26	2230x910x1280	203
58	152977	OLI74 PLUS Mechanic OLIpure Simflex	910x150x640	8	x	x	8	26	2230x910x1280	204
58	002332	OLI74 PLUS Pneumatic Simflex	910x150x640	8	x	x	8	26	2230x910x1280	203
58	077736	OLI74 PLUS Electronic Simflex	910x150x640	8	x	x	8	26	2230x910x1280	200
58	878839	OLI74 PLUS cap Hydroboost Simflex	910x150x640	8	x	x	8	26	2230x910x1280	200
58	878625	OLI74 PLUS cap AC Simflex	910x150x640	8	x	x	8	26	2230x910x1280	200
OLI74 PLUS - Sanitarblock S90										
59	601803	OLI74 PLUS Mechanic S90 Sanitarblock	805x146x640	15	x	x	8	26	2230x910x1280	204
59	187648	OLI74 PLUS Mechanic OLIpure S90 Sanitarblock	1180x140x530	15	x	x	15	20	2230x800x1200	295
59	187649	OLI74 PLUS Pneumatic S90 Sanitarblock	1180x140x530	15	x	x	15	20	2280x800x1200	294
59	187650	OLI74 PLUS Electronic S90 Sanitarblock	1180x140x530	15	x	x	15	20	2280x800x1200	292
59	878840	OLI74 PLUS cap Hydroboost S90 Sanitarblock	1180x140x530	15	x	x	15	20	2280x800x1200	292
59	878655	OLI74 PLUS cap AC S90 Sanitarblock	1180x140x530	15	x	x	15	20	2280x800x1200	292

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg	
OLI74 PLUS - Sanitarblock														
59	879085	OLI74 PLUS Mechanic Sanitarblock 2 inlet valves		1175x167x634	16	x		x	16	16		2228x835x1200	252	
59	152978	OLI74 PLUS Mechanic OLIpure Sanitarblock		1175x167x634	16	x		x	16	16		2229x800x1200	252	
59	002333	OLI74 PLUS Pneumatic Sanitarblock		1175x167x634	16	x		x	16	16		2337x800x1200	252	
59	077746	OLI74 PLUS Electronic Sanitarblock		1175x167x634	15	x		x	15	16		2229x835x1200	248	
59	878841	OLI74 PLUS cap Hydroboost Sanitarblock		1175x167x634	15	x		x	15	16		2229x835x1200	248	
59	878626	OLI74 PLUS cap AC Sanitarblock		1175x167x634	15	x		x	15	16		2229x835x1200	248	
OLI74 PLUS - Free-standing														
60	601824	OLI74 PLUS Mechanic Free-standing		1175x167x634	18	x		x	18	16		2337x800x1268	287	
60	879089	OLI74 PLUS Mechanic Free-standing 2 inlet valves		1175x167x634	0	x		x	0	16		2337x800x1268	287	
60	152979	OLI74 PLUS Mechanic OLIpure Free-standing		1175x167x634	18	x		x	18	16		2229x800x1200	291	
60	002488	OLI74 PLUS Pneumatic Free-standing		1175x167x634	18	x		x	18	16		2337x800x1268	290	
60	077752	OLI74 PLUS Electronic Free-standing		1175x167x634	18	x		x	18	16		2337x800x1268	286	
60	878842	OLI74 PLUS cap Hydroboost Free-standing		1175x167x634	18	x		x	18	16		2337x800x1268	286	
60	878627	OLI74 PLUS cap AC Free-standing		1175x167x634	18	x		x	18	16		2337x800x1268	286	
OLI74 PLUS - Free-standing double														
60	600859	OLI74 PLUS Mechanic Free-standing double		1305x306x670	37	x		x	37	7		2383x800x1305	256	
OLI80 - Direct														
64	600051	OLI80 Mechanic		625x117x669	5	x		650x626x675	23	60		2187x1252x1300	160	
OLI80 - Squat pan														
64	045058	OLI80 Mechanic squat pan		625x117x670	5	x		650x626x675	23	60		2187x1252x1300	160	
OLI80 - Simflex														
65	600251	OLI80 Mechanic Simflex		920x170x540	8	x		x	x	x		2187x1252x1300	168	
OLI80 -Sanitarblock														
65	600151	OLI80 Mechanic Sanitarblock		140x530x1180	13	x		x	x	x		2280x840x1200	272	

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

EXPERT PLUS 820 - Direct

68	721003	EXPERT PLUS Mechanic	525x166x590	4	x	x	4	35	2096x800x1200	142
68	152966	EXPERT PLUS Mechanic OLIpure	525x166x590	4	x	x	4	35	2096x800x1200	142
68	721005	EXPERT PLUS Pneumatic	525x166x590	4	x	x	4	35	2096x800x1200	142

EXPERT PLUS 820 - Simflex

68	076456	EXPERT PLUS Mechanic Simflex 820	785x440x170	9	x	x	9	30	2360x800x1200	268
68	152967	EXPERT PLUS Mechanic OLIpure Simflex 820	785x440x170	9	x	x	9	30	2360x800x1200	283
68	141960	EXPERT PLUS Pneumatic Simflex 820	785x440x170	9	x	x	9	30	2360x800x1200	268

EXPERT PLUS 820 - Sanitarblock

69	721703	EXPERT PLUS Mechanic Sanitarblock 820	845x191x525	13	x	x	13	24	2250x800x1200	302
69	152968	EXPERT PLUS Mechanic OLIpure Sanitarblock 820	845x191x525	13	x	x	13	24	2250x800x1200	302
69	141961	EXPERT PLUS Pneumatic Sanitarblock 820	845x191x525	12	x	x	12	24	2260x845x1200	299

EXPERT PLUS 820 - Free-standing

69	014092	EXPERT PLUS Mechanic Free-standing 820	845x191x525	16.32	x	x	16.32	24.00	2260x845x1227	392
69	152969	EXPERT PLUS OLIpure Free-standing 820	845x191x525	17	x	x	17	24	2250x800x1200	396
69	048375	EXPERT PLUS Pneumatic Free-standing 820	845x191x525	16	x	x	16	24	2260x845x1227	390

EXPERT PLUS 820 - Simflex

70	014095	EXPERT PLUS Mechanic Simflex 1130	805x166x580	11	x	x	x	21	1900x830x1200	227
----	--------	--------------------------------------	-------------	----	---	---	---	----	---------------	-----

EXPERT PLUS 820 - Sanitarblock

71	721803	EXPERT PLUS Mechanic Sanitarblock 1130	1160x450x190	14	x	x	x	16	1940x800x1200	253
----	--------	---	--------------	----	---	---	---	----	---------------	-----

EXPERT PLUS 820 - Free-standing

71	014091	EXPERT PLUS Mechanic Free-standing 1130	1160x450x190	16	x	x	x	16	1940x800x1200	251
----	--------	---	--------------	----	---	---	---	----	---------------	-----

Page	Code	Description	 WxDxH	Kg	Qt.	 WxDxH	Kg	Qt.	 HxWxD	Kg	
QUADRA PLUS - Direct											
74	720002	QUADRA PLUS Mechanic	286x205x610	3	x	x	3	64	2460x820x1200	193	
74	037172	QUADRA PLUS Pneumatic	286x205x610	3	x	x	3	64	2408x824x1200	204	
QUADRA PLUS - Sanitarblock											
74	722019	QUADRA PLUS Mechanic Sanitarblock	1179x220x310	13	x	x	13	20	2424x800x1200	254	
74	141945	QUADRA PLUS Pneumatic Sanitarblock	1179x220x310	13	x	x	13	20	2424x800x1200	254	
QUADRA PLUS - Free-standing											
75	722021	QUADRA PLUS Mechanic Free-standing	1179x220x310	14	x	x	14	20	2424x800x1200	272	
75	187103	QUADRA PLUS Pneumatic Free-standing	1179x220x310	14	x	x	14	20	2424x800x1200	272	
FRAMES											
78	714001	WC Sanitarblock	630x450x170	8	x	x	x	36	1250x800x1960	288	
78	616042	WC Free-standing	535x211x540	11	x	x	11	28	2320x800x1200	319	
79	877930	4 WC Fixation Points Sanitarblock - axial connection	535x211x540	17	x	x	17	28	2320x800x1200	478	
79	879027	4 WC Fixation Points Free-standing - axial connection	535x211x540	17	x	x	17	28	2320x800x1200	478	
80	618581	ECO Simflex	210x630x50	2	x	x	x	200	1380x850x1200	481	
80	610010	BIDET Simflex	350x110x440	4	x	x	x	100	1200x820x1200	224	
81	008908	ECO BIDET Sanitarblock	513x126x180	6	x	x	x	120	1780x800x1200	723	
81	136078	BIDET Sanitarblock	1170x550x100	11	x	x	x	24	1810x800x1200	264	
82	611011	WASHBASIN Simflex	100x370x370	3,5	x	x	x	60	1200x800x1200	218	
82	136312	WASHBASIN Sanitarblock	1175x96x550	4	x	x	4	24	1810x800x1200	86	
83	031526	EASY Sanitarblock	1140x340x230	8	x	x	x	16	2320x800x1200	152	
85	136179	URINAL Sanitarblock	1175x96x550	13	x	x	13	24	1810x800x1200	307	
85	879116	ECO URINAL frame		x	x	x	x	x	x	x	x
CONTROL PLATES											
TRIBE											
93	879065	TRIBE White	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x	
93	879063	Tribe Black	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x	
93	879066	TRIBE Red	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x	
93	879068	TRIBE Anthracite	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x	

Page	Code	Description	WxDxH	Kg	Qt.	WxDxH	Kg	Qt.		
									HxDxD	Kg
93	879067	TRIBE Gold plated	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x
93	879071	TRIBE Taupe	252x178x109	x	x	595x391x500	x	320	1810x800x1200	x

MOON

95	878848	MOON White	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878981	MOON Black	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x

GLASSY

95	878849	GLASSY White	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878850	GLASSY Black	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878700	GLASSY Gold plated	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878703	GLASSY Red	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878702	GLASSY Anthracite	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x
95	878701	GLASSY Taupe	252x178x109	x	x	595x391x500	x	320	2660x800x1200	x

TRUMPET

97	046199	TRUMPET Polished chrome	261x187x114	1	x	595x391x500	11	320	2660x800x1200	222
97	046198	TRUMPET Brushed	261x187x114	1	x	595x391x500	11	320	2660x800x1200	222
97	878783	Trumpet Gold plated	261x187x114	x	x	595x391x500	x	320	2660x800x1200	x
97	878784	Trumpet Bronze	261x187x114	x	x	595x391x500	x	320	2660x800x1200	x

SM15

98	022238	SM15 White tempered glass	470x170x77	1	0	485x351x345	10	192	1540x1000x1200	240
----	--------	---------------------------	------------	---	---	-------------	----	-----	----------------	-----

INO-X

99	660001	INO - X 01 Polished chrome	x	1	x	x	x	x	x	x
99	661001	INO - X 01 Brushed	x	1	x	x	x	x	x	x
99	660002	INO - X 02 Polished chrome	x	1	x	x	x	x	x	x
99	661002	INO - X 02 Brushed	x	1	x	x	x	x	x	x
99	660003	INO - X 03 Polished chrome	x	1	x	x	x	x	x	x
99	661003	INO - X 03 Brushed	x	1	x	x	x	x	x	x
99	660006	INO - X 06 Polished chrome	x	2	x	x	x	x	x	x
99	661006	INO - X 06 Brushed	x	2	x	x	x	x	x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
OCEANIA													
101	054564	OCEANIA mech stainless steel - Brushed		252x178x109	1	x		595x391x500	17	320		2660x800x1200	343
101	054561	OCEANIA mech stainless steel - Polished chrome		252x178x109	1	x		595x391x500	17	320		2660x800x1200	343
101	054554	OCEANIA mech glass White		252x178x109	1	x		595x391x500	15	320		2660x800x1200	305
101	054557	OCEANIA mech glass Black		252x178x109	1	x		595x391x500	15	320		2660x800x1200	304
101	054562	OCEANIA mech stainless steel button - glass Black		252x178x109	1	x		595x391x500	16	320		2660x800x1200	312
101	054558	OCEANIA mech stainless steel button - glass White		252x178x109	1	x		595x391x500	16	320		2660x800x1200	313
101	054563	OCEANIA MIA mech (customizable)		252x178x109	1	x		595x391x500	14	320		2660x800x1200	278
101	054988	OCEANIA pneu stainless steel - Brushed		252x178x109	1	x		595x391x500	18	320		2660x800x1200	355
101	054998	OCEANIA pneu Stainless steel - Polished chrome		252x178x109	1	x		595x391x500	18	320		2660x800x1200	355
101	054989	OCEANIA pneu glass White		252x178x109	1	x		595x391x500	16	320		2660x800x1200	317
101	054992	OCEANIA pneu glass Black		252x178x109	1	x		595x391x500	16	320		2660x800x1200	316
101	054996	OCEANIA pneu stainless steel - glass Black		252x178x109	1	x		595x391x500	16	320		2660x800x1200	324
101	054993	OCEANIA pneu stainless steel - glass White		252x178x109	1	x		595x391x500	16	320		2660x800x1200	325
101	054997	OCEANIA MIA pneu (customizable)		252x178x109	1	x		595x391x500	14	320		2660x800x1200	290
GLOBE													
102	152949	GLOBE White		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	152950	GLOBE Polished chrome		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	152951	GLOBE Matt chrome		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	152952	GLOBE Black soft-touch		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	152953	GLOBE Grey soft-touch		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	152954	GLOBE Gold plated		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
102	878910	GLOBE Bronze		266x190x55	x	x		595x391x500	14	680		2660x800x1200	272
SLIM													
102	659041	SLIM White		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	659044	SLIM Polished chrome		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	659046	SLIM Matt chrome		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	659055	SLIM Black soft-touch		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	010216	SLIM Grey soft-touch		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	154962	SLIM Gold plated		266x190x55	x	34		595x391x500	16	680		2660x800x1200	272
102	057141	SLIM Inox		266x190x55	x	34		595x391x250	10	640		2660x800x1200	384

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

GLAM

103	139178	GLAM White OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	391
103	139179	GLAM Polished chrome OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	391
103	139180	GLAM Matt chrome OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	392
103	139181	GLAM Black soft-touch OLIpure	260x180x97	1	x	595x391x500	18	680	2660x800x1200	603
103	139184	GLAM White	266x190x55	x	x	595x391x500	14	680	2660x800x1200	277
103	139185	GLAM Polished chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	277
103	139186	GLAM Matt chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	279
103	139187	GLAM Black soft-touch	266x190x55	x	x	595x391x500	11	680	2660x800x1200	215

NARROW

103	148300	NARROW White OLIpure	260x180x97	1	x	595x391x500	19	400	2660x800x1200	390
103	148301	NARROW Polished chrome OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	391
103	148302	NARROW Matt chrome OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	391
103	148303	NARROW Black soft-touch OLIpure	260x180x97	1	x	595x391x500	20	400	2660x800x1200	391
103	152939	NARROW White	266x190x55	x	x	595x391x500	14	680	2660x800x1200	275
103	152940	NARROW Polished chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	277
103	152941	NARROW Matt chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	277
103	152942	NARROW Black Soft-Touch	266x190x55	x	x	595x391x500	14	680	2660x800x1200	277

PLAIN

104	070826	PLAIN White	266x190x55	x	x	595x391x500	14	680	2660x800x1200	272
104	070827	PLAIN Polished chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	272
104	070828	PLAIN Matt chrome	266x190x55	x	x	595x391x500	14	680	2660x800x1200	272
104	070829	PLAIN Black soft-touch	266x190x55	x	x	595x391x500	14	680	2660x800x1200	272

iPLATE

104	670001	iPLATE White	266x190x55	x	x	595x391x500	10	680	2660x800x1200	204
104	670004	iPLATE Polished chrome	266x190x55	x	x	595x391x500	10	680	2660x800x1200	204
104	670005	iPLATE Black soft-touch	266x190x55	x	x	595x391x500	10	680	2660x800x1200	204
104	670006	iPLATE Matt chrome	266x190x55	x	x	595x391x500	10	680	2660x800x1200	204
104	670008	iPLATE White soft-touch	266x190x55	x	x	595x391x500	10	680	2660x800x1200	204
104	670051	Kit fantasy iPLATE		x	x	595x391x500	10	1000	2660x800x1200	400
104	670052	Kit elegance iPLATE		x	x	595x391x500	10	1000	2660x800x1200	400

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg
------	------	-------------	---	-------	----	-----	---	-------	----	-----	---	-------	----

RIA

105	640581	RIA White	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	640584	RIA Polished chrome	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	640586	RIA Matt chrome	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	640591	RIA White bacterial proof	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	010244	RIA stop Polished chrome	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	010234	RIA stop White	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340

RIVER

105	638501	RIVER White	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	638504	RIVER Polished chrome	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	638506	RIVER Matt chrome	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340
105	638508	RIVER Gold plated	266x190x55	x	x	595x391x500	17	680	2660x800x1200	340

SALINA

105	640081	SALINA White	252x178x109	x	x	595x391x500	10	320	2660x800x1200	160
105	640084	SALINA Polished chrome	252x178x109	x	x	595x391x500	10	320	2660x800x1200	160
105	640086	SALINA Matt chrome	252x178x109	x	x	595x391x500	10	320	2660x800x1200	160
105	640097	SALINA Black soft-touch - Polished chrome button	252x178x109	x	x	595x391x500	10	320	2660x800x1200	160

BLINK

106	154963	BLINK Polished chrome	240x162x90	x	x	595x391x500	24	560	2660x800x1200	485
106	093399	BLINK Brushed	240x162x90	x	x	595x391x500	24	560	2660x800x1200	485
106	216621	BLINK White	240x162x90	x	x	595x391x500	24	560	2660x800x1200	485
106	878489	BLINK Black	240x162x90	x	x	595x391x500	24	560	2650x800x1200	485
106	878781	BLINK Gold plated	240x162x90	x	x	595x391x500	24	560	2650x800x1200	485
106	878782	BLINK Bronze	240x162x90	x	x	595x391x500	24	560	2650x800x1200	485

TREND

106	656504	TREND Polished chrome	252x178x109	x	x	595x391x500	14	400	2660x800x1200	280
106	656506	TREND Matt chrome	252x178x109	x	x	595x391x500	14	400	2660x800x1200	280

EASY DUAL

107	011642	EASY DUAL Chrome	140x140x152	x	x	485x351x635	16	432	2065x1000x1200	289
107	011640	EASY DUAL white	140x140x152	x	x	485x351x635	16	432	2065x1000x1200	287

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

KARISMA

107	641001	KARISMA White	252x178x109	x	20	595x391x500	50	400	2660x800x1200	200
107	641004	KARISMA Polished chrome	252x178x109	x	20	595x391x500	50	400	2660x800x1200	200
107	641006	KARISMA Matt chrome	252x178x109	x	20	595x391x500	50	400	2660x800x1200	200
107	641015	KARISMA Black soft-touch	252x178x109	x	20	595x391x500	50	400	2660x800x1200	200

METAL

109	656004	METAL Polished chrome	266x190x55	x	16	595x391x500	x	640	2660x800x1200	768
109	656006	METAL Matt chrome	266x190x55	x	16	595x391x500	x	640	2660x800x1200	768

ELECTRA

111	079206	ELECTRA III Polished chrome zamac	266x190x55	x	16	595x391x500	8	640	2660x800x1200	320
111	079205	ELECTRA II Polished chrome zamac	266x190x55	x	16	595x391x500	8	640	2660x800x1200	320
111	079207	ELECTRA I Polished chrome zamac	266x190x55	x	16	595x391x500	8	640	2660x800x1200	320

eAQUA URINAL

112	879120	eAQUA URINAL Inox AC	x	x	x	x	x	x	x	x
112	879119	eAQUA URINAL Inox BATT	x	x	x	x	x	x	x	x
112	879123	Urinal concealed pre installation	x	x	x	x	x	x	x	x

TREND URINAL

112	031752	TREND URINAL Polished chrome zamac	215x215x135	2	x	595x391x250	12	96	1150x800x1200	196
-----	--------	------------------------------------	-------------	---	---	-------------	----	----	---------------	-----

SM15 URINAL

113	034265	SM15 URINAL White tempered glass	215x215x135	2	x	595x391x250	12	96	1150x800x1200	184
-----	--------	----------------------------------	-------------	---	---	-------------	----	----	---------------	-----

GLOBE

113	878466	GLOBE URINAL White	x	x	x	x	x	x	x	x
113	878818	GLOBE URINAL Polished chrome	x	x	x	x	x	x	x	x
113	878819	GLOBE URINAL Matt chrome	x	x	x	x	x	x	x	x
113	878820	GLOBE URINAL Black soft-touch	x	x	x	x	x	x	x	x
113	878821	GLOBE URINAL Grey soft-touch	x	x	x	x	x	x	x	x
113	878822	GLOBE URINAL Gold plated	x	x	x	x	x	x	x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxW	Kg
113	878823	GLOBE URINAL Bronze		x	x	x		x	x	x	x	x	x
113	879017	Urinal concealed pre installation		x	x	x		x	x	x	x	x	x

ACESSÓRIOS

114	878292	AC conversion kit OLI 74 PLUS		x	x	x		x	x	x	x	x	x
114	878293	AC conversion kit OLI 120 PLUS		x	x	x		x	x	x	x	x	x
114	154084	Pneumatic conversion Kit OLI120 PLUS	260x180x97	x	20		595x391x500	x	400	2660x800x1200	160		
114	878294	Hydroboost conversion Kit OLI120 PLUS	260x180x97	x	18		595x391x500	x	360	2660x800x1200	252		
114	154085	Electronic conversion Kit OLI120 PLUS	260x180x97	x	18		595x391x500	x	400	2660x800x1200	144		
114	601527	Pneumatic conversion kit OLI74 PLUS	266x190x55	x	x		595x391x500	x	680	2660x1000x2660	136		
115	077754	Electronic conversion kit OLI74 PLUS	105x105x389	x	x		595x391x500	x	300	2660x1000x2660	179		
115	878285	Hydroboost conversion kit OLI74 PLUS	260x180x97	x	x		595x391x500	x	360	2660x1000x2660	240		
115	556807	Pneumatic conversion kit EXPERT PLUS	266x190x55	x	34		595x391x250	6,8	680	2660x800x1200	136		
115	601038	Mechanic conversion kit EXPERT PLUS	266x190x55	x	x		595x391x250	x	108	2660x800x1200	21,6		
115	211743	Mechanic conversion kit EXPERT PLUS - top actuation	266x190x55	x	x		595x391x250	x	680	2660x800x1200	136		
115	216640	Fixation Kit for OLI74 Plus											
116	191887	Shower toilet connections kit		x	x	x		x	x	x	x	x	x
116	878808	Shower toilet connections kit (shower included)		x	x	x		x	x	x	x	x	x
116	101773	Pneumatic conversion kit QUADRA	266x190x55	x	34		595x391x250	13,6	680	2660x800x1200	108		
116	152974	OLIpure kit	180x260x100	x	20		595x391x250	12	360	2150x800x1200	216		
116	101772	HAPPY AIR FAN for OLI74 Plus Happy air		x	x	x		x	x	x	x	x	x
117	207892	Inpection plate Chrome	270x190x60	1	16		600x390x250	16	640	2660x800x1200	640		
117	207893	Inpection plate Brushed		x	x	x		x	x	x	x	x	x
117	216252	Kit duplex		x	x	x		595x391x500	11	x	x	x	x
117	079260	230/12V switch mode power supply		x	x	x	--		x	x	x	x	x
117	620001	Floor support system with lateral fixation for Simflex frames		x	2	x		x	x	x	x	x	x
117	086360	PP Adaptor Ø90/110		x	x	x		595x391x500	8	1000	2660x800x1200	150	
118	605294	MINI TREND	260x260x120	0,9	20		600x410x280	7	320	900x800x1200	92		
118	605254	MONO TREND	270x180x100	0,5	20		600x400x330	7	320	1110x800x1200	92		
118	605264	Pneumatic actuator SPHERA +	130x110x120	0,1	100		600x400x330	4,3	2000	1110x800x1200	59		
118	605274	Pneumatic actuator SPHERA -	130x110x120	0,1	100		600x400x330	4,3	2000	1110x800x1200	59		

Page	Code	Description	WxDxH	Kg	Qt.	WxDxH	Kg	Qt.	HxDxD	Kg
118	718063	In-wall Pneumatic actuator hand operated White	x	x	x	x	x	x	x	x
119	605201	Pneumatic actuator foot operated floor mounted	x	x	15	600x390x440	x	300	2330x800x1200	x
119	605301	Pneumatic actuator foot operated wall mounted	x	x	x	-	x	x	x	x
119	605001	In-wall Pneumatic actuator hand operated White	260x190x100	0,5	20	600x390x500	10	400	2000x1000x1200	200
119	605004	In-wall Pneumatic actuator hand operated Polished chrome	260x190x100	0,5	20	600x390x500	10	400	2000x1000x1201	200
119	605101	Pneumatic actuator hand operated White	130x130x460	0,6	12	600x390x500	7,2	240	2000x1000x1202	144
119	605104	Pneumatic Actuators hand operated Polished chrome	130x130x460		12	600x390x500	7,2	240	2000x1000x1203	144
120	622022	Double HPDE WC outlet bend D1 - Ø90, D2 - Ø110	x	1	x	x	x	x	x	x
120	036888	PP WC outlet bend L - 340, D1 - Ø90, D2 - Ø90	x	0,6	150	500x400x140	90	x	x	x
120	622002	HPDE WC outlet bend L - 300, D1 - Ø90, D2 - Ø110	x	0,6	20	600x400x250	8	640	2150x800x1200	384
120	622003	HPDE WC outlet bend L - 300, D1 - Ø110, D2 - Ø110	x	x	x	x	x	x	-	-
120	622004	HPDE WC outlet bend L - 230, D1 - Ø90, D2 - Ø100	x	0,4	20	600x400x250	8	640	2150x800x1200	256
120	622005	HPDE WC outlet bend L - 230, D1 - Ø110, D2 - Ø100	x	x	-	-	x	x	-	x
120	622017	Double HPDE WC outlet bend	x	0,9	5	600x390x500	4,5	100	2660x800x1200	90
120	079929	Flexible outlet WC bend	x	0,4	24	600x390x500	8	400	2660x800x1200	160
120	622401	Flexible flush pipe extension	x	0,2	40	600x390x440	8	800	2330x800x1200	160
121	108380	Horizontal outlet WC	x	x	x	x	x	x	x	x
121	719183	Sanitarblock corner kit	x	x	x	x	x	x	x	x
121	043234	3m Pneumatic pipe (x2) - A	x	x	x	x	x	x	x	x
121	049544	1,8m protection pipe - B	x	x	x	x	x	x	x	x
121	014874	Flow rate reducer for OLI In-wall cisterns	x	x	x	x	x	x	x	x
121	622301	Protective caps White	x	0,06	150	500x400x140	9	x	x	x
121	622303	Protective caps Polished chrome	x	x	x	x	x	x	x	x
121	602501	Telescopic connecting pipe Ø45/40 x 130 White	x	0,2	50	600x390x500	10	1000	2160x800x1200	200
122	879143	Lift-up support rail + Toilet roll holder	x	x	x	x	x	x	x	x
122	622501	Sleeves for wall-hung pan L1 - 250 L2 - 180, D1 - Ø90	x	0,8	25	600x390x500	20	200	1000x800x1200	160
122	622503	Sleeves for wall-hung pan L1 - 250, L2 - 180, D1 - Ø110	x	0,8	100	600x390x500	80	2000	2660x800x1200	160
122	622523	Sleeves for wall-hung pan L1 - 300, L2 - 300, D1 - Ø110	x	0,8	20	600x390x500	16	400	2660x800x1200	320
122	011229	Longer sleeves for wall-hung WC pan	x	1	20	600x390x500	20	320	2160x800x1200	320
123	108185	S-bend outlet	x	-	-	-	-	-	-	-

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg	
123	602101	Connecting pipe L - 280, D1 - Ø130, D2 - Ø40, D3 - Ø40 White	x	0,2	50	600x390x500	10	1000	2660x1000x1200	200				
123	602001	Connecting pipe L - 280, D1 - Ø90, D2 - Ø30, D3 - Ø32 White	x	x	x		x	x	x	x	x	x	x	x
123	602201	Connecting pipe L - 280, D1 - Ø90, D2 - Ø45, D3 - Ø45 White	x	0,2	50	440x350x600	10	900	2050x970x1200	180				
123	602301	Connecting pipe L - 500, D1 - Ø90, D2 - Ø40, D3 - Ø40 White	x	x	x		x	x	x	x	x	x	x	x
123	620071	Acoustic insulation for wall-hung pan and bidet	x	x	x		x	x	x	x	x	x	x	x
123	620072	Acoustic insulation for wall-hung washbasin	x	x	x		x	x	x	x	x	x	x	x

EXPOSED FLUSH CISTERNS

QUARZO

126	124427	QUARZO	456x146x450	3	5	764x474x460	15	75	2450x1000x1238	227
126	154961	QUARZO OLIpure	456x146x450	2	5	764x474x460	12	75	2400x1000x1220	181

TOPAZIO DD

127	416201	TOPAZIO DD with 1/2" stop valve	446x144x446	4	5	757x470x478	19	75	2550x1000x1227	290
127	416501	TOPAZIO DD	446x144x446	4	5	757x470x478	18	75	2550x1000x1227	268

ONIX PLUS

127	340221	ONIX PLUS 2 in 1	356x146x456	3	5	767x380x491	16	75	2440x800x1200	234
-----	--------	------------------	-------------	---	---	-------------	----	----	---------------	-----

ZAFFIRO DD

128	425201	ZAFFIRO DD with 1/2" stop valve	408x176x431	4	5	916x430x459	18	75	2515x926x1376	267
128	425501	ZAFFIRO DD	408x176x431	4	5	916x430x459	18	75	2515x926x1376	267
128	002426	ZAFFIRO DD bottom connection	408x176x431	3	5	916x430x459	17	75	2455x860x1346	253

TURCHESE

128	440201	TURCHESE with 1/2" stop valve	456x146x430	3	5	777x475x456	16	75	2440x950x1252	246
128	440051	TURCHESE	456x146x430	3	5	777x475x456	16	75	2440x950x1252	235
128	440881	TURCHESE Pneumatic version	456x146x430	3	5	777x475x456	16	75	2440x950x1252	238

SMERALDO HIGH POSITION

129	027870	SMERALDO high position	456x146x430	3	5	777x475x456	15	80	2310x1000x1200	256
-----	--------	------------------------	-------------	---	---	-------------	----	----	----------------	-----

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	--	-------	----	-----	--	-------	----	-----	--	-------	----

OLISTYLE

129	440141	OLISTYLE		456x146x430	3	5		777x475x456	15	80		2310x1000x1200	256
-----	--------	----------	--	-------------	---	---	--	-------------	----	----	--	----------------	-----

TOPAZIO PNEU HIGH

129	413781	TOPAZIO Pneu high with 1/2" stop valve		446x144x446	4	5		757x470x478	18	100		2550x1227x1227	352
-----	--------	--	--	-------------	---	---	--	-------------	----	-----	--	----------------	-----

ACCESSORIES

132	490601	A - Flush pipe for medium/high cisterns - White	x	x	x		1120x327x284	3	600		2432x1000x1200	81	
132	490501	B - Flush pipe for medium/high cisterns - White	x	x	x		600x401x315	8	560		2365x802x1200	227	
132	490701	Modular flush pipe for high cisterns - White	x	1	x		1120x327x284	9	360		2432x1000x2432	218	
132	490301	Flush pipe H - 600, D - Ø32 - White	x	x	x		762x333x290	3	525		2190x800x1200	64	
132	490318	Flush pipe H - 600, D - Ø40 - White	x	x	x		x	x	x		x	x	
132	490401	Flush pipe H - 1000, D - Ø32 - White	x	x	x		1120x327x284	3	600		2432x1000x1200	81	
132	490001	Flush pipe L - 210, D - Ø32 - White	x	x	x		x	x	x		x	x	
132	490101	Flush pipe L - 210, D - Ø40 - White	x	x	x		x	x	x		x	x	
132	490130	Flush pipe L - 350, D - Ø40 - White	x	x	x		600x401x315	2	700		2365x1000x1200	71	
133	490881	Modular flush pipes for high/medium/low level cisterns - White	x	1	x		595x391x500	16	600		2365x1000x1200	321	
133	490751	Flush bend - White	x	x	x		600x401x315	5	875		2365x1000x1200	192	
133	087617	TOPAZIO Pneumatic kit		260x180x97	x	x		595x391x500	6	400		2660x800x1200	141

UNIVERSAL MECHANISMS

136	878736	IVC 102 PLUS 1/2 brass - box	x	x	x		x	x	x		x	x
136	878735	IVC 102 PLUS 15/16 plastic - box	x	x	x		x	x	x		x	x
136	879284	IVC 102 PLUS 1/2 plastic - box	x	x	x		x	x	x		x	x
136	878738	IVC 102 PLUS 1/2 brass - bag	x	x	x		x	x	x		x	x
136	878737	IVC 102 PLUS 15/16 plastic - bag	x	x	x		x	x	x		x	x
136	879285	IVC 102 PLUS 1/2 plastic- bag	x	x	x		x	x	x		x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	---	-------	----	-----	---	-------	----	-----	---	-------	----

AZOR PLUS

137	564100	AZOR PLUS side 3/8" brass - box	140x80x280	0,36	30	600x390x500	10,8	600	2660x800x1200	216
137	564102	AZOR PLUS bottom 3/8" brass - box	150x80x330	0,5	20	600x400x440	10	400	2430x800x1200	200

IVC100

137	099936	IVC100 3/8" brass - box	151x71x261	x	x	595x391x500	13	600	2660x800x1200	251
137	099935	IVC100 3/8" brass - bag		x	x	595x391x500	17	1000	2660x800x1200	332

AZOR SILENT

138	002437	AZOR SILENT side/bottom 3/8" brass - blister		x	1	x	595x391x535	12	360	2300x1000x1200	236
-----	--------	--	--	---	---	---	-------------	----	-----	----------------	-----

COMPACT

138	561460	COMPACT 3/8" brass - box	151x71x261	x	x	595x391x500	10	600	2650x800x1200	207
138	561598	COMPACT 3/8" brass - bag	--	x	x	595x391x500	15	1200	2160x1000x1200	306

JOLLY UNI

139	560160	JOLLY UNI 3/8" brass - box	151x71x261	x	x	595x391x500	9	500	2160x1000x1200	148
139	560170	JOLLY UNI 1/2" brass - box	151x71x261	x	x	595x391x500	10	500	2160x1000x1200	164
139	044993	JOLLY UNI 3/8" brass - bag		x	x	595x391x500	6	1000	2160x1000x1200	235
139	044992	JOLLY UNI 1/2" brass - bag		x	x	595x391x500	6	1000	2160x1000x1200	255

UNI BOTTOM

139	562160	UNI BOTTOM 3/8" brass - box		x	x	x	x	x	x	x	
139	562176	UNI BOTTOM 3/8" plastic - box	101x86x401	x	x	595x391x500	6	400	2660x800x1200	192	
139	562162	UNI BOTTOM 1/2" brass - box		x	x	x	x	x	400	2660x800x1200	192
139	562163	UNI BOTTOM 1/2" plastic - box		x	x	x	x	x	400	2660x800x1200	128
139	092329	UNI BOTTOM refill 1/2" plastic - box	101x86x401	x	x	595x391x500	6	400	2660x800x1200	128	
139	563571	UNI BOTTOM 3/8" brass - bag		x	x	x	595x391x500	11	400	2160x1000x1200	213
139	022371	UNI BOTTOM 3/8" plastic - bag		x	x	x	595x391x500	10	400	2660x800x1200	190
139	044995	UNI BOTTOM 1/2" brass - bag	--	x	x	595x391x500	10	400	2160x1000x1200	192	
139	563594	UNI BOTTOM 1/2" plastic - bag	101x86x401	x	x	595x391x500	6	400	2660x1000x1200	190	

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxW	Kg
ATLAS CABLE													
140	501120	ATLAS CABLE - box		x		x		x		x		x	
140	022369	ATLAS CABLE - bag		x		x		x	595x391x500	14	480	2160x800x1200	225
ATLAS													
141	501121	ATLAS - box		x		x		x		x		x	
141	011967	ATLAS - bag		119x105x355	1	x		595x391x500	14	500	2660x1000x1200	339	
FAST START/STOP													
141	100019	FAST START/STOP - box		119x105x355	1	x		595x391x500	12	400	2660x800x1200	234	
141	088755	FAST START/STOP - bag		x	1	x		595x391x500	11	400	2160x1000x1200	229	
PUSH ECO													
142	501020	PUSH ECO - box		119x105x311	1	x		595x391x500	10	500	2660x1000x1200	259	
142	501021	PUSH ECO - bag		119x105x311	1	x		595x391x500	10	300	2100x1000x1261	156	
ECO TIRETTE													
142	507572	ECO TIRETTE - box		x		x		x		x		x	
142	500321	ECO TIRETTE - bag		119x105x311	1	x		595x391x500	11	500	2660x1000x1200	271	
HANDLE													
143	501420	HANDLE - box		119x105x311	x	x		595x391x500	10	500	2660x1000x1200	245	
PUSH ECO + ECO													
143	501023	PUSH ECO + ECO - bag		x	1	x		595x391x500	13	500	2160x1000x1200	267	
PUSH ECO + UNI BOTTOM													
144	501034	PUSH ECO + UNI BOTTOM - bag		x	1	x		595x391x500	13	500	2160x1000x1200	262	
FAST START/STOP + COMPACT													
144	100023	FAST START/STOP + COMPACT - box		x	1	x		595x391x500	17	500	2660x1000x1200	428	
144	100022	FAST START/STOP + COMPACT - bag		x	1	x		595x391x500	14	500	2660x1000x1200	349	

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
------	------	-------------	---	-------	----	-----	---	-------	----	-----	---	-------	----

FAST START/STOP + UNI BOTTOM

144	100032	FAST START/STOP + UNI BOTTOM - box	152x122x397	1	x	595x391x500	10	300	2660x1000x1200	241	
144	100031	FAST START/STOP + UNI BOTTOM - bag		x	1	x	595x391x500	13	500	2660x1000x1200	319

IVC 100 + ATLAS CABLE

145	099938	IVC 100 + ATLAS CABLE - bag	x	1	x	595x391x500	16	240	2660x800x1200	191
145	099939	IVC 100 + ATLAS CABLE - box	161x121x372	1	x	595x391x500	12	240	2660x800x1200	238

OLIPURE KIT

145	101768	OLIPure kit - box	160x120x260	1,2	12	400x390x500	14,4	240	2400x800x1220	288
-----	--------	-------------------	-------------	-----	----	-------------	------	-----	---------------	-----

ACCESSORIES

145	493064	Side cover White	x	x	x	x	x	x	x	x
145	493065	Side cover Polished Chrome	x	x	x	x	x	x	x	x
145	058025	Bottom cover	x	x	x	600x400x435	4	x	x	x

OLIFILo

OLIFILo premium

151	300301	OLIFILo premium 80	x	x	x	x	x	x	x	x
151	300303	OLIFILo premium 90	x	x	x	x	x	x	x	x
151	300300	Support legs	x	x	x	x	x	x	x	x
			x	x	x	x	x	x	x	x

OLIFILo standard

151	300310	OLIFILo standard 70	x	x	x	x	x	x	x	x
151	300312	OLIFILo standard 80	x	x	x	x	x	x	x	x
151	300314	OLIFILo standard 90	x	x	x	x	x	x	x	x
151	300316	OLIFILo standard 110	x	x	x	x	x	x	x	x
151	300300	Support legs	x	x	x	x	x	x	x	x

OLIFILo ceramic

152	300330	OLIFILo ceramic 80	x	x	x	x	x	x	x	x
152	300300	Support legs	x	x	x	x	x	x	x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxWxD	Kg
OLIFILo basic													
152	300341	OLIFILo basic 40		x	x	x		x	x	x	x	x	x
152	300343	OLIFILo basic 50		x	x	x		x	x	x	x	x	x
152	300340	OLIFILo basic 60		x	x	x		x	x	x	x	x	x
152	300347	OLIFILo basic 70		x	x	x		x	x	x	x	x	x
152	300342	OLIFILo basic 80		x	x	x		x	x	x	x	x	x
152	300345	OLIFILo basic 90		x	x	x		x	x	x	x	x	x
152	300346	OLIFILo basic 100		x	x	x		x	x	x	x	x	x
OLIFILo wall													
153	300350	OLIFILo wall 30		x	x	x		x	x	x	x	x	x
153	300300	Support legs		x	x	x		x	x	x	x	x	x
OLIFILo square													
153	300360	OLIFILo square 20		x	x	x		x	x	x	x	x	x
OLIFILo centro													
154	300001	OLIFILo centro 800X800		x	x	x		x	x	x	x	x	x
154	300003	OLIFILo centro 900X900		x	x	x		x	x	x	x	x	x
154	300005	OLIFILo centro 1000X1000		x	x	x		x	x	x	x	x	x
154	300007	OLIFILo centro 1200X1200		x	x	x		x	x	x	x	x	x
154	300009	OLIFILo centro 12000X900		x	x	x		x	x	x	x	x	x
154	300011	OLIFILo centro 1400X900		x	x	x		x	x	x	x	x	x
154	300051	OLIFILo centro ribassato 1200X1200		x	x	x		x	x	x	x	x	x
OLIFILo lato													
155	300081	OLIFILo lato 900x1200		x	x	x		x	x	x	x	x	x
155	300083	OLIFILo lato 1000x1200		x	x	x		x	x	x	x	x	x
				x	x	x		x	x	x	x	x	x
OLIFILo bilato													
155	300101	OLIFILo bilato 1200x1200		x	x	x		x	x	x	x	x	x
GRATE													
156	301204	TONDO grate 128X128 inox chrome		x	x	x		x	x	x	x	x	x

Page	Code	Description		WxDxH	Kg	Qt.		WxDxH	Kg	Qt.		HxDxD	Kg
156	301206	TONDO grate 128X128 inox matt		x	x	x		x	x	x		x	x
156	301254	QUADRO grate 128X128 inox chrome		x	x	x		x	x	x		x	x
156	301256	QUADRO grate 128X128 inox matt		x	x	x		x	x	x		x	x
156	301294	RIGO grate 128X128 inox chrome		x	x	x		x	x	x		x	x
156	301296	RIGO grate 128X128 inox matt		x	x	x		x	x	x		x	x
156	301304	Personalized grate 128X128 inox chrome		x	x	x		x	x	x		x	x
156	301306	Personalized grate 128X128 inox matt		x	x	x		x	x	x		x	x
157	301054	OLI TONDO grate 770X75 inox chrome		x	x	x		x	x	x		x	x
157	301056	OLI TONDO grate 770X75 inox matt		x	x	x		x	x	x		x	x
157	301154	OLI QUADRO grate 770X75 inox chrome		x	x	x		x	x	x		x	x
157	301156	OLI QUADRO grate 770X75 inox matt		x	x	x		x	x	x		x	x
157	301254	Personalized grate 770X75 inox chrome		x	x	x		x	x	x		x	x
157	301156	Personalized grate 770X75 inox matt		x	x	x		x	x	x		x	x

ACCESSORIES

159	300401	Horizontal siphon		x	x	x		x	x	x		x	x
159	300403	Vertical siphon		x	x	x		x	x	x		x	x
159	900159	Siphon D40/50 - 70		x	x	x		x	x	x		x	x
159	300452	Installation kit		x	x	x		x	x	x		x	x
159	300461	EPS elements kit. 900X900		x	x	x		x	x	x		x	x
159	300463	EPS elements kit. 1200X1200		x	x	x		x	x	x		x	x
159	300465	EPS elements kit. 1400X1400		x	x	x		x	x	x		x	x

WARRANTY TERMS

1. WARRANTY PERIODS for OLI products:

- a.In-wall flushing cisterns, bidet, washbasin and urinal structures - 10 (ten) years;
- b.Exposed flushing cisterns- 5 (five) years;
- c.Flushing mechanisms (taps and valves) – 10 (ten) years;
- d.Electronic components, fixtures, and fast-wearing parts, specifically rubber seals or similar products, push-buttons and control plates – 2 (two) years;
- e.All other products – 2 (two) years;

2.The warranty period starts on the purchase date by the first final Consumer. The sales document, corroborating the sales date of the OLI product and the respective serial number, certifies the start date of the warranty. In the event of a subsequent purchase, or any alteration in proprietorship or user, the warranty period shall continue for the remainder the warranty period and shall continue unaltered relative to all other aspects of the warranty.

3.This warranty is also applicable to subsequent substitution parts for those determined to be defective until the end of the warranty period for the product of which they are a part, or up to two years after their application if the remaining warranty period for the product is less than two years. The repair or substitution of a product or a part does not renew the initial warranty period.

4.This warranty is only valid if the product has been correctly installed, in accordance with the installation instructions and the information contained in the catalogues and manuals provided by OLI. In situations where information is not covered in the aforementioned resources, installation should be carried out in accordance with the standards, rules and technical specifications contained in the legislation in effect, applicable to the type of devices and mechanisms in question.

5.The applicability of this warranty also depends on the use considered to be normal for the products, the operating conditions (ex. pressure, temperature, etc.) and the type of liquid used, which should have values within the parameters indicated in the catalogues or manuals provided by OLI.

6.The flush pipes are used for other liquids other than network water. Therefore, the standards relative to the resistance of polyethylene (PE), polypropylene (PP) and polyvinyl chloride (PVC) should always be respected.

7.Products with missing parts or which are defective at the time of installation, as well as during pressure tests, should not be used.

8.OLI products should not be used with other products which do not have local national Quality Approvals/Certificates.

9.Any product return should be accompanied by a copy of the sales receipt, with the product in its original packaging, whenever possible.

10.This warranty is immediately terminated and is not extended to any equipment or part that has been damaged or become inoperative as a result of the following:

- a) Accident, fall, fire, flooding and inappropriate, abusive or negligent use;
- b) Use of parts or accessories which have not been manufactured or provided by OLI, or whose provision and/or manufacture have not been expressly authorised by OLI;
- c) Unauthorised alterations to the equipment;
- d) Breaking of any warranty seal or removal of any label with the serial number or legally mandatory marking;
- e) Assistance, repairs or substitutions carried out by third parties other than OLI, an authorised reseller or certified technical centre.

11.Under no circumstances does the warranty cover the product's installation.

12.The products are packaged in duly identified packages which fulfil the requirements established in applicable national legislation. OLI cannot be held responsible for material or personal damage resulting from the incorrect or inappropriate use of the packages.

13.Failure to comply with any of the aforementioned clauses releases OLI from responsibilities pertaining to material damage and/or non-material damage which may result.

14.OLI recommends that the packaging materials of its products, after no longer being needed, should be recycled by the appropriate and socially responsible means and processes.

15.In the case of defects or non-conformity of OLI products, a written notification should be sent to the sales representative or OLI client manager within 60 days of becoming aware of the defect, as long as it was not previously visible, within reason. The appropriate measure shall then be taken to determine the possible defects detected. The notification may also occur by telephone, followed by a registered letter with acknowledgment of receipt within 24 hours to Customer Service, OLI – Sistemas Sanitários, S.A., Travessa do Milão, Esgueira, 3800-314 Aveiro (Portugal)



16.Failure to comply with the terms of the aforementioned number may result in the total or partial loss of the right to compensation or of the warranty itself.

17.The notification mentioned in Point 15 of this Warranty, issued by means of registered letter to OLI's Customer Service should contain the following information:

- a) Name, address and telephone number of the claimant;
- b) Identification of the product;
- c) Entity and place where the product was acquired (when not at OLI), as well as the respective purchase date;
- d) Address of the location where the product was installed;
- e) Description of the visible losses;
- f) Type of installation and the materials used (if the claimant has this information);
- g) Conditions of use, ex. type of system, pressure, temperature, etc. (if the claimant has this information);
- h) Name, address and telephone number of the company or person who installed the product.

18.Any personal information provided shall be used solely for processing the claim and for contact with the claimant and may be transmitted to the insurance provider to which civil responsibility for damages has been transferred.

19.Any obligation to repair, substitute, reduce the price or reimburse, if this should be the case, shall occur only for OLI products which have a visible marking or identifying logotype, with defects or non-conformities which have been proved through extensive technical verification. If it is concluded that the product is not defective, the expenses paid by OLI shall be invoiced to the claimant. The product's technical standards at the time of its manufacture shall be the basis for its conformity assessment.

20.OLI cannot be directly held responsible by the purchaser if the product's non-conformity results from actions by the resellers (or other commercial agents) of OLI products, namely when non-conformity results from statements made by the sales representative regarding the product, its qualities and use conditions, which are different from the product's indications and instructions, including the information contained in manuals and instruction guides provided with the products or published on the company's website.

21.The consumer's rights and obligations are established in the Legal Regime for the Sale and Warranty of Consumer Goods (Law-Decree No 67/2003, of 8th April, and its subsequent alterations, specifically those foreseen by Law-Decree No 84/2008, of 21st May), as well as the Consumer Protection Act (Law No 24/96, of 31st July).

22.Any litigation resulting from the terms or interpretation of the present warranty, or of the purchase and sales contract from which the warranty results, is regulated by Portuguese law and resolved in the court of the competent legal jurisdiction where the headquarters of the warranty provider, OLI, are located, with express waiver of any other, except in cases where OLI and the beneficiary of the warranty have agreed to settle the litigation in an arbitration court.

23.This warranty binds OLI according to its exact terms, except typographical errors.



Inspired by water...



For decades, OLI has been developing and producing sanitary installation systems aimed at innovation. The dual flush cistern and the inlet valve were two major inventions. Currently, OLI is a worldwide reference. It has over 40 active patents in Europe resulting from a continuous investment in Research and Development, guided by the constant challenge of water sustainability. Its know-how is acknowledged by its means and technologically advanced resources and the partnerships established with universities and research centres. In its factory in Aveiro, OLI controls the value chain: there, the idea emerges, the mould is produced, production takes place and the product is marketed in over 80 markets throughout the five continents. The rising importance of contemporary design and of the incorporation of new technologies and materials, clearly shown in the solutions presented in this catalogue, reaffirm OLI as a brand of excellence



OLI-Sistemas Sanitários, S.A.
Travessa do Milão, Esgueira
3800-314 Aveiro, Portugal

T (+351) 234 300 200
F (+351) 234 300 212
www.oli-world.com
export@oli-world.com

Inspired by water...